

Mbsm.pro, Electrolux, HPY14AA, LBP, R600a, 1/5 HP, 220-240V/1/50Hz

Category: compressor


written by Lilianne | 28 January 2024




SHOT ON OPPO

Private Picture Copyright : WWW.MBSM.PRO



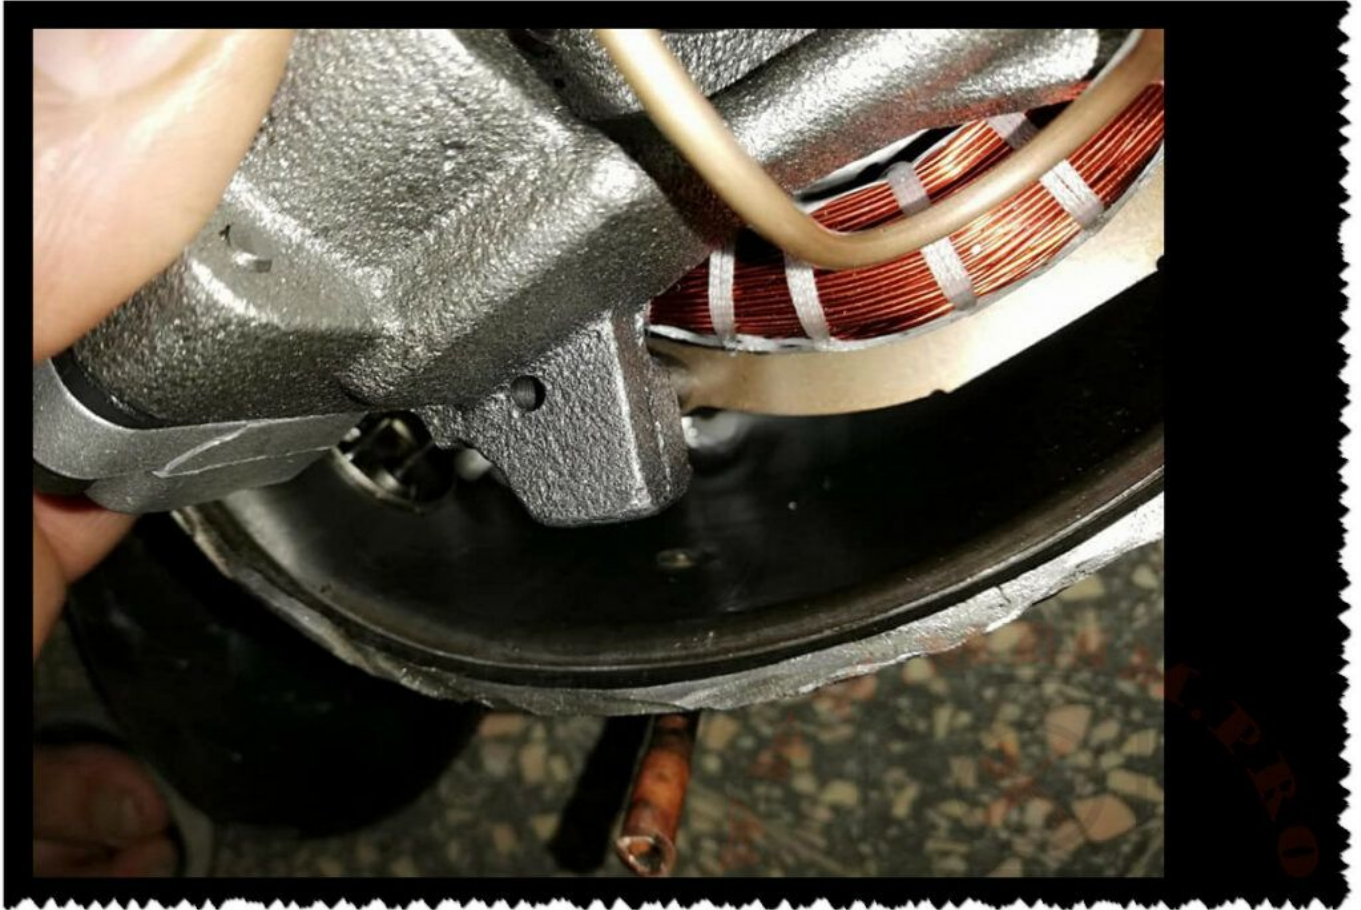

Private Picture Copyright : WWW.MBSM.PRO

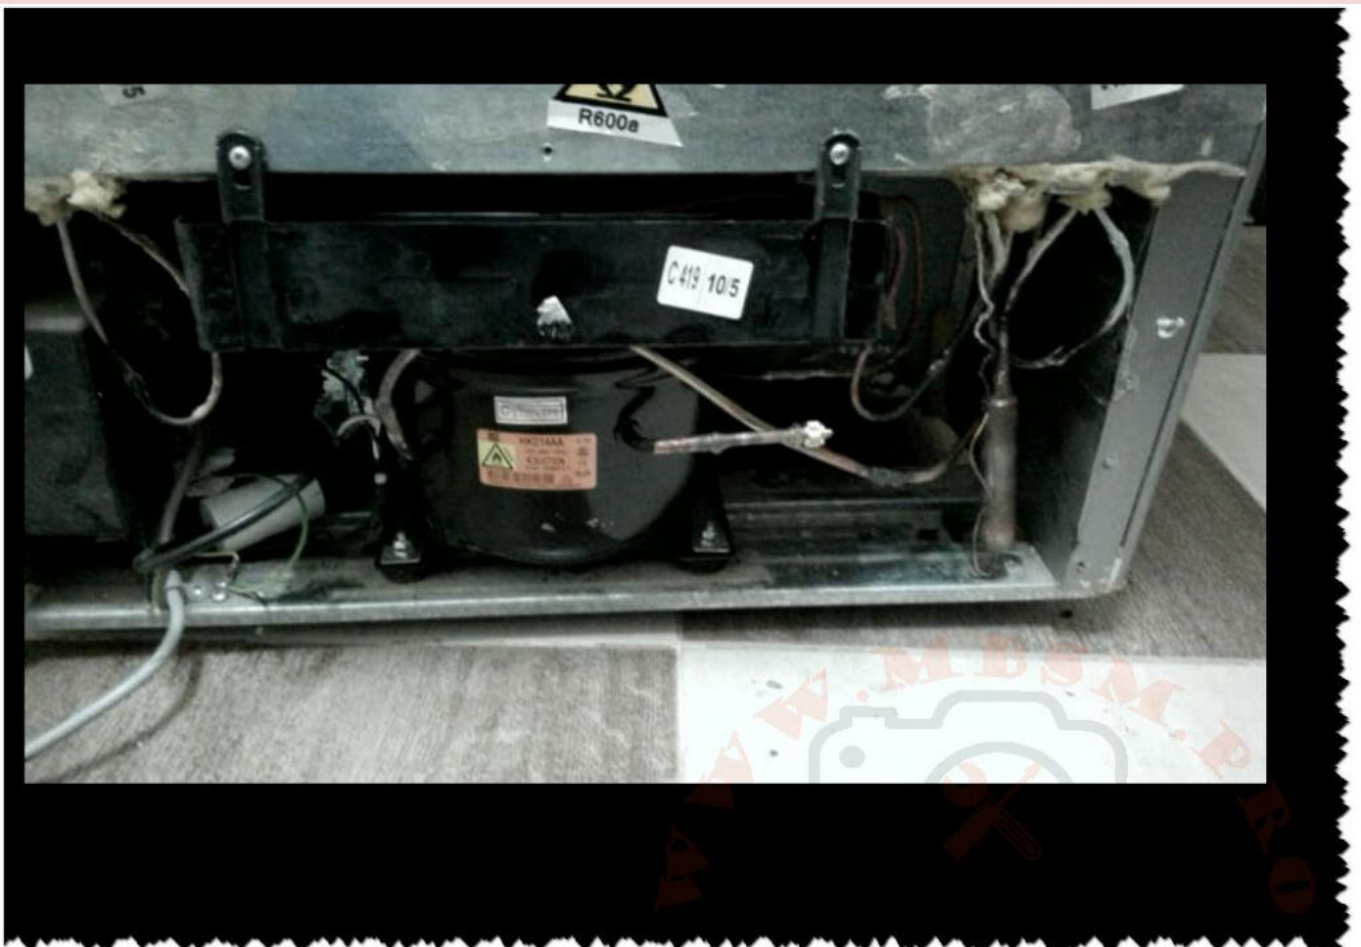


Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



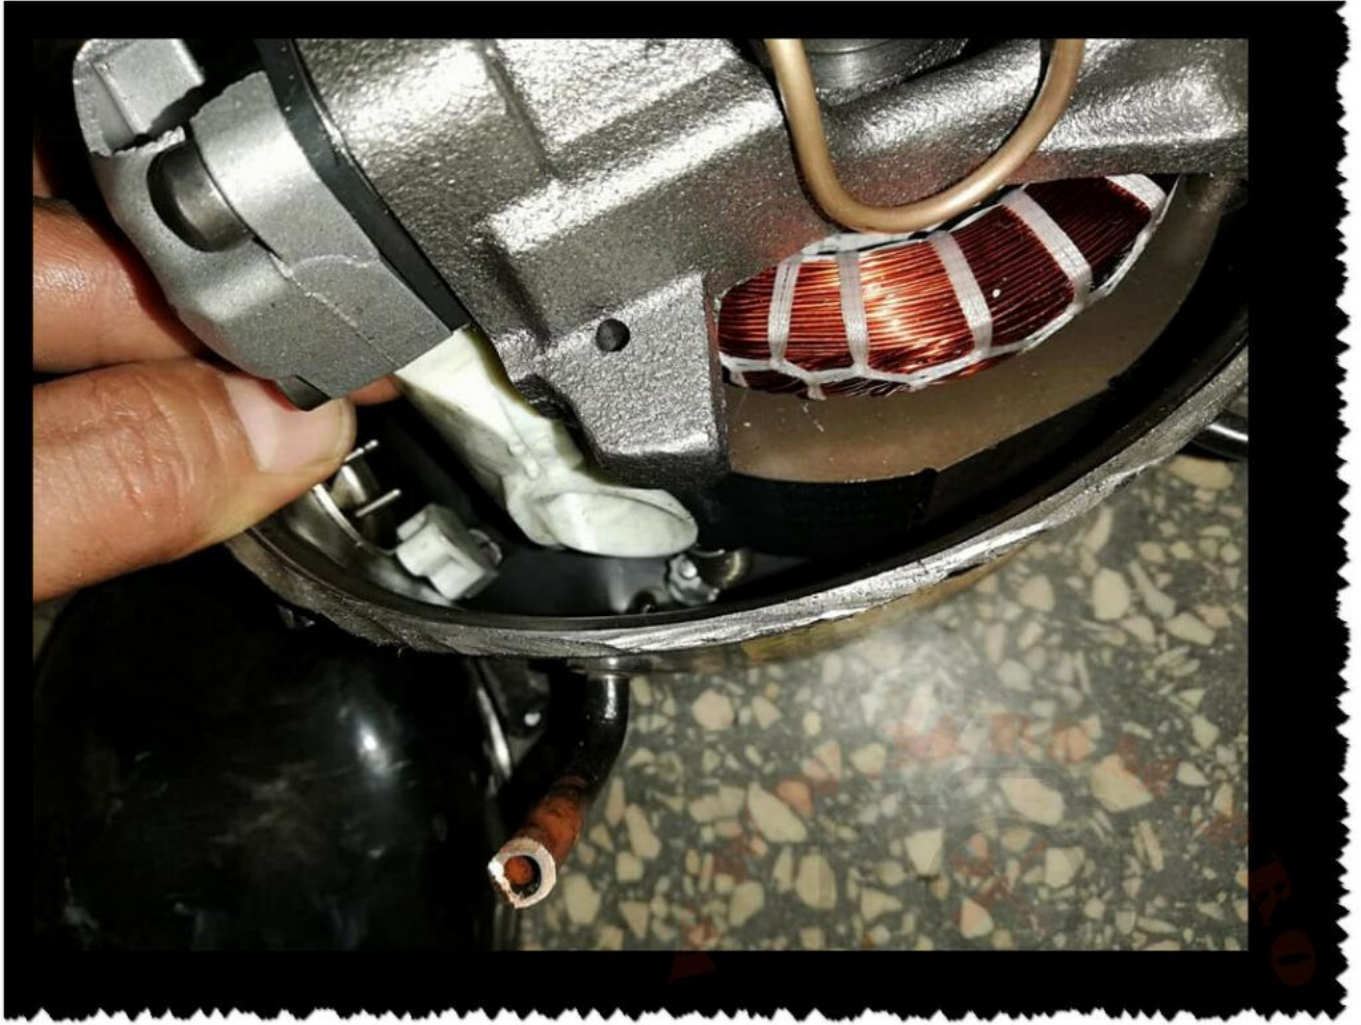





SHOT ON OPPO

Private Picture Copyright : WWW.MBSM.PRO

中效系列 Medium Efficiency Range

HTT57AA	Cu/Al	5.7	1/12	RSCR	50	97		60		1.62
HTT75AA	Cu	7.5	1/9	RSCR	50	125		78		1.60
HTT86AA	Cu	8.6	1/9	RSCR	50	140		82		1.70
HTT93AA	Cu	9.3	1/8	RSCR	50	150		90		1.66
HTT10AA	Cu	10.0	1/7	RSCR	50	170		97		1.75
HTT11AA	Cu	11.0	1/7	RSCR	50	185		106		1.75
HPKD140A	Al	8.6	1/8	RSIR/RSCR	50	140	85	80	1.65	1.75
HPKD160A	Al	9.3	1/7	RSIR/RSCR	50	160	96	90	1.67	1.78
HPKD190A	Al	11.4	1/6	RSIR/RSCR	50	210	124	119	1.70	1.77

高效系列 High Efficiency Range

HKD57AA	Cu	5.7	1/12	RSCR	50	98		56		1.76
HKD75AA	Cu	7.5	1/10	RSCR	50	125		70		1.79
HKD86AA	Cu	8.6	1/9	RSCR	50	140		78		1.80
HKD93AA	Cu/Al	9.3	1/8	RSCR	50	160		86		1.87
HKD14AA	Cu	14.0	1/5	RSCR	50	240		133		1.80
HKD16AA	Cu	16.0	1/5	RSCR	50	270		150		1.80
HPKX160A	Cu	9.3	1/9	RSCR	50	160		82		1.94
HPKX190A	Cu	11.4	1/7	RSCR	50	208		107		1.95

Private Picture Copyright : WWW.MBSM.PRO

TECHNICAL CHARACTERISTICS			SCHEME COMPRESSORS		OF	ELECTRIC DIAGRAMS		ASSEMBLY		TECHNICAL SCHEMES					
Model	Motor	Speed range	Displ. cm ³	Motor type	Freq. hz	Cooling Capacity, w -23.3 °C/(+7.2 °C)*		Input Power, BT		COP, w/w		Run Capacitor, μF	Height, mm	Net Weight, kg	Type of cooling, S/F
								without RC	with RC	without RC	with RC				
HDL100A	Al	-	5,7	RSCR	50	98	-	60	-	1,64	2,5	161	6,9	-	
HDL100A(I)	Cu/Al	-	5,7	RSCR	50	98	-	57	-	1,72	2,5	164	7,2	-	
HDL125A	Al	-	7,0	RSCR	50	123	-	72	-	1,70	2,5	164	7,2	-	
HDL125A (I)	Cu/Al	-	7,0	RSCR	50	123	-	69	-	1,79	2,5	164	7,2	-	
HDL140A	Al	-	8,0	RSCR	50	140	-	80	-	1,74	2,5	164	7,2	-	
HDL160A	Al	-	9,2	RSCR	50	160	-	90	-	1,77	3	164	7,2	-	
HDL170A	Al	-	9,5	RSCR	50	172	-	101	-	1,70	4	164	7,2	-	
HDL190A	Cu/Al	-	10,5	RSCR	50	185	-	106	-	1,75	4	164	7,2	-	
HDL200A	Cu/Al	-	12,0	RSCR	50	200	-	118	-	1,70	4	164	7,2	-	
HDL80A	Al	-	4,9	RSCR	50	80	-	49	-	1,62	2	161	6,9	-	
HML100A	Al	-	5,7	RSCR	50	98	-	71	-	1,39	2	152	6,3	-	
HML125A	Al	-	7,0	RSCR	50	125	-	83	-	1,45	2	152	6,3	-	
HML140A	Al	-	8,0	RSCR	50	140	-	90	-	1,56	3	152	6,3	-	
HML170A	Al	-	9,5	RSCR	50	165	-	114	-	1,45	3	161	6,9	-	
HML200A	Al	-	12,0	RSCR	50	200	-	138	-	1,45	4	164	7,2	-	
HML80A	Al	-	4,9	RSCR	50	80	-	55	-	1,45	2	152	6,3	-	
HPL100A	Cu	-	5,7	CSCR	50	100	-	51	-	1,96	2	161	7,3	-	
HPL125A	Cu	-	7,0	CSCR	50	125	-	64	-	1,96	2	161	7,3	-	
HPL140A	Cu	-	8,0	CSCR	50	145	-	74	-	1,95	2	161	7,3	-	
HXL100A	Cu	-	5,7	RSCR	50	98	-	52	-	1,87	2	161	7,3	-	
HXL125A	Cu	-	7,0	RSCR	50	123	-	65	-	1,90	2	161	7,3	-	
HXL140A	Cu	-	8,0	RSCR	50	140	-	73	-	1,91	2	161	7,3	-	
HXL170A	Cu	-	9,3	RSCR	50	175	-	93	-	1,88	2	161	7,3	-	
HXL190A	Cu	-	10,5	RSCR	50	190	-	103	-	1,85	3	164	7,3	-	
HXL190A (B)	Cu	-	12,0	RSCR	50	200	-	108	-	1,85	3	164	7,3	-	

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_hkd14aaTélécharger