

Mbsm.pro, Compressor, Sikelan, GQR14, GQR14tg, HBP, R134a, freezing

written by Lilianne | 29 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Sikelan, GQR14, HBP, R134a

**Mbsm.pro, Bristol,
Compressor, H20B243ABC, 24000
btu, r22, 220 v 50hz, 2 ton ,
D6789205, AB5522G,**

written by Lilianne | 29 April 2023

14:06


4G 21%



Mbsm.pro, Bristol, Compressor, H20B243ABC, 24000 btu, r22, 220 v 50hz, 2 ton , D6789205, AB5522G,

**Mbsm.pro, Compressor,
tgl27878, tgl27 878, VEB dkk
Scharfenstein, 1993, R12, 3/8
hp++, 1/2 hp-, 385 w, Cooling
Compressor, 0 °C 10 °C,
Replaced by GP12TB**

written by Lilianne | 29 April 2023

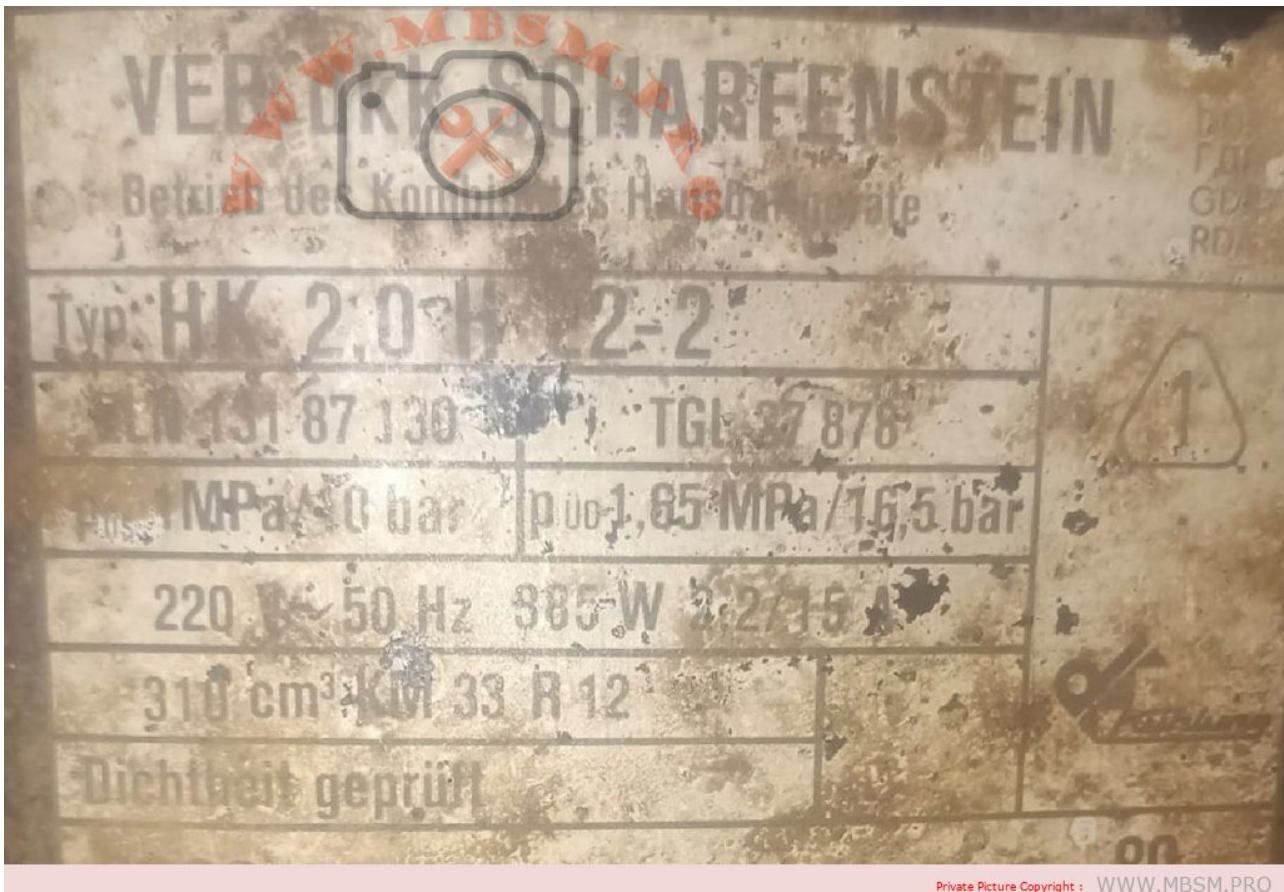

Mbsm.pro, Compressor, tgl27878, tgl27 878, VEB dkk Scharfenstein,1993, R12, 3/8 hp++, 1/2 hp-, 385 w, Cooling Compressor, 0 °C 10 °C, Replaced by GP12TB

Mbsm.pro, Picture, Compressor R600a

written by Lilianne | 29 April 2023

型号 Model	气缸容积 Displacement cm³	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity			COP				认证 Certification	最大高度 "A" Max. Height "A"
				ASHRAE	AHAM	CECOMAF	ASHRAE	AHAM	CECOMAF			
				-23.3°C	-23.3/ 40.5°C	-25°C	-23.3°C	-23.3/ 40.5°C	-25°C			
LBP												
115V 60HZ R600a												
T 系列 T Series												
ETZ50U6	5.0	ST	RSCR	96 328	104.9	71.9	1.70	5.8	2.00	1.33	UL	182
ETZ60U6	6.0	ST	RSCR	120 409	131.1	89.9	1.70	5.8	2.00	1.33	UL	182
ETZ72U6	7.2	ST	RSCR	142 485	154.5	107.3	1.70	5.8	2.00	1.33	UL	182
ETZ80U6	8.0	ST	RSCR	165 563	179.5	124.7	1.70	5.8	2.00	1.33	UL	182
ETB60U6	6.0	ST	RSCR	120 409	130.6	90.7	1.83	6.2	2.16	1.43	UL	185
ETB72U6	7.2	ST	RSCR	145 495	157.8	109.6	1.83	6.2	2.16	1.43	UL	185
ETB80U6	8.1	ST	RSCR	167 570	181.7	126.5	1.83	6.2	2.16	1.43	UL	185
ETB90U6	9.0	ST	RSCR	190 648	206.7	143.9	1.83	6.2	2.16	1.43	UL	185
ETB110U6	10.7	ST	RSCR	220 751	239.4	166.7	1.81	6.1	2.14	1.42	UL	185
S 系列 S Series												
ESD60U6	6.0	ST	RSIR	120 409	/	89.7	1.45	4.9	/	1.13	UL	162.5
ESD72U6	7.2	ST	RSIR	145 495	/	109.3	1.45	4.9	/	1.13	UL	162.5
ESD80U6	8.0	ST	RSIR	165 563	/	124.6	1.45	4.9	/	1.13	UL	162.5
ESY60U6	6.0	ST	RSCR	120 409	/	90.8	1.60	5.5	/	1.25	UL	171
ESY80U6	8.0	ST	RSCR	165 563	/	124.5	1.60	5.5	/	1.25	UL	171
Y 系列 Y Series												
EVA40U6	4.0	ST	RSIR	70 239	76.1	52.8	1.40	4.8	1.66	1.09	UL	153
EVA55U6	5.5	ST	RSIR	105 358	114.2	79.5	1.40	4.8	1.66	1.09	UL	153
220 ~ 240V 60HZ R600a												
T 系列 T Series												
ETH46X6	4.5	ST	RSCR	85 290	/	64.2	1.76	6.0	/	1.38	VDE/CB	185
100V 50HZ R600a												
T 系列 T Series												
ETD50F	5.0	ST	RSCR	80 273	/	60.2	1.40	4.8	/	1.09	—	179
ETD72F	7.2	ST	RSCR	125 427	/	94.3	1.40	4.8	/	1.10	—	179
ETD80F	8.1	ST	RSCR	145 495	/	108.5	1.40	4.8	/	1.10	—	179
100V 60HZ R600a												
T 系列 T Series												
ETD50F	5.0	ST	RSCR	95 324	/	71.8	1.50	5.1	/	1.17	—	179
ETD72F	7.2	ST	RSCR	145 495	/	109.8	1.50	5.1	/	1.18	—	179
ETD80F	8.1	ST	RSCR	165 563	/	124.0	1.50	5.1	/	1.17	—	179
127V 60HZ R600a												
T 系列 T Series												
ETH46V6	4.5	ST	RSCR	85 290	/	63.7	1.76	6.0	/	1.38	VDE/CB	185





R600a COMPRESSOR R600a压缩机

Model 型号	Displacement 排量 cm ³	Motor 电机 Type	Power 功率 W	Capacity 容量 kg	Refrigerant 制冷剂 R600a	Performance 性能		Motor Temp. 电机温度 °C	Operating Operating Temp. °C	Cooling Cooling Capacity kW			
						ASHRAE -23.3°C	ASHRAE -23.3°C						
115V 60Hz R600a													
T Series													
RT2500	5.0	ST	85CR	96	128	104.9	71.9	1.70	5.8	2.00	1.31	UL	182
RT2600	6.0	ST	85CR	120	409	111.1	89.9	1.70	5.8	2.00	1.31	UL	182
RT2720	7.2	ST	85CR	142	485	124.5	107.3	1.70	5.8	2.00	1.31	UL	182
RT2800	8.0	ST	85CR	165	563	179.5	124.7	1.70	5.8	2.00	1.31	UL	182
RT9000	9.0	ST	85CR	120	409	130.4	90.7	1.83	6.2	2.16	1.43	UL	185
RT9720	7.2	ST	85CR	145	495	157.8	109.6	1.83	6.2	2.16	1.43	UL	185
RT8000	8.1	ST	85CR	167	570	181.7	126.5	1.83	6.2	2.16	1.43	UL	185
RT9000	9.0	ST	85CR	190	648	206.7	143.9	1.83	6.2	2.16	1.43	UL	185
RT8100	10.7	ST	85CR	220	751	239.4	166.7	1.83	6.1	2.14	1.42	UL	185
S Series													
RS2600	6.0	ST	RSR	120	409	/	89.7	1.45	4.9	/	1.13	UL	162.5
RS2720	7.2	ST	RSR	145	495	/	109.3	1.45	4.9	/	1.13	UL	162.5
RS2800	8.0	ST	RSR	165	563	/	124.6	1.45	4.9	/	1.13	UL	162.5
RS9000	9.0	ST	RSR	120	409	/	90.8	1.60	5.5	/	1.25	UL	171
RS9800	8.0	ST	RSR	145	563	/	124.5	1.60	5.5	/	1.25	UL	171
V Series													
RV4000	4.0	ST	RSR	70	210	76.1	52.8	1.40	4.8	1.66	1.09	UL	153
RV5500	5.5	ST	RSR	105	318	114.2	79.5	1.40	4.8	1.66	1.09	UL	153
220 ~ 240V 60Hz R600a													
T Series													
RT4600	4.5	ST	RSR	85	290	/	64.2	1.76	6.0	/	1.38	VDE/CB	185
100V 50Hz R600a													
T Series													
RTD50	5.0	ST	RSR	80	273	/	60.2	1.40	4.8	/	1.09	—	179
RTD72	7.2	ST	RSR	125	427	/	94.3	1.40	4.8	/	1.10	—	179
RTD80	8.1	ST	RSR	145	495	/	108.5	1.40	4.8	/	1.10	—	179
100V 60Hz R600a													
T Series													
RTD50	5.0	ST	RSR	95	324	/	71.8	1.50	5.1	/	1.17	—	179
RTD72	7.2	ST	RSR	145	495	/	109.8	1.50	5.1	/	1.18	—	179
RTD80	8.1	ST	RSR	165	563	/	124.0	1.50	5.1	/	1.17	—	179
127V 60Hz R600a													
T Series													
RT4600	4.5	ST	RSR	85	290	/	63.7	1.76	6.0	/	1.38	VDE/CB	185

Private Picture Copyright : WWW.MBSM.PRO



Model 型号	Displacement 排量 cm ³	Motor 电机 Type	Power 功率 W	Cooling Capacity 制冷量			COP			Certification 认证	Max. Height "A" 最大高度 "A"		
				ASHRAE -23.3°C	ASHRAE -23.3°C	ASHRAE -23.3°C	ASHRAE -23.3°C	ASHRAE -23.3°C	ASHRAE -23.3°C				
115V 60Hz R600a													
T Series													
RT2500	5.0	ST	85CR	96	128	104.9	71.9	1.70	5.8	2.00	1.31	UL	182
RT2600	6.0	ST	85CR	120	409	111.1	89.9	1.70	5.8	2.00	1.31	UL	182
RT2720	7.2	ST	85CR	142	485	124.5	107.3	1.70	5.8	2.00	1.31	UL	182
RT2800	8.0	ST	85CR	165	563	179.5	124.7	1.70	5.8	2.00	1.31	UL	182
RT9000	9.0	ST	85CR	120	409	130.4	90.7	1.83	6.2	2.16	1.43	UL	185
RT9720	7.2	ST	85CR	145	495	157.8	109.6	1.83	6.2	2.16	1.43	UL	185
RT8000	8.1	ST	85CR	167	570	181.7	126.5	1.83	6.2	2.16	1.43	UL	185
RT9000	9.0	ST	85CR	190	648	206.7	143.9	1.83	6.2	2.16	1.43	UL	185
RT8100	10.7	ST	85CR	220	751	239.4	166.7	1.83	6.1	2.14	1.42	UL	185
S Series													
RS2600	6.0	ST	RSR	120	409	/	89.7	1.45	4.9	/	1.13	UL	162.5
RS2720	7.2	ST	RSR	145	495	/	109.3	1.45	4.9	/	1.13	UL	162.5
RS2800	8.0	ST	RSR	165	563	/	124.6	1.45	4.9	/	1.13	UL	162.5
RS9000	9.0	ST	RSR	120	409	/	90.8	1.60	5.5	/	1.25	UL	171
RS9800	8.0	ST	RSR	145	563	/	124.5	1.60	5.5	/	1.25	UL	171
V Series													
RV4000	4.0	ST	RSR	70	210	76.1	52.8	1.40	4.8	1.66	1.09	UL	153
RV5500	5.5	ST	RSR	105	318	114.2	79.5	1.40	4.8	1.66	1.09	UL	153
220 ~ 240V 60Hz R600a													
T Series													
RT4600	4.5	ST	RSR	85	290	/	64.2	1.76	6.0	/	1.38	VDE/CB	185
100V 50Hz R600a													
T Series													
RTD50	5.0	ST	RSR	80	273	/	60.2	1.40	4.8	/	1.09	—	179
RTD72	7.2	ST	RSR	125	427	/	94.3	1.40	4.8	/	1.10	—	179
RTD80	8.1	ST	RSR	145	495	/	108.5	1.40	4.8	/	1.10	—	179
100V 60Hz R600a													
T Series													
RTD50	5.0	ST	RSR	95	324	/	71.8	1.50	5.1	/	1.17	—	179
RTD72	7.2	ST	RSR	145	495	/	109.8	1.50	5.1	/	1.18	—	179
RTD80	8.1	ST	RSR	165	563	/	124.0	1.50	5.1	/	1.17	—	179
127V 60Hz R600a													
T Series													
RT4600	4.5	ST	RSR	85	290	/	63.7	1.76	6.0	/	1.38	VDE/CB	185

Private Picture Copyright : WWW.MBSM.PRO

Verdichter - Cubigel R-600a, LBP

Hermetische Verdichter für Kapillarbetrieb.
 Nachbestellungs-Verdichter mit Betriebskondensatoren.
 LBP: Temperaturbereich: -30 °C bis -10 °C.
 Netzspannung 220 - 240 V / 50 Hz



Artikel	Typ	Leistung (PK)	Kühlleistung (W) t ₁ -25 °C, t ₂ +45 °C	
			-25	-15
47-02 HCF10AA	HCF 45 AA	0,12	33	33
47-02 HCF25AA	HCF 55 AA	0,19	42	42
47-02 HCF30AA	HCF 55 AA	0,19	50	50
47-02 HCF30AA	HCF 80 AA	0,27	55	55
47-02 HCF30AA	HCF 90 AA	0,27	109	109
47-02 HCF30AA	HCF 95 AA	0,36	119	119
47-02 HPF12AA	HPF 12 AA	0,75	144	144
47-02 HPF14AA	HPF 14 AA	0,75	190	190
47-02 HPF15AA	HPF 15 AA	0,75	181	181

Private Picture Copyright : WWW.MBSM.PRO

**Mbsm.pro, Compressor
 Tecumseh, AE 4425 Z ,
 AE-8007-f, AE4425Z-FZ, H/MBP,
 AE 4425 Z, AEZ 4425 Z, 1/5
 hp++, 1/4 hp-, r404a**

written by Lilianne | 29 April 2023



Mbsm.pro, Compressor Tecumseh, AE 4425 Z , AE-8007-f, AE4425Z-FZ, H/MBP, AE 4425 Z, AEZ 4425 Z, 1/5 hp++, 1/4 hp-, r404a

Mbsm.pro, Compressor, Lg, msa24Ladg, Serie MSA, 1/12 hp, r134a, Small and medium size refrigerator, Freezer Water dispenser, 220 v , 1ph

written by Lilianne | 29 April 2023



Mbsm.pro, Compressor, Lg, msa24Ladg, Serie MSA, 1/12 hp, r134a, Small and medium size refrigerator, Freezer Water dispenser, 220 v , 1ph

Mbsm.pro, Compressor, an36vbfmt, Mitsubishi, 3.55 hp, r140a, 33000 btu, 220 v, 1ph

written by Lilianne | 29 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, an36vbfmt, Mitsubishi, 3.55 hp, r140a,

33000 btu, 220 v, 1ph

Mbsm.pro, COMPRESSOR, ANA90K (1/3HP), ATA80X (1/4HP), ATD66XL(1/5HP), ATD55XL (1/6HP)

written by Lilianne | 29 April 2023



Mbsm.pro, COMPRESSOR, ANA90K (1/3HP), ATA80X (1/4HP),
ATD66XL(1/5HP), ATD55XL (1/6HP)

Mbsm.pro, COMPRESSOR, HERMETIC, 1/4 hp, 1bp, r134a, UNIT-TECUMSEH, TECUMSEH, AEZ2380Y

written by Lilianne | 29 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, COMPRESSOR, HERMETIC, 1/4 hp, 1bp, r134a, UNIT-TECUMSEH, TECUMSEH, AEZ2380Y

Mbsm.pro, IRIS, CF255, Freezers, 255 L, Compressor 1/8 hp, r600a, 66 G, 89 w

written by Lilianne | 29 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, IRIS, CF255, Freezers, 255 L, Compressor 1/8 hp, r600a, 66 G, 89 w