

Copeland, Piston Type, Maneurop, Scroll type, Compressor

written by Lilianne | 17 March 2021

Copeland, Piston Type, Maneurop, Scroll type, Compressor

Copeland - Piston Type

CRFD-0250TFD	2.5HP	220	30
CRFD-02750TFD	<3HP	220	30
CRFD-02750TFD	<3HP	380	30
CRFD-0300TFD	3HP	220	30
CRFD-0300TFD	3HP	380	30
CRFD-0400TFD	4HP	380	30
CRFD-0450TFD	4.5HP	380	30
CRFD-0500TFD	5HP	380	30

Copeland - Scroll Type

ZR22KC	2HP	220	16
ZR28KC	2.5HP	220	16
ZR34K1	3HP	220	16
ZR34K3	3HP	380	16
ZR36K1	>3HP	220	16
ZR36K3	>3HP	380	16
ZR47K3	4HP	380	16
ZR57K3	5HP	380	16
ZR61K3	>5HP	380	16
ZR72K3	6HP	380	16
ZR81K3	7HP	380	16
ZR94K3	8HP	380	16
ZR125K3	10HP	380	12
ZR144K3	12HP	380	12

Copeland - Piston type

QR90K1	7.5HP	380	4
QR12M1	10HP	380	4
QR15M1	12HP	380	4

Maneurop - Piston Type

MT28	7378BTU	220	8
MT36	9272BTU	380	8
MT40	10475BTU	380	8
MT50	12324BTU	380	8
MT64	15820BTU	380	8
MT80	19534BTU	380	8
MT100	23403BTU	380	4
MT125	30429BTU	380	4
MT160	38273BTU	380	4

Bristol - Piston type

H2NG104FRDF	8HP	380	8
H2NG124FRDF	10HP	380	8
H25G144DBEE	10HP	380	8
H2NG184FRDF	15HP	380	4
H2NG204FRDF	17HP	380	4
H2NG244FRDF	20HP	380	4
H2NG294FRDF	25HP	380	4
H24B25QDBEA	2HP	380	20
H24B28QDBEA	2.5HP	380	20
H24B31QDBEA	3HP	380	20
H24A62QDBEA	5HP	380	20

Compressor, ROHS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

written by Lilianne | 17 March 2021



Private Picture Copyright: WWW.MBSM.PRO

Basic Info.

Model NO.
CAE4448Y
Refrigerant Type
Ammonia
Refrigerant

R134A

Voltage

208V/50Hz 230V/60Hz

Horsepower

1/3HP

Capacity(W)

519W

Input Power(Kw)

400W

Oil Charge (Cm3)

450

Net Weight(Kg)

12kg

Cop(W/W)

1.64

Trademark

tecumseh

Transport Package

Wooden Box

Specification

208V/50HZ 230V/60HZ

Origin

France

HS Code

8414309010

**1/3HP HBP Original Made in France R134A Tecumseh Compressor
CAE4448Y Refrigerator Compressor For
Refrigerator/Showcase/Cold Room**

Product Description

Model: CAE4448Y

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

Description rapide

Condition:	Nouveau	Type:	Piston
Configuration:	Stationnaire	Source d'énergie:	Alimentation AC
Modèle de lubrifica...	Lubrifié	Muet:	Oui
Point d'origine:	Guangdong, China	Marque nom:	tecumseh
Numéro de Type:	CAE4448Y	Tension:	208 ~ 220V/1PH/50HZ
Dimension (L*W*H):	1 unité	Poids:	20kg
Certification:	ROHS	Garantie:	1 année
Service après-vente...	Aucun service d'outre-mer fourni	Gaz:	R134a
Chevaux:	1/3HP		

Private Picture Copyright: WWW.MBSM.PRO

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	254	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3

Private Picture Copyright: WWW.MBSM.PRO

Basic Info.

Model NO.	CAE4448Y	Refrigerant Type	Ammonia
Refrigerant	R134A	Voltage	208V/50Hz 230V/60Hz
Horsepower	1/3HP	Capacity(W)	519W
Input Power(Kw)	400W	Oil Charge (Cm3)	450
Net Weight(Kg)	12kg	Cop(W/W)	1.64
Trademark	tecumseh	Transport Package	Wooden Box
Specification	208V/50HZ 230V/60HZ	Origin	France
HS Code	8414309010		

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, Lu126cy1, 1/3 Hp, R600a

written by Lilianne | 17 March 2021



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

written by Lilianne | 17 March 2021
Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	–
COP@CECOMAF	–



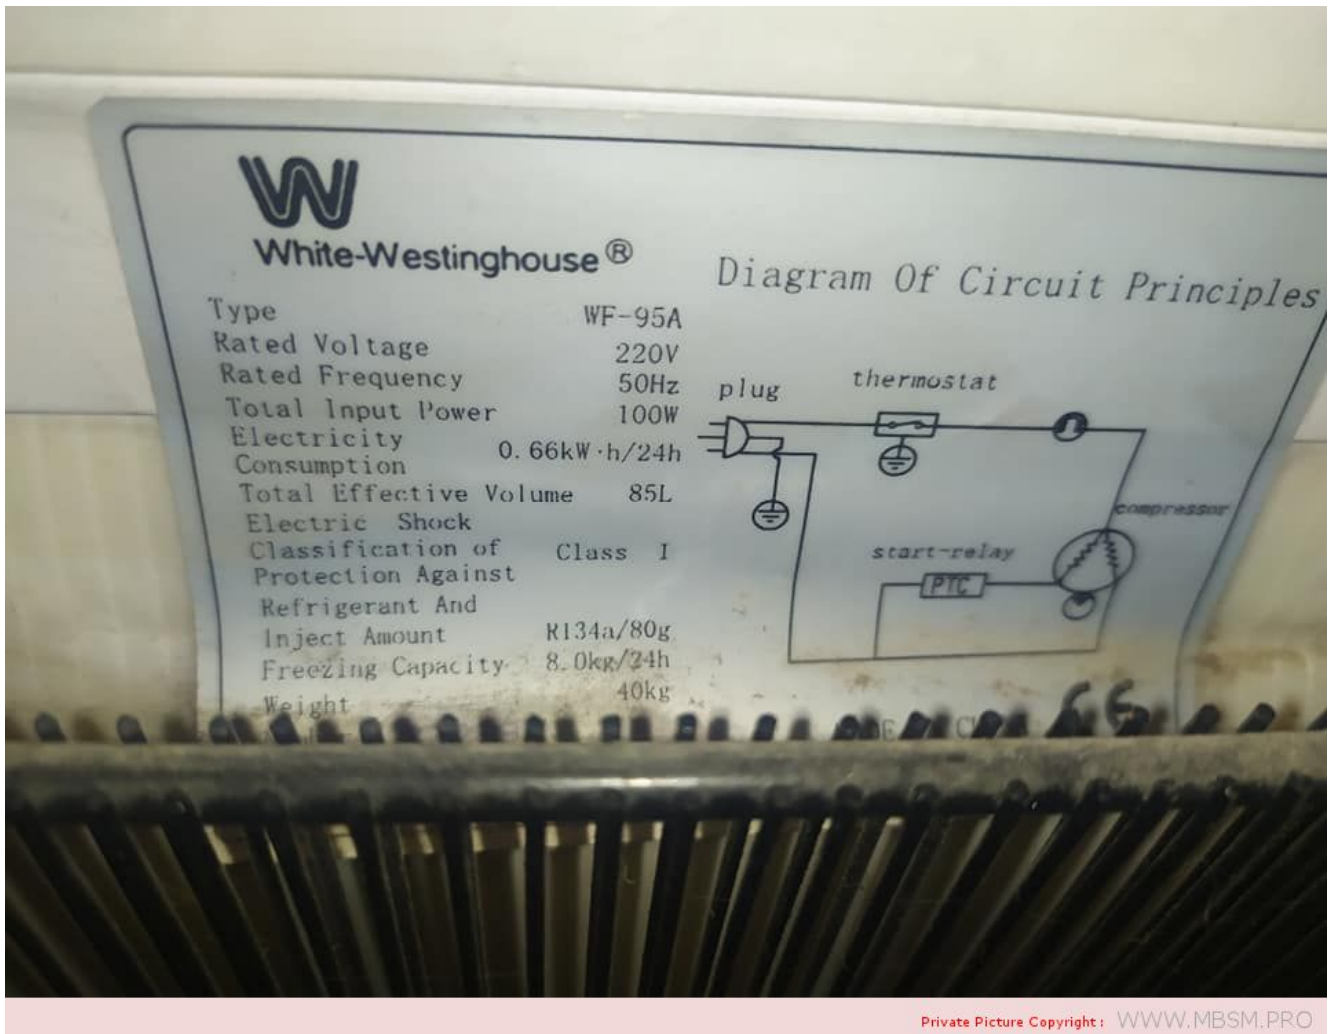

Mbsm_dot_pro_private_PDF_SB48C95GAW5Télécharger

**HERMETIC, Freezer,
COMPRESSOR, ZEL, GTH86AA,
R134A, 1/4 Hp, Lbp, 230W,
8.6CC**

written by Lilianne | 17 March 2021

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

- 1.Low levels of noise and vibration
- 2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ										
Model	Displ.(cm ³)	Motor Type	Cooling capacity(w)	Input Power		COP		Run Capacltor	Start Capacltor	Height(mm)
				without RC(w)	with RC(w)	without RC(w/w)	with RC(w/w)			
Standard Efficiency Range										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
Medium Efficiency Range										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183



**Compressor, NL7.3FT, SECOP,
105G6726, DANFOSS, 6726,
105G, 105 G 6726, 105G 6726,
1/5 HP, 180W, LBP, Zanussi,
Kiriazi Electric Company, TGV**

335L, NO FROST, TSV 320L, FC 83L , R134A, 125G, 220-240V 50Hz, CSIR

written by Lilianne | 17 March 2021

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	

R134A	LBP	1/5	156	NL6FT.2	NL
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (CSIR)	
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	⁺ 4 / (1)	213	NLY7F	
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	⁺ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	⁺ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / HBP	1/3	264	SC12G	SC
R134A	LBP / MBP / HBP	1/2	392	SC18G	
R134A	LBP / MBP / HBP	3/4	456	SC21G	
R134A	MBP	3/4	1073	SC21MFX	
R134A	LBP	3/4	567	SC21FTX	
R404A	LBP	1	1033	ST21CL	
R404A	LBP	1	986	SC18CLX.2	
R404A	MBP	1/2	359/650	SC15MLX	
R404A	MBP	7/8	762/1584	SC18MLX	

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product

No Frost Refrigerator

Class

T

Model

E 335N/3

Current / Amp.

1.1/~

Rated Voltage

220-240V/50HZ

Refrigerant

R 134a

125g

Rated input of lamp

1 x 25 W

Total Gross Volume

335 L

Ins : Basic

Type II

IPX4

Total Storge Volume

320 L

Freezing Capacity

4 kg/24hr

Freezer Capacity

83L

ES 6000 / 2008
ES 3793 / 2006

Tow Door Ref.

Serial Number

Made in Egypt



REDMI NOTE 8
AI QUAD CAMERA



● ○ REDMI NOTE 8
∞ AI QUAD CAMERA



Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-20
11_desd406c102Télécharger



Refrigeration, Compressor, K270CZ1, 1/3++, DONPER, Dongbei , K325CZ1, K375CZ1 , freezer, R134a, White HIK- BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

written by Lilianne | 17 March 2021
Quick Details

Temperature:
-25° ~ +15°

Cooling Capacity:
1ton

Panel Thickness:
50mm

Applicable Industries:
Retail

After Warranty Service:
Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L*W*H):

10-10*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:
New Product 2020

Warranty of core components:
1 Year

Core Components:
Motor

Color:
Balck

Product name:
Refrigerator Compressor

Refrigerant:
R134a

model:
K270CZ1

Cooling capacity:
230W

Product Description

Refrigerant	R134a	Cooling capicity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm ³
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm ³	Weight	9.8±0.4kg

Structure



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO



Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500
Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control, Digital Display, 75mm Insulation Wall Thickness, Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm

Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness

- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details	Box Dimensions: 1695 x 760 x 880mm Included:1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays
-------------------	--





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg



Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

written by Lilianne | 17 March 2021



Mbsm_dot_pro_private_PDF_QA66C14GAX5Télécharger

Mbsm_dot_pro_private_PDF_QA66C14GAX5-Télécharger

Reciprocating Compressors, LBP – Low Back Pressure, R-134a, TECUMSEH, 1/3hp,

TP1410YS,

written by Lilianne | 17 March 2021

TPH1410YHS

Wholesale and retail Tecumseh/Taikang compressor, Tecumseh/Taikang piston compressor model: TPH1410YHS, type: low back pressure, refrigerant: R-134a, power supply voltage: 230V ~ 50Hz, provide Tecumseh/taikang TPH1410YHS model, specifications, parameters, Picture, price and other data. Taikang is the world's leading manufacturer of hermetic compressors and condensers in household and commercial refrigeration and air conditioning applications Product model: TPH1410YHS Refrigerant: R-134a Power frequency: 50Hz Power supply voltage: 230V ~ 50Hz Product Type: Low back pressure



Mbsm_dot_pro_private_PDF_TP1410YS-Télécharger

Mbsm_dot_pro_private_PDF_TPH1410YGSTélécharger


**Freezer, AHT, Paris 185,
freezer compressor, 400w,
R290, 90 g, 571 liters,
inverter compressor, Dc
compressor, 1/2HP, Secop**

compressor

written by Lilianne | 17 March 2021

FREEZER AHT PARIS 185 (-) VS AD

×

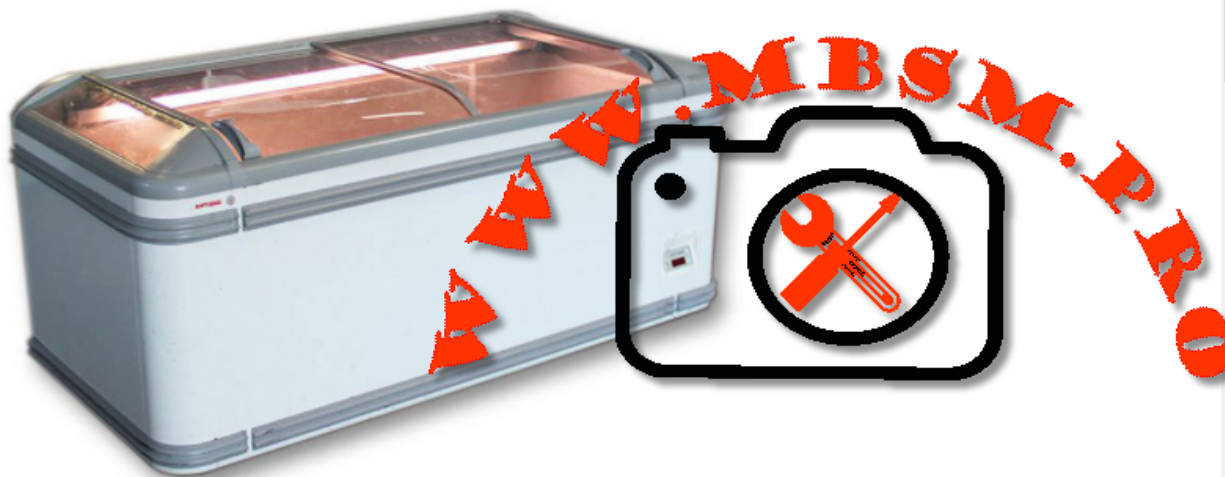

Private Picture Copyright: WWW.MBSM.PRO



Mbsm_dot_pro_private_PDF_Super-Market-Freezer-AHT_ParisTélécharger

- Gross Content: 571 liters
- Net Content: freezing: 571 liters
- Display Area: 1,02 m²
- Ambient Temperature: +16 to +25 ° C
- Temperature Range: (Standard setting is freezing – change of temperature setting only by service technician): Freezing: -18 °C to -23 °C
- Rated Voltage / Nominal Frequency: 220 – 240 V / 50 Hz
- Rated Power Consumption: 400 W
- Rated Power Consumption Light: 41 W
- Rated Current: 1.8 A
- Protection: 16 A

- Energy consumption (at 25 °C): Freezing: 6.1 kWh / 24 h
- Length of Connection Cable: 1750 mm
- Refrigerant: R290
- Refrigerant Quantity: 90 g
- Max. Permissible Operating Pressure: 30 bar
- Length (Outside / Inside): 1854 / 1723 mm
- Depth (Outside / Inside): 853 / 723 mm
- Working Height (Front / Outside Height): 770 / 833 mm
- Stacking Height: Cooling: 380 mm / Freezing: 550 mm
- Weight (net): 120 kg
- Lighting: fluorescent tube

Meuble congélateur AHT EQ PARIS 185 – rénové

CONGÉLATEUR QUI COMBINE QUALITÉ, FLEXIBILITÉ ET EFFICACITÉ

Le congélateur / réfrigérateur enfichable qui redéfinit l'économie et élève la présentation du produit à un niveau innovant. PARIS maximise également votre espace de vente au moyen d'inserts d'étagères, ce qui augmentera encore vos revenus. PARIS – un multitalent extrêmement efficace qui peut prétendre à une excellence prestigieuse.

AHT EQ – congélateurs d'occasion qui maximisent l'affichage de votre produit

- Grand stock jusqu'à 1000 pièces disponibles à la commande
- Garantie de six mois sur les pièces du congélateur
- Livraison rapide
- Les documents d'exportation peuvent être organisés sur demande
- Possibilité de charger des camions ou des conteneurs pleins
- Tous les congélateurs AHT EQ d'occasion sont

soigneusement testés et remis à neuf dans notre atelier avant les navires

- Livraison internationale
- Emballage carton d'origine AHT Cooling Systems GmbH inclus par défaut
- Emballage d'origine renforcé AHT Cooling Systems GmbH pour les expéditions longue distance contre les routes lourdes

Avantages clés

- Une économie d'énergie élevée peut être obtenue par rapport aux unités ouvertes conventionnelles
- Écologique avec le propane réfrigérant naturel
- 100% sans CFC et sans PFC
- Modèle enfichable ne nécessitant aucune installation supplémentaire
- Faibles coûts d'investissement et d'exploitation
- Système de réfrigération sans entretien
- Compresseur à vitesse contrôlée électronique (VS) – uniquement avec le réfrigérant R290
- La solution parfaite – dégivrage semi-automatique intégré (AD) – uniquement avec le réfrigérant R290

Accessoires

- Séparateurs et jeu de grille – inclus par défaut
- Unité d'éclairage disponible en différentes versions – disponible sur demande
- Pare-chocs de protection contre les chocs disponibles en différentes couleurs – disponibles sur demande
- Couvercles pour mise en ligne – disponibles sur demande
- Les plaques de protection empêchent l'eau et la poussière de tomber sous les armoires – disponibles sur demande
- Le chariot protège contre les chocs physiques – disponible sur demande
- Autres accessoires supplémentaires – disponibles sur

demande

Plages de température

- Congélation: -18 ° C до -23 ° C
- Réfrigération de la viande et de la viande hachée: 0 ° C à $+2\text{ ° C}$ (modèle universel (U) uniquement)
- Plage de température ambiante: $+16\text{ ° C}$ / $+25\text{ ° C}$

Modèles disponibles de congélateur AHT EQ PARIS

- AHT EQ PARIS xxx (-) / (U) / VS / AD / L

Informations utiles

- AD – dégivrage automatique (deux fois par semaine – standard)
- VS – compresseur électronique à vitesse contrôlée
- (-) – modèle standard de congélateur
- (U) – modèle universel d'armoire de congélation / réfrigération
- L – éclairage intérieur néon
- R290 – Réfrigérant ECO R290
- R404a – réfrigérant R404a

Dimensions du congélateur AHT EQ PARIS 185

- Longueur extérieur / intérieur: 1854/1723 mm
- Profondeur extérieur / intérieur: 853/723 mm
- Hauteur d'accès avant / hauteur extérieur: 770/833 mm
- Hauteur d'empilage: 550 mm
- Poids net: 120 kg
- Contenu brut: 800 litres
- Surface d'affichage totale (TDA): 1,02 m²

Données techniques du congélateur AHT EQ ATHEN

- Plug-in 230V / 50HZ
- Longueur du cordon d'alimentation: 2500-3500 mm

Options de localisation flexibles

- Peut être utilisé comme une unité autonome
- Peut être utilisé dans une ligne
- Maximise l'utilisation de l'espace au sol avec une armoire d'extrémité
- Peut être installé sous des étagères à soufflet ou intégré dans des systèmes d'étagères existants