

WITH MORE THAN 50 YEARS OF EXPERIENCE IN COMPRESSOR TECHNOLOGY AND HIGHLY COMMITTED EMPLOYEES, OUR FOCUS IS TO DEVELOP AND APPLY THE

ADVANCED COMPRESSOR TECHNOLOGIES TO ACHIEVE STANDARD SETTING PERFORMANCE FOR LEADING PRODUCTS AND BUSINESSES AROUND THE WORLD.

HERMETIC COMPRESSORS FOR AC VOLTAGE

SECOP

**R134a | R404A | R507 | R407C
R290 | R600a**



TABLE OF CONTENTS

P / T / X / D / N / F / S / G-Series

1. Secop hermetic reciprocating Compressors	3
1.1 Voltages and frequencies	4
1.2 Refrigerants	4
1.2.1 Handling of refrigerants	4
1.2.2 Charging with refrigerant	4
1.2.3 Replacement of refrigerant	4
1.2.4 Flammable refrigerants R290 and R600a	5
1.3 Connectors	5
1.4 HFC refrigerants (R134a)	6
1.5 Compressor designations	6
1.6 Design	6
1.7 Compressor dimensions	6
1.8 Type label	6
1.9 Date code & country of origin	8
1.10 Denomination	8
2. Application Range	10
3. Motors Breakdown Torque	12
4. Precondition for long operating Life	14
4.1 Motor overload	14
4.2 Thermal overload	14
5. Design Limits	15
5.1 Coil temperature	15
5.2 Condensing temperature	15
6. Electrical Equipment / Motor Systems	16
6.1 LST (RSIR)	16
6.2 LST (RSCR)	16
6.3 HST (CSR)	16
6.4 HST (CSIR)	17
6.5 Connections	17
6.6 Approvals	17
6.7 ePTC	18
6.8 Run capacitor holder	18
6.9 Survey of starting capacitors	19
6.10 Survey of run capacitors	19
6.11 Electronic units / Controllers (variable speed)	23
7. IP44 Equipment for SC Compressors	24
8. Twin Compressors	25
9. Moisture and Impurities	26
10. Condition at Delivery / Warnings	27
11. Max. Refrigerant Charge	28
12. Conversions	29
13. Mounting	30
13.1 Connector positions	30
14. Mounting Accessories	31
15. Shipment Position of Refrigeration Appliances	32

KAPPA / DELTA

Secop hermetic reciprocating Compressors made in Austria

General Product Documentation KAPPA	35
1. Compressor denomination / Label	36
2. Motor types / Approvals	37
3. Delivery conditions / Applications conditions	38
4. Drawings	39
5. Transport, packing, palletization	42
Accessories KAPPA	44
1. Electrical components	45
2. Electric terminal circuit diagram / Mounting accessories	46
3. Evaporation tray	47

General Product Documentation DELTA	48
1. Compressor denomination / Label	49
2. Motor types / Approvals / Delivery conditions	50
3. Drawings	51
4. Transport, packing, palletization	54
5. Electrical components / Electric terminal circuit diagram	56
6. Accessories	57
7. Brazing and refrigerant charge	59

Compressors Catalogue 220-240 V	60
R134a · 220-240 V · 50 Hz	60
R600a · 220-240 V · 50 Hz	78
R404A/R507 · 220-240 V · 50 Hz	98
R290 · 220-240 V · 50 Hz	112
R407C · 220-240 V · 50 Hz	122
R134a · 220-240 V · 60 Hz	126
R404A/R507 · 220-240 V · 60 Hz	136

Compressors Catalogue 115 V	144
R134a · 115 V · 60 Hz	144
R600a · 115 V · 60 Hz	156
R404A/R507 · 115 V · 60 Hz	160
R290 · 115 V · 60 Hz	168

1. SECOP HERMETIC RECIPROCATING COMPRESSORS

The Secop range of hermetic reciprocating AC compressors packs a mighty punch in a small package. Compact design, efficient motors and low energy consumption are the main features in hermetic compressors that build on over 50 years of reliability and quality.

This catalogue contains information on Secop hermetic refrigeration compressors for fixed voltages ranging from 115 V to 240 V.

The Secop hermetic refrigeration compressor programme consists of the types P / T / X / D / N / F / S and G-Series compressors and designed for household or light commercial applications. All of the compressor types are designed for refrigeration systems using the designated refrigerants listed below.



Refrigerant	R134a (typelabel stripe colour: blue), chemical formula: CH ₂ FCF ₃	typelabel colour
Voltages & Frequencies	220-240 V, 50 & 60 Hz	yellow
	115 V, 60 Hz	green
Basic types	220- 240 V: PL, TL, TF, NL, NF, FR, SC, SC Twin 115 V: PL, TF, TL, TT, NF, NL, NT, FF, SC	

Refrigerant	R404A/R507 (typelabel stripe colour: lilac), chemical formula R404A: CHF ₂ CF ₃ / CH ₃ CF ₃ / CH ₂ FCF ₃ chemical formula R507: CHF ₂ CF ₃ / CH ₃ CF ₃	typelabel colour
Voltages & Frequencies	220-240 V, 50 & 60 Hz	yellow
	115 V, 60 Hz	green
Basic types	220- 240 V: PL, TL, TF, NL, NF, FR, SC, SC Twin 115 V: PL, TF, TL, TT, NF, NL, NT, FF, SC	

Refrigerant	R407C (typelabel stripe colour: lilac), chemical formula: CH ₂ F ₂ / CHF ₂ CF ₃ / CH ₂ FCF ₃	typelabel colour
Voltage & Frequency	220-240 V, 50 Hz	yellow
Basic types	SC, SC Twin	

Refrigerant	R290 (typelabel stripe colour: red), chemical formula: C ₃ H ₈	typelabel colour
Voltages & Frequencies	220-240 V, 50 & 60 Hz	yellow
	115 V, 60 Hz	green
Basic types	TL, DL, NL, SC	

Refrigerant	R600a (typelabel stripe colour: red), chemical formula: C ₄ H ₁₀	typelabel colour
Voltages & Frequencies	220-240 V, 50 & 60 Hz	yellow
	115 V, 60 Hz	green
Basic types	PL, TL, XV, DL, NL	

Note: Direct current compressors and most variable speed compressors (except NLV and BD150F) have a grey label.

1.1 Voltages and frequencies

Secop AC refrigeration compressors are designed for the main voltage 220 V 50 Hz and 115 V 60 Hz. The compressors can also be used at other voltages and frequencies. Thus 220 V compressors can also be used on 240 V 50 Hz mains as the higher voltage tends to amplify the motor capacity. Some compressors can be used on 60 Hz mains, for instance 220 V 60 Hz and 230 V 60 Hz, however dependent on the application, the compressor, and the type. The rated voltages 100 V 50 Hz, 120 V 60 Hz, 127 V 60 Hz, 110 V 50 Hz and 127 V 50 Hz will strengthen the motors. The rated voltages 110 V 60 Hz and 100 V 60 Hz will weaken the motors. If used at 50 Hz the motors will be strengthened but the compressor capacity will be reduced by approx. 17%.

1.2 Refrigerants

In accordance with the Montreal Protocol the use of CFC refrigerants (chloro-fluoro-carbons) has been discontinued. This also includes refrigerants such as R12 and R502. Within the foreseeable future HCFC refrigerants (partly halogenated chloro-fluoro-carbons) can no longer be used in Europe. In order to observe time limits for abandoning HCFC refrigerants, various refrigerants were developed to replace the old ones.

All new refrigeration units must operate with the remaining refrigerants, i.e. PFC (perfluorocarbons), HFC (hydrofluoro-carbons), hydrocarbons or inorganic refrigerants.

In the case of HFC refrigerant R134a a long-term replacement for the ozone-depleting R12 has been found. R134a has approximately the same thermodynamic properties as R12, which simplifies the conversion of installations. Secop can offer a wide range of compressors designed for R134a refrigeration units.

Hydrocarbons are an ecofriendly alternative to the CFC/HCFC/HFC fluorocarbons linked to ozone damage. Isobutane (R600a) is the hydrocarbon most frequently found in domestic fridges and freezers, whilst propane (R290) is common in commercial heat pump-, air conditioning-, refrigeration- and freezer applications.

Until recently, the CFC refrigerant R502 was used in commercial refrigeration. There are some HFC-mixtures which will – in the long run – replace R502. Among these mixtures are R404A and R507. Instead of the HCFC refrigerant R22, R404A and R507 can also be used in commercial applications. CL and DL compressors are designed for use in refrigeration systems working with R404A and R507.

1.2.1 Handling of refrigerants

To ensure reasonable refrigeration system life, the refrigerant must have a maximum moisture content of 20 ppm (20 mg/kg). Do not fill the refrigerant from a large container into a filling bottle through several container sizes, as with every drawing-off the water content in the refrigerant is increased considerably.

1.2.2. Charging with refrigerant

Normally, charging with refrigerant is no problem with a suitable charge, provided that the charging amount of the refrigeration system equipment is known.

Always charge the refrigerant amount and type stated by the refrigerator manufacturer. In most cases this information is stated on the refrigerator type label. The different compressor brands contain different amounts of oil, so when converting to another brand it may be advisable to correct the amount of refrigerant. Charge of refrigerant can be made by weight or volume.

Flammable refrigerants like R600a and R290 must always be charged by weight. Charging by volume must be made with a refrigerant charging cylinder. The refrigerant R404A and all other refrigerants in the 400 series must always be charged as liquid.

If the charging amount is unknown, charging must be done gradually until the temperature distribution above the evaporator is correct. However, mostly it will be more appropriate to overcharge the system and then gradually draw off refrigerant until the correct charge has been obtained. The refrigerant charge must be made with the compressor running, the refrigerator without load and with the door closed.

The correct charge is characterized by the temperature being the same from the inlet to the outlet of the evaporator. At the compressor suction connector the temperature must be approx. ambient temperature. Thus transfer of moisture to the refrigerator insulation is avoided.

Systems with an expansion valve must be charged with refrigerant until there are no bubbles in the sight glass, which should be placed as close to the expansion valve as possible.

1.2.3. Replacement of refrigerant

The best solution for a repair is to select the same refrigerant as used in the same system. Secop compressors are supplied, or were supplied, in versions for the refrigerant R12, R22, R502, R134a, R404A/R507/R407C and for the flammable refrigerants R290 and R600a. The refrigerants R12 and R502, which are covered by the regulations in the Montreal Protocol, are only used in very few countries, and will eventually be phased out of production altogether.

For heat pump systems the refrigerant R407C is now used instead of R22 and R502. The more environmentally acceptable R134a has replaced R12, and the refrigerants R404A and R507 have replaced R22 and R502 in many applications.

**1.2.4
Flammable refrigerants
R290 and R600a**

R600a and R290 are hydrocarbons. These refrigerants are flammable and are only allowed for use in appliances which fulfil the requirements laid down in the latest revision of EN/IEC 60335-2-24. (To cover potential risk originated from the use of flammable refrigerants). Consequently, R600a and R290 are only allowed to be used in household appliances designed for this refrigerant and fulfil the above-mentioned standard. R600a and R290 are heavier than air and the concentration will always be highest at the floor. R600a must only be stored and transported in approved containers and must be handled according to existing guidelines.

Do not use open fire near the refrigerants R600a and R290. The refrigeration systems must be opened with a tube cutter.

The flammability limits are approx. as follows,

Refrigerant	R600a	R290
Lower limit	1.5% by vol. (38g/m ³)	2.1% by vol. (39 g/m ³)
Upper limit	8.5% by vol. (203 g/m ³)	9.5% by vol. (177 g/m ³)
Ignition temperature	460°C	470°C

In order to carry out service and repair on R600a and R290 systems the service personnel must be properly trained to be able to handle flammable refrigerants. This includes knowledge on tools, transportation of the compressor and refrigerant, and the relevant regulations and safety precautions when carrying out service and repair.

Do not use open fire when working with refrigerants R600a and R290!

Conversions from refrigerants R12 or R134a to R600a is not permitted, as the refrigerators are not approved for operation with flammable refrigerants, and the electrical safety has not been tested according to existing standards either. The same applies to conversions from refrigerants R22, R502 or R134a to R290.

Secop compressors for the flammable refrigerants R600a and R290 are equipped with a yellow warning label as shown.




**1.3
Connectors**

Most compressors are supplied with sealed connectors, which consist of a thick walled copper plated steel tube with great corrosion resistance and good solder ability. The connectors are welded in the compressor housing and thus the welding cannot be destroyed by overheating during soldering operations. The sealing is an aluminium cap which gives a tight sealing. The seal is easily removed with an ordinary pair of pliers or with the tool shown in the figure.

Compressor with copper connectors are sealed with rubber plugs.

Refer to chapter 13.1 for connector positions.

Oil cooler tubes are made of copper and the connectors are sealed with rubber plugs. 220 V compressors are normally supplied with millimetre tubes, while 115 V compressors are supplied with inch tubes. All connectors have a shoulder to provide optimal soldering conditions. Drifting of the connectors for more than 0.3 mm is not allowed. Compressors with an "S" in the model denomination and all NL/DL types have a direct intake system, which means increased capacity. The suction connectors at these compressors must be connected to the suction line to prevent capacity loss.

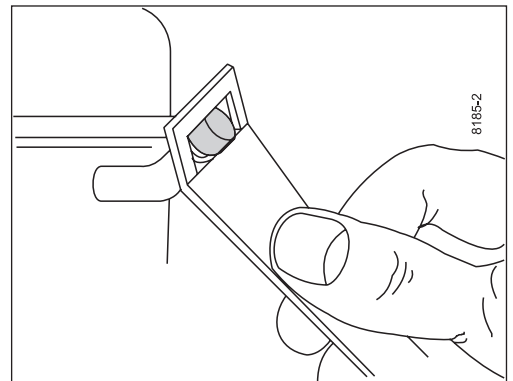

For the refrigerants R600a and R290, process tubes can be closed with a LokRing® connection. Soldering is not allowed on systems with flammable refrigerants.

1.4 HFC refrigerants (R134a)

The HFC refrigerant R134a and HFC mixtures require Polyester type oil. Contamination of components and systems with mineral oil and alkylbenzols must be avoided. Greasy substances and other long-chained, high molecular substances not dissolved must not be present. Manufacturing processes which require a lubricant can be done with Polyester oil approved for the compressors. Procedures for mounting, evacuation and charging must be carried out in such a way that contamination with chlorine refrigerants is avoided. HFC refrigeration systems must always have a drier with 3 Angstrom Molecular Sieves.

1.5 Compressor designations

The first letter (P, D, T, N, F, S or G) indicates the compressor series whereas the second indicates the motor protection placing. Nominal displacement is indicated by a number, which – for practical reasons - has been approximated to the actual displacement. Between the indicators for compressor series and displacement the identification marking for the optimization of the compressor is given.

The letter following the marking for nominal displacement indicates which refrigerant must be used as well as the field of application of the compressor. LBP (Low Back Pressure) indicates the range of low evaporating temperatures, MBP (Medium Back Pressure) the range of medium evaporating temperatures, and HBP (High Back Pressure) the range of evaporating temperatures. The extra "T" indicates a compressor intended for the tropics.

The final letter in the compressor marking provides information on starting torque. If, as standard, the compressor is intended for LST and HST, this place is left empty.

"K" also indicates low starting torque (Capillary tube, LST = Low Starting Torque) and "X" high starting torque (Expansion valve, HST = High Starting Torque)

1.6 Design

All Secop hermetic reciprocating compressors for R404A/R507 and R407C from the TL, TF, NL, FR and SC range are standard efficiency types. Furthermore, all compressors for R290 from the TL, NL and SC range are standard efficiency types as well. All compressors for R134a with the denominations PL, PLE, TLS, TFS, TLES, TTE, TLY, NL, NF and NLE are designs with semi direct intake. Compressors with the denomination NLY and TTY are designs with direct intake. Using the wrong suction connector on TTY and NLY is not allowed, as the compressor will not function. Using the wrong suction connector on PL, PLE, TLS, TTE, TFS, TLES, TLY, NL, NF and NLE compressors will lead to reduced capacity and efficiency.

All compressors for R600a are designed with semi direct intake. Using the wrong suction connector will lead to reduced capacity and efficiency. Please note that the suction and process connectors on all TLS, TFS, TLX, TTE, TLES, TTY and TLY compressors have been interchanged as compared with the basic TL compressors.

1.7 Compressor dimensions

The built in conditions (total height, weight, tube dimensions etc.) are specified in the individual datasheets including dimensioned sketches.

1.8 Type label

All compressors for 220-240 V have a yellow label with the type designation. Compressors for 115 V have a green label with the type designation.

Direct current compressors and most variable speed compressors have a grey label.

The label for "R404A R507" or "R404A R407C R507" has a lilac stripe. The label for "R134a" has a blue stripe. The labels for "R290" and "R600a" both have a red stripe.


The country of origin indicated on the compressor paper label and on the compressor varies depending on the manufacturing place (see 1.9)

Barcode format

The Secop typelabel contains two barcode lines. The first line is the full code number of the compressor and the second line is the compressor serial number. These barcodes contain 8 characters each and are printed in code 128.

Serial number

The compressor serial number will also be written in normal letters below the barcodes. The serial number contains 8 digits, written in characters 0...9 and A...Z, without I and O.

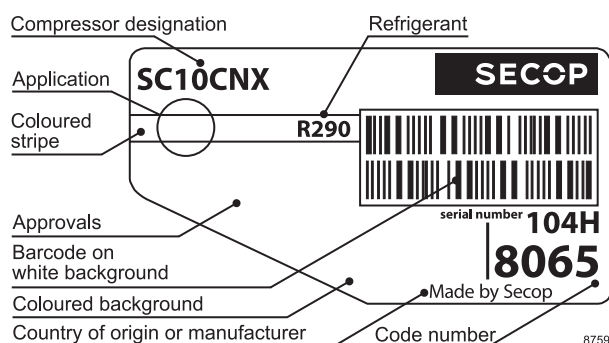

1.9 Date code & country of origin

Secop compressors have a manufacturing date code stamping on the housing.

The content of the coding (fig. 1) is 2 lines, with 6 and 7 characters each, according to the example below.

H4485C (6 characters)
051D11R (7 characters, 8 characters for BD Micro)

Composition on line 1

H4485: compressor type information
 (102H4485 = H4485)

C: internal Secop code

Composition of line 2

05: production week
1: production year
D: production day
 A= Monday, B = Tuesday, C= Wednesday, etc.
11: production hour 00 to 23 or shift code -1, -2, -3
R: Secop compressors internal production location code

A to G, U	Germany	A until week 50/2005 D until week 35/2006 U until week 08/2010
K to N	Slovenia	K until week 39/2012 L until week 34/2011 M until week 02/2012 N until week 02/2012
A, D, R, U	Slovakia	A from week 01/2006 D from week 38/2006 L from week 45/2011 M from week 09/2012 R from week 01/2005 U from week 12/2010
S, R	Mexico	R up to week 27/2004
W to Z	China	

On BD Micro compressors (code number 109Z....), the production year is indicated by two digits, e.g. "11" for 2011 and a serial number behind the location code.

The country of origin (in capital letters) or the manufacturer will also be marked on the typelabel, examples:

MADE IN SLOVENIA

- for compressors made in Slovenia (Fig.2)

MADE IN SLOVAKIA

- for compressors made in Slovakia (Fig.3)

Made by Secop | optional label "Made in China"

- for compressors made in China (Fig.4)



Fig.1 Needle print coding on compressor housing and country of origin on type label

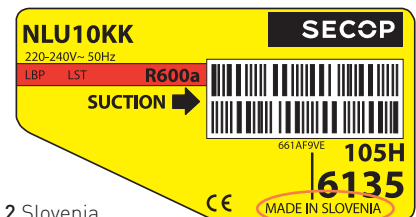


Fig.2 Slovenia

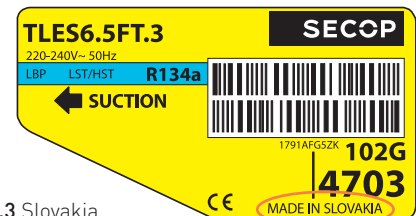


Fig.3 Slovakia

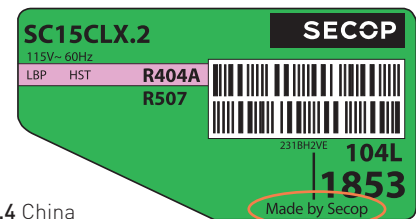


Fig.4 China

1.10
Denomination

Key to AC-Compressor Type Designation (P / D / T / N / F / S / G-Series)

1 Compressor design	2 Protector location					3 Optimization level						
	Internal		External			Standard → High						
	PTC LST	Relay HST	PTC	Relay	Variable speed							
P	L				Blank	Blank	E ^{a)}	Always semi-direct intake				
T							S					
D		T		F			LV	E ^{b)}	Semi-direct or direct intake	Y ^{a)b)}	X ^{a)}	
N												U ^{a)}
F	R											
S	C			C			E					
G	Power supply					Blank	Blank	Always semi-direct intake				
	1 phase		3 phase									
	S		T									

Blank = Standard

- E = Energy-optimized
- S = Semi-direct intake
- Y = High energy-optimized
- X = High energy-optimized
- U = High energy-optimized

Key to AC-Compressor Type Designation (X-Series)

1 Compressor design	2 Protector location					3 Optimization level				
	Internal		External			Standard → High				
	PTC LST	Relay HST	PTC	Relay	Variable speed					
X					V	Blank				

- 1 The first letter of the denomination (P, T, D, N, F, S, G or X) indicates compressor series
- 2 The second letter indicates motor protection placing. LV or V means variable speed compressors
- 3 E, Y, X and U mean different energy optimization steps. S means semi direct suction. On all these mentioned types the indicated suction connector has to be used. Using the wrong connector as suction connector will lead to reduced capacity and efficiency.
- 4 A number indicates the displacement in cm³, but for PL compressors the number indicates the nominal capacity.
- 5 The letter after the displacement indicates which refrigerant must be used as well as the field of application for the compressor.

4		5		6	7
Compressor size		Application range	Refrigerant	Code letter for starting characteristics	Generation
Capacity at rating point	Displacement				
20 30 35 50		C = LBP CL = LBP CM = LBP	R22 R404A/R507 R22		
	2.5, 3, 3.5, 4, 4.5, 4.8 5, 5.7, 6 6.5, 7, 7.5 8, 8.7, 9, 10	CN = LBP/MBP CNL = LBP D = HBP	R290 R290 R22	Blank → universal (principal rule)	Blank → first generation .1 → updated first generation
	4, 4.8 5.7, 6.5 7.5, 8.7 9.4, 10	DL = HBP F = LBP/(MBP) FT = LBP tropical	R404A/R507/R407C R134a R134a		
	5.2, 5.5 5.7, 6, 6.1 7, 7.3, 8.0 8.4, 8.8, 9 9.5, 10, 11 13, 15	G = LBP/MBP/HBP GH = Heat pumps GHH = Heat pumps optimized K = LBP/(MBP)	R134a R134a R134a R600a	K = LST characteristics (capillary tube)	.2 → second generation
	6 7.5 8.5 10 11	KT = LBP/(MBP) tropical MF = MBP MK = MBP	R600a R134a R600a		
	10 12 15 18 21	ML = MBP MN = MBP S = LBP/HBP (service)	R404A/R507 R290 R426A R401A/R401B R409A/R409B	X = HST characteristics (expansion valve)	.3 → third generation .4 → fourth generation
	18 21 26 34	ST = LBP tropical (service)	R426A R401A/R401B R409A/R409B		

- a) = Run capacitor compulsory
b) = Run capacitor optional

4		5		6	7
Compressor size		Application range	Refrigerant	Code letter for starting characteristics	Generation
Capacity at rating point	Displacement				
	5.0 7.2 8.0	K = LBP/(MBP)	R600a	X = LST & HST characteristics (capillary tube & expansion valve)	Blank → first generation

- 5 LBP (Low Back Pressure) indicates the range of low evaporating temperatures, typically -10°C down to -35°C or even -45°C, for use in freezers and refrigerators with freezer compartments. MBP (Medium Back Pressure) indicates the range of medium evaporating temperatures, typically -20°C up to 0°C, such as in cold cabinets, milk coolers, ice machines and water coolers. HBP (High Back Pressure) indicates high evaporating temperatures, typically -5°C up to +15°C, such as in dehumidifiers and some liquid coolers. T as extra character indicates a compressor intended for tropical application. This means high ambient temperatures and capability of working with more unstable power supply.
- 6 The next letter in the compressor denomination provides information on the starting torque. If, as principal rule, the compressor is intended for LST (Low Starting Torque) and HST (High Starting Torque), the place is left empty. The starting characteristics depend on the electrical equipment chosen. K indicates LST (capillary tube and pressure equalization during standstill) and X indicates HST (expansion valve or no pressure equalization). Exception: X-Series compressors.
- 7 The final letter (separated by a dot) mentions the generation of the compressor.

2.

APPLICATION RANGE

R290

CN

Compressors with denominations ending with CN are designed for low evaporating temperatures (LBP Low Back Pressure) and medium evaporating temperatures (MBP Medium Back Pressure) for use in commercial refrigerators, freezers, glass door merchandisers and similar applications in regions with normal supply voltage.

CNL

Compressors with denominations ending with CNL are designed for low evaporating temperatures (LBP Low Back Pressure) for use in commercial freezers and similar applications in regions with normal supply voltage.

MN

Compressors with denominations ending with MN are designed for medium evaporating temperatures (MBP Medium Back Pressure) for use in commercial refrigerators, freezers and similar applications in regions with normal supply voltage.

R404A/R507 and R407C

CL

Compressors with denominations ending with CL are primarily designed for low evaporating temperatures (LBP Low Back Pressure) for use in commercial refrigerators, freezers and similar applications in regions with normal supply voltage.

ML

Compressors with denominations ending with ML are primarily designed for medium evaporation temperatures (MBP Medium Back Pressure) for use in commercial refrigerators, bottle coolers, ice machines and similar applications.

DL

Compressors with denominations ending with DL are primarily designed for high evaporation temperatures (HBP High Back Pressure) for use in commercial refrigerators, liquid coolers, dehumidifiers, refrigerated display counters, vending machines, heat pumps and similar applications.

R600a

K

All compressors for R600a have denominations ending with K after the number for displacement or capacity. They are designed for low operating temperatures (LBP Low Back Pressure) for use in refrigerators, freezers and similar applications.

KK

Compressors with endings K and KK are designed for regions with stable supply voltage.

KTK

Compressors with endings KTK are designed for less stable supply voltage and tropical conditions.

MK

Compressors with endings MK are designed for medium operating temperatures (MBP Medium Back Pressure) for use in commercial refrigerators like bottle coolers.

Some of the smaller TLS-K, TLES-K, TLY-K and the PLE-K compressors are also released for medium operating temperatures (MBP Medium Back Pressure).

None of the compressors are released for high evaporation temperatures (HBP High Back Pressure).

R134a – 115 V
R134a – 220-240 V

F
Compressors with denominations ending with F are primarily designed for low evaporating temperatures (LBP Low Back Pressure/ MBP Medium Back Pressure on small displacements) for use in refrigerators, freezers and similar applications in regions with stable supply voltage.

FT
Compressors with denominations ending with FT are F-types designed for low evaporation temperatures (LBP Low Back Pressure) for use in refrigerators, freezers and similar applications operating in regions with unstable supply voltage.

FK
Compressors with denominations ending with FK are F-types designed for low evaporation temperatures with LST starting characteristics (capillary tube)

FX
Compressors with denominations ending with FX are F-types designed for low evaporation temperatures with HST starting characteristics.

G
Compressors with denominations ending with G are primarily designed for high evaporation temperatures (HBP High Back Pressure) for use in liquid coolers, dehumidifiers, refrigerated display counters, vending machines and similar applications. The compressors can also be used for 'Heavy Duty' purposes at low evaporating temperatures for use in refrigerators, freezers and similar applications operating in regions with unstable supply voltage.

R134a – 115 V

GK
Compressors with denominations ending with GK are G-types designed for high evaporating temperatures with LST starting characteristics (capillary tube).

GX
Compressors with denominations ending with GX are G-types designed for high evaporating temperatures with HST starting characteristics (expansion valve).

R134a – 220-240 V

GH
Compressors with denominations ending with GH are designed for high evaporating temperatures for cooling of electronic cabinets and for use in heat pump systems.

GHH
Compressors with denominations ending with GHH are optimized versions of GH compressors.

MF
Compressors with denominations ending with MF are primarily designed for medium evaporation temperatures (MBP Medium Back Pressure) for use in commercial refrigerators, bottle coolers, ice machines and similar applications.

3.

MOTORS BREAKDOWN TORQUE

The motor designation relates to the output at a load corresponding to half the breakdown torque. The concept "breakdown torque" expresses the highest load the motor is capable of handling without stopping. When testing a compressor in practice, motor breakdown torque should be sufficiently high to enable the motor to handle extreme conditions.

The load the compressor is capable of withstanding is illustrated by "breakdown curves" and the operating conditions the compressor is capable of withstanding are thus made clear. These curves are determined by maintaining a constant suction pressure (evaporating temperature) and subsequently allowing the compressor to work at an increasing back pressure on a constant voltage. If the load becomes too high, the number of revolutions will fall while current consumption increases and finally the compressor will stop. The figure illustrates the load limits for compressors TL - "F" and TL - "G" on various under voltages and the same motor temperature. In addition, the limit for TL - "G" at 60Hz has been included in the diagram.

The diagram also shows a typical example of the load fluctuations to which a compressor is subjected from start up to stationary operation in a refrigerant circuit with capillary tube throttling. The pressure sequence, determined by the start condition and system composition, is called "system characteristics". In this example the start condition is determined by the occurrence of pressure and temperature equalization in the refrigeration system at 43°C.

For a compressor to be able to handle the shown load sequence, it is a precondition that the breakdown curve at a specific voltage does not intersect the system curve.

It can be seen from the figure that the sequence of the breakdown curve for a TL - "G" at 60 Hz is more or less the same as the curve for a TL - "F" at 50Hz. In the example shown consideration should be given to the inclusion of a G compressor if refrigeration appliances designed for 230V 50Hz are to be connected to a 220V or 230V 60Hz mains supply. Furthermore, improved under voltage properties are obtained at the same frequency by the stronger motor of a G compressor, than is the case with a corresponding "F" compressor. This is the reason why "G" types are an excellent solution in fields with heavier under voltage, while the "F" type is used in household refrigeration and freezing appliances intended for countries with a more stable power supply.

Higher motor torque will be required for operation at high evaporating temperatures (HBP) than for operation at low evaporating temperatures (LBP). "G" compressors are suitable for this field and can thus be characterized as R134a universal compressors.

Energy - optimized compressors are characterized by a minimum in mechanical and electrical losses but high volumetric efficiency. With a view to achieving high motor efficiency, well defined application conditions, limited under voltage and a proper system curve should be taken into consideration when dimensioning the compressor. Here, the careful dimensioning of system components (condenser surface, condenser volume and capillary tubes) is necessary.

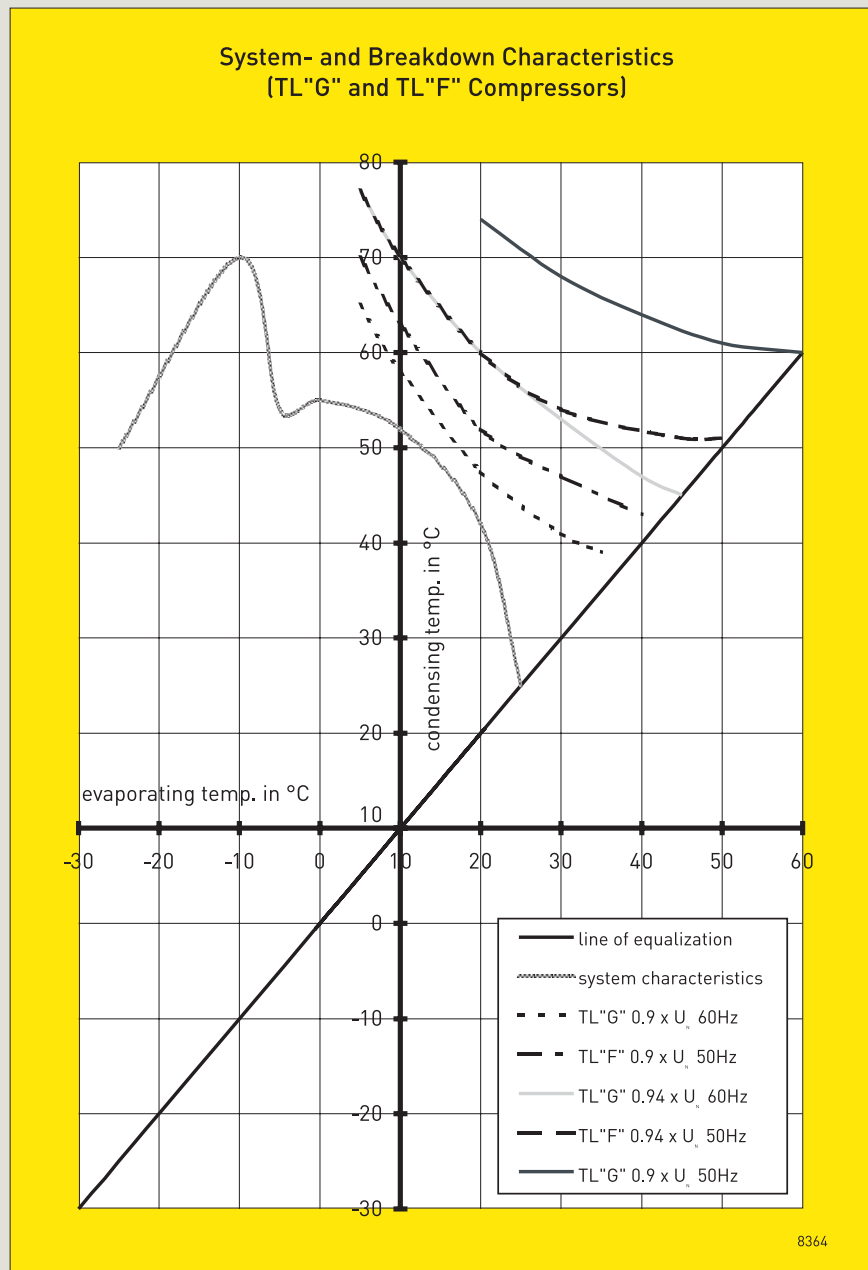


Fig. : Presentation of system and breakdown curves

Seen from this point of view, "F" compressors are a better solution in terms of energy consumption than the "G" types, and are intended for household refrigeration appliances. In all cases the precondition for trouble free operation is a stable supply voltage (min. 90% of line voltage) and suitable system dimensioning.

4.

PRECONDITION FOR LONG OPERATING LIFE

In order to achieve trouble free operation and long operating life for a hermetic compressor, the following preconditions should be observed:

1. Sufficient starting torque of the compressor motor to allow the motor to start at the pressure conditions in the refrigeration system.
2. Sufficient breakdown torque to allow the motor to handle the load conditions at start up and during operation.
3. When the refrigeration system is in operation, the temperature in the compressor should not rise to levels which could damage its components. Consequently, condensing and compression temperatures should be kept as low as possible.
4. Precise dimensioning of the refrigeration system in question and careful evaluation of the operating conditions of the compressor at expected maximum loads.
5. Sufficient cleanliness and low residual humidity in the circuit.

4.1 Motor overload

Compressor start up is influenced by the starting and/ or breakdown torque of the motor. If starting and/ or breakdown torque is insufficient, the compressor either cannot start or the start will be hampered and delayed because the motor protector is activated. Repeated start attempts subject the motor to overload, which sooner or later will result in failure. Faults of this kind can mostly be avoided by using the correct compressor/ motor combination. Secop offers the best solution for nearly all applications. It is a question of selecting the correct compressor for difficult fields of application.

4.2 Thermal overload

Operating conditions resulting in thermal decomposition of the materials used in the compressor must be avoided to ensure long compressor life. The materials relevant in this relation are motor insulation, refrigerant and oil.

The motor insulation consists of the insulating enamel for the copper wires, the slot liner of the stator iron, bandages and feeder cables.

As early as 1960, Secop (Danfoss Compressors) introduced fully synthetic insulation materials on all its compressors and the enamel for the wire insulation and the insulating system itself has improved continuously ever since. The result is constantly improved protection against motor overload. Like all other CFC gases, R12 and R502 were found to be harmful to the environment and were consequently prohibited. These refrigerants were used together with mineral oils. A so called Spauschus reaction between oil and refrigerant could consequently occur at high temperatures, which led to valve coking, especially at high residual humidity.

5.

DESIGN LIMITS

In order to secure a satisfying lifetime of the compressor, some design criteria for the appliances must be fulfilled. Both the condensing temperature and the compressor temperature should be kept as low as possible. This can be done by using well dimensioned condenser surfaces and by ensuring good ventilation around the compressor under all operating conditions.

In order to protect the compressor against overload, the compressor must start and work properly through pressure peaks obtained in the highest ambient temperature and lowest working voltage. These limitations ensure a protection of valves, gaskets, oil, and motor insulation. Refrigerants R134a, R404A or R507 used today need improved oils. They are only used in connection with special quality polyester oils.

Because of these new oil types and the application of the above mentioned refrigerants there is – in practice – no longer any danger of valve coking. Restrictions on condensing and motor temperatures are now set to protect the motor and thus increase its life.

For the application of Secop compressors in household and commercial refrigeration using the available refrigerants, we recommend the following rules to be observed:

5.1 Coil temperature

Coil temperature must not exceed 125°C during continuous operation.

For limited periods of time, e.g. during compressor start up or in the case of short load peaks, the temperature should not exceed 135°C.

For commercial refrigeration with R134a the same limits as for household refrigeration apply.

However, fan cooling of the compressor is recommended.

5.2 Condensing temperature

When using R600a or R134a the condensing temperature during continuous operation must not exceed 60°C. During limited load peaks the temperature must not exceed 70°C. In commercial refrigeration using R404A and R507 the condensing temperature limit is 48°C during continuous operation and 58°C in the case of load peaks. All CL and DL compressors are fan cooled.

6.

ELECTRICAL EQUIPMENT / MOTOR SYSTEMS

The compressors are equipped with a single phase AC motor. The electrical equipment of Secop AC compressor series P, T, D, N, F, S and G (electrics with relay, starting device, capacitor, cord relief and cover) is classified as "normal tight" (IP20). The motor protector is built into the motor (winding protector). Exceptions include compressors with the denominations TF/TT and NF/NT and some SCs. Earth connections are located on the bracket around the current lead in of the compressor.

No attempt must be made to start the compressor without a complete starting device.

R134a: With some exceptions these compressors are designed with universal motors which means that they can obtain a high (HST) or low starting torque (LST) depending on the external electrical equipment used.

R600: Nearly all compressors for R600a are designed only for use with Low Starting Torque (LST).

R290: All compressors for R290 are designed for use with Low Starting Torque (LST) or High Starting Torque (HST).

R404A/R507 and R407C: All compressors for R404A/R507 and R407C are designed only for use with High Starting Torque (HST).

6.1 LST (RSIR)

Compressors with the motor type Resistant Start Induction Run (RSIR) have a starting device for Low Starting Torque (LST). The design of the electrical equipment depends on the actual compressor design. The following designs of starting devices exist:

- a) PTC + cord relief + cover, the motor protector is built into the motor (winding protector),
- b) Relay housing incl. motor protector + cord relief + cover (alternative: terminal board with cord relief)

The PTC starting device requires pressure equalization before each start. This starting device is normally used in well designed refrigerating systems with capillary tube as throttling device. The PTC needs a compressor standstill period of 5 minutes to cool down before each start.

6.2 LST (RSCR)

Compressors with the motor type Resistant Start Capacitor Run (RSCR) have a starting device for Low Starting Torque (LST). This starting device consists of a PTC and a run capacitor. The PTC starting device requires pressure equalization before each start. This starting device is normally used in well designed refrigerating systems with capillary tube as throttling device. The PTC needs a compressor standstill period of 5 minutes to cool down before each start.

6.3 HST (CSR)

Compressors with the motor type Capacitor Start Run (CSR) have a starting device for High Starting Torque (HST). The following designs of starting devices exist:

- a) Relay + starting capacitor + run capacitor + terminal board + cord relief + cover
- b) Relay + starting capacitor (with bracket) + run capacitor + cover/ protector/ protector holder (parts of compressor), used for compressors which have an external protector.

The starting capacitor is designed for short time cut in. "1.7% ED", which is stamped on the starting capacitor, means for instance max. 10 cut ins per hour each with a duration of 6 seconds.

6.4 HST (CSIR)

Compressors with the motor type Capacitor Start Induction Run (CSIR) have a starting device for High Starting Torque (HST). This starting device consists of a starting relay and a starting capacitor. The following designs of starting devices exist:

- a) Relay + starting capacitor + cord relief + cover
- b) Relay housing including motor protector + starting capacitor + cord relief (2x)
- c) Relay + starting capacitor (with bracket) + cover/ protector/ protector holder (parts of the compressor), used for compressors which have an external protector.

The starting device requires no pressure equalization before each start and is normally used in refrigerating systems with expansion valve as throttling device or in capillary tube systems where pressure equalizing is not obtained during standstill periods.

The starting capacitor is designed for short time cut in. "1.7% ED", which is stamped on the starting capacitor, means for instance max. 10 cut ins per hour each with duration of 6 seconds (normally shorter than 1 sec).

6.5 Connections


The electrical equipment is equipped with connectors depending on the ordered code number,

Starting relays: 6.3 mm spade connectors only
PTCs: 6.3 or 4.8mm spade connectors and screws

The power supply must be connected as shown in the wiring diagrams for the chosen electrical equipment given in the actual datasheets.


6.6 Approvals

The compressors have been approved in respect of safety by testing authorities in the majority of Western European countries. Actual standards to which the compressors have been approved are specified in the individual data sheets. **Approval markings appear on the compressor type labels.**

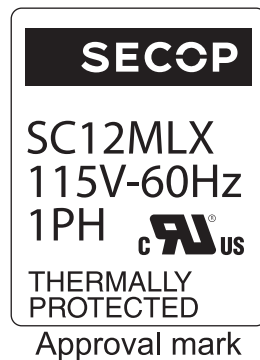

Most compressors which are capable of running at 60Hz have been approved in respect of safety by testing authority **UL**.
UL approval markings appear on a separate approval mark label.

Actual standards to which the compressors have been approved are specified in the individual data sheets.

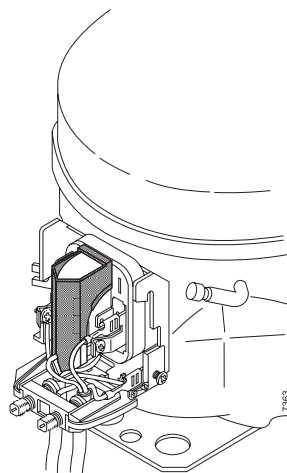

Note:
To fulfil the requirements of EN 60335-2-34 the protection screen 103N0476 must be applied to the PTC starting device.

**6.7
ePTC**

Introduction

The asynchronous motor of a single phase AC powered compressor has two windings, a main and an auxiliary winding. The auxiliary winding is powered high at start by means of a starting device, then powered down, often still utilized continuously by means of a run capacitor. The starting device of our standard PTC starters is a "Positive Temperature Coefficient" resistor, PTC. When heated up during the start phase, the PTC almost cuts off the current to the auxiliary winding, leaving only enough current to keep itself heated to this closing level. The associated heat loss amounts to approximately 2.5 W. With the ePTC this loss can be reduced down to approximately 0.4 W by an extra electronic circuit.

Features

The electronic design of the starting device offers some strong features such as:

- Compressor restart possible after a few seconds. Only a very short cooling time is necessary due to the electronic design.
- Operational wattage loss reduced by 2 watt
- PTC protection screen not needed (surface temp. < 82 °C)
- Temperature resistant up to min. +60 °C

Functional description

The main component of the ePTC is the same PTC pill like in other 220-240V 103N... Secop PTC starters. Thus the start of the compressor motor is performed in the same way. In standard PTC starters the >2 W energy loss to keep the PTC heated during compressor operation are not avoidable. In the ePTC a small electronic circuit cuts off the current through the PTC a short time after start and thus reduces the energy loss down to an approx 0.4W. The switch used is a Triac, an electronic AC switch, controlled by a timer circuit. As the timer circuit has a short reset time and the main PTC cools down during compressor operation, the full start torque will be available after approx 6 seconds compressor off time. However, if it is a LST starting device, full pressure equalization is needed before start.

Technical data

Electronically controlled PTC (version E-2) can alternatively be used for P/T/D/N/F/S - Series		
Code number	103N0050 (25 Ohm) 103N0055 (38 Ohm)	103N0058 (5 Ohm)
Nominal supply voltage	220 - 240 V, 50/60 Hz	115 V, 60 Hz
Minimal supply voltage	187 V	90 V
Maximal supply voltage	254 V	140 V
Power consumption	approx. 0.4 W (after 2 s)	approx. 0.5 W (after 2 s)
Spade connectors	4.8 mm	6.3 mm
Cables	temperature resistant up to min. +60 °C	
Run capacitor	optional	
Ambient temperatures	from 0 °C to 50 °C during operation from -20 °C to 70 °C during transport	
Enclosure	IP 00	
PTC protection screen	not needed (surface temp. < 82 °C)	

Connection & Terminals

The wiring diagram shows how to make the connections. The two screw terminals marked N and L are for supply voltage. The spade on the L terminal and the spade marked C are for the thermostat. The spade marked S at the top right position is internally connected to the start (or auxiliary) fuse terminal. This spade together with N is used for a run capacitor. The spade marked N at the top left position is internally connected to the neutral screw terminal. The spade marked C at the bottom position is internally connected to the common fuse terminal. On the rear side of the ePTC starter there are three holes. The hole in the bottom is for the common fuse terminal on the compressor. The top left hole is for the start fuse terminal and the top right hole is for the main fuse terminal. The ePTC starter is mounted with the C spade downwards.

EMC optimised ePTC versions ("E-2")


Starting second quarter 2012 Secop has shipped EMC optimised ePTC versions ("E-2"). An added "gate cap" filter on the PCB ensures improved Electromagnetic Compatibility (EMC). All other components remain unchanged.

**6.8
Run capacitor holder**

A run capacitor holder is available for the "Energy optimized" and "High Energy optimized" compressor range. This optional part is fixed to the run capacitor for 220V directly and earth connected on the compressor shell, concentrating all electrical accessories on the compressor. This will save space in the machine compartment. See drawing four mounting sequence.

Code numbers:


- run capacitor holder 117-0300
- screw M4 x 8 PZD 2 117-0301

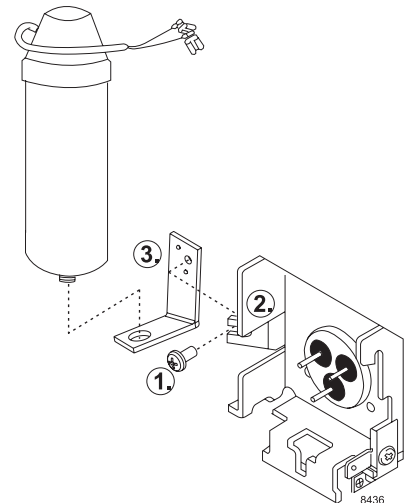

6.9
Survey of starting capacitors



Code No.	Capacity [μF]	Voltage [V]	Stamping IEC	Bleeder Resistor	Mount	Compressor Series	Approvals	Supplier L / D [mm]
117U5012	125	220	220V AB 1.7% ED 300V AB 0.1% ED	no	A	SC	VDE / CQC	KEMET / NGM 121/39 95/39
117U5014	60	220	220V AB 1.7% ED 300V AB 0.1% ED	no	A	PL, TL	VDE / CQC	KEMET / NGM 95/39
117U5015	80	220	220V AB 1.7% ED 300V AB 0.1% ED	no	A	FR, NL	VDE	KEMET / NGM 95/39
117U5017	80	220	220V AB 1.7% ED 300V AB 0.1% ED	no	A	SC	VDE / CQC	KEMET / NGM 95/39
117U5018	125	220	220V AB 1.7% ED 300V AB 0.1% ED	no	A	NF, NL	VDE / CQC	KEMET / NGM 121/39 95/39
117U5022	320	115	125V AB 1.7% ED 165V AB 0.1% ED	no	A	NF, TFS	CQC	KEMET / NGM 80/39
117U5023	240	115	125V AB 1.7% ED 165V AB 0.1% ED	no	A	TL, TLS, SC	CQC	KEMET / NGM 80/39
117U5025	280	115	125V AB 1.7% ED 165V AB 0.1% ED	no	A	FR, NF, TF, TFS	CQC	KEMET / NGM 80/39
117U5028	410	115	125V AB 1.7% ED 165V AB 0.1% ED	no	A	NF	CQC	KEMET / NGM 95/39
117U5035	125	115	125V AB 1.7% ED 165V AB 0.1% ED	yes	A	NL, TL	CQC	KEMET / NGM 95/39
117U5040	320	115	125V AB 1.7% ED 165V AB 0.1% ED	no	B	FF	CQC	KEMET / NGM 95/39
117U5041	280	115	125V AB 1.7% ED 165V AB 0.1% ED	no	B	FF	CQC	KEMET / NGM 95/39
117U5042	410	115	125V AB 1.7% ED 165V AB 0.1% ED	no	B	SC	CQC	KEMET / NGM 95/39
117U5043	410	115	125V AB 1.7% ED 165V AB 0.1% ED	yes ¹	B	SC	CQC	KEMET / NGM 95/39

Note:
¹ for use with run capacitor

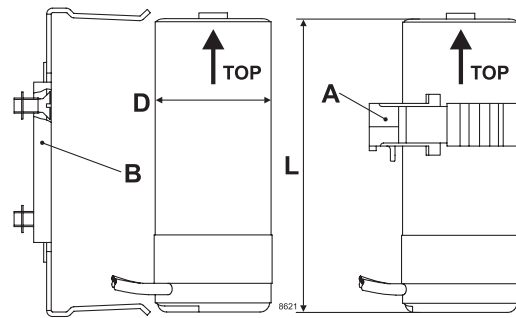


6.10
Survey of run capacitors

Code No.	Capacity [μF]	Voltage [V]	Frequency [Hz]	Connectors [mm] type	Compressor type	Approvals	Drawing
117-7111	5.0	430	50/60	6.3 F	SC	VDE	<p>S = spade connectors: straight F = spade connectors: flag</p> <p>D = ø 45 mm max. L = 110 mm max. A = 10 mm B = M8</p>
117-7112	10.0	430	50/60	6.3 F	SC	VDE	
117-7114	23.5	190	60	6.3 S	SC	UL	
117-7117	4.0	320	50/60	6.3 S	NL/TL	VDE	
117-7118	15.0	190	60	6.3 S	NL/TL	UL	
117-7119	4.0	320	50/60	4.8 S	NL/TL	VDE	
117-7120	15.0	190	60	4.8 S	NL	UL	
117-7121	10.0	430	60	6.3 F	SC	UL	
117-7123	4.0	320	50/60	4.8 S	NL/TL	VDE	
117-7126	12.0	190	60	6.3 S	NL	UL	
117-7127	15.0	430	60	6.3 F	SC	UL	
117-7129	5.0	320	50/60	4.8 S	NL	VDE	
117-7130	5.0	320	50/60	6.3 S	NL	VDE	
117-7131	3.0	320	50/60	6.3 S	NL/TL	VDE	
117-7132	3.0	320	50/60	4.8 S	NL/TL	VDE	
117-7133	23.5	190	60	6.3 F	SC	UL	
117-7134	15.0	450	50/60	6.3 F	GS	VDE	
117-7135	20.0	330	50/60	6.3 F	GS	VDE	
117-7136	2.0	320	50/60	4.8 S	NL/TL	VDE	
117-7137	15.0	430	60	6.3 F	SC	UL	
117-7138	20.0	330	60	6.3 F	GS	UL	
117-7139	2.5	320	50/60	4.8 S	NL/TL	VDE	
117-7140	3.5	320	50/60	4.8 S	NL/TL	VDE	

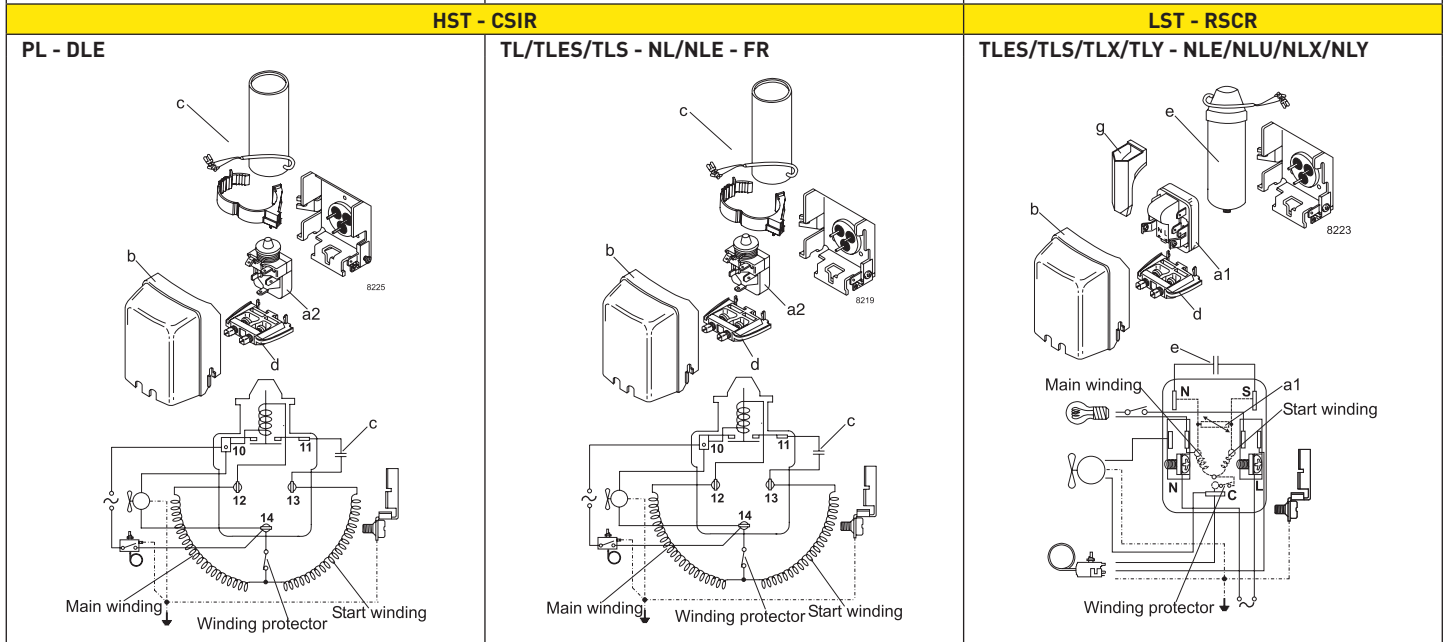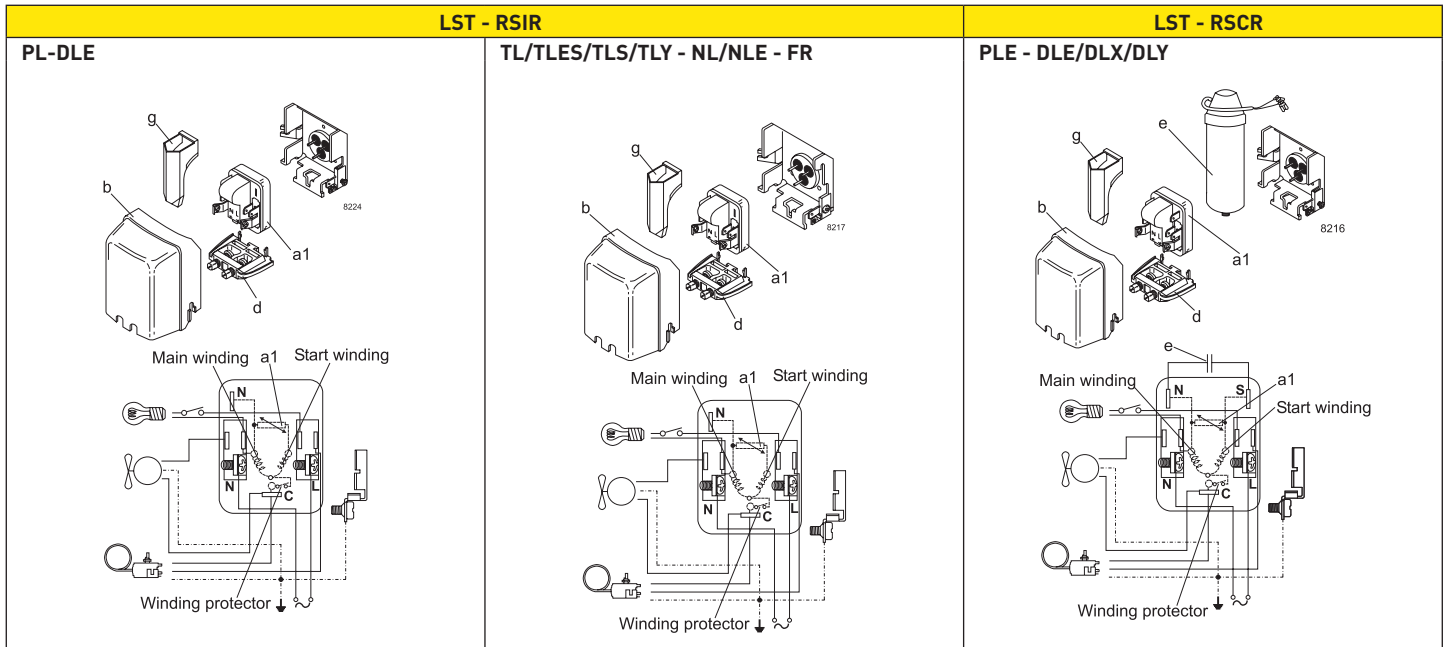


- Legend**
- a1:** PTC starting device
 - a2:** Starting relay
 - a3:** Starting device
 - b:** Cover
 - b1:** Clamp (part of compressor)
 - b2:** Gasket (part of compressor)
 - c:** Starting capacitor
 - d:** Cord relief
 - e:** Run capacitor
 - f:** Protector
 - g:** Protection screen for PTC
 - h:** Holder

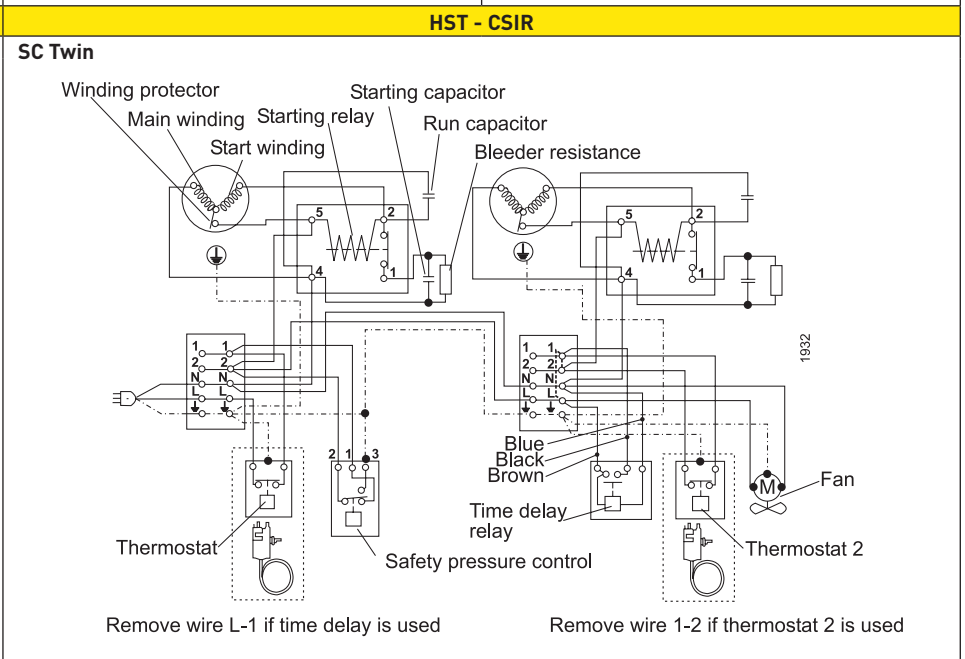


LST - RSIR


TF/TFS - NF - FF

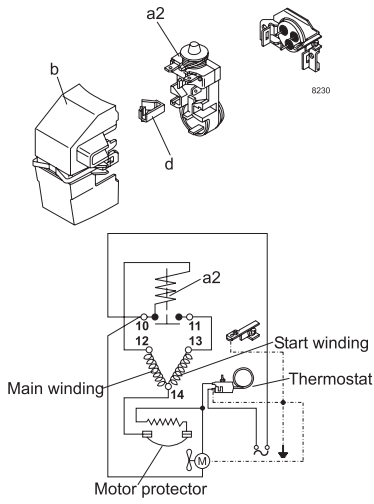

TT

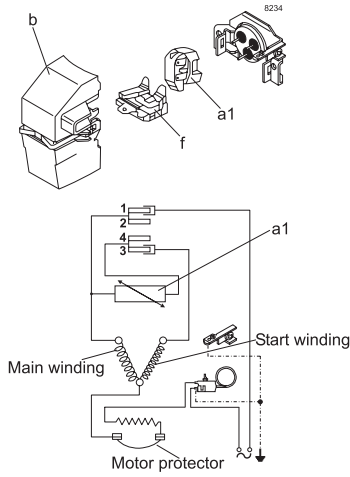


TF - NF - FF

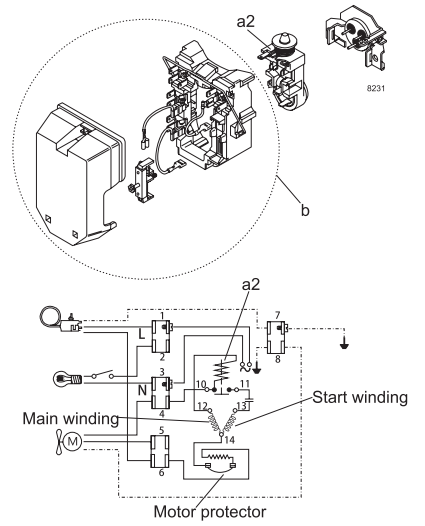


HST - CSIR


TFS - NF - FF

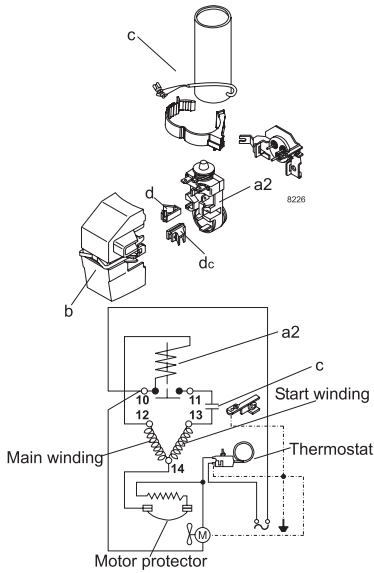

FF

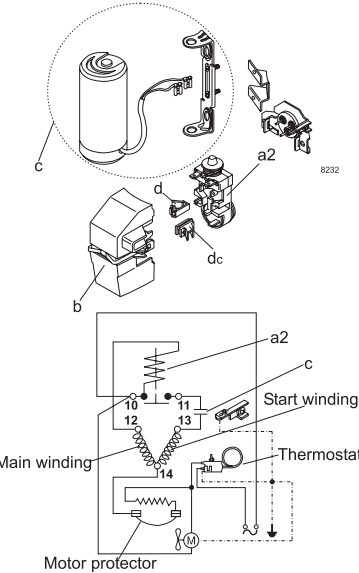


TF - NF - FF

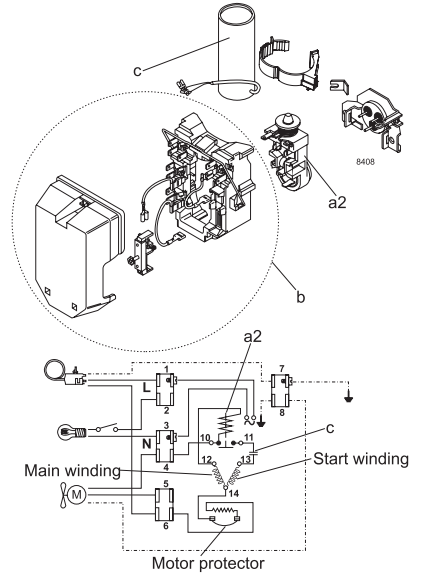


HST - CSR

SC Twin

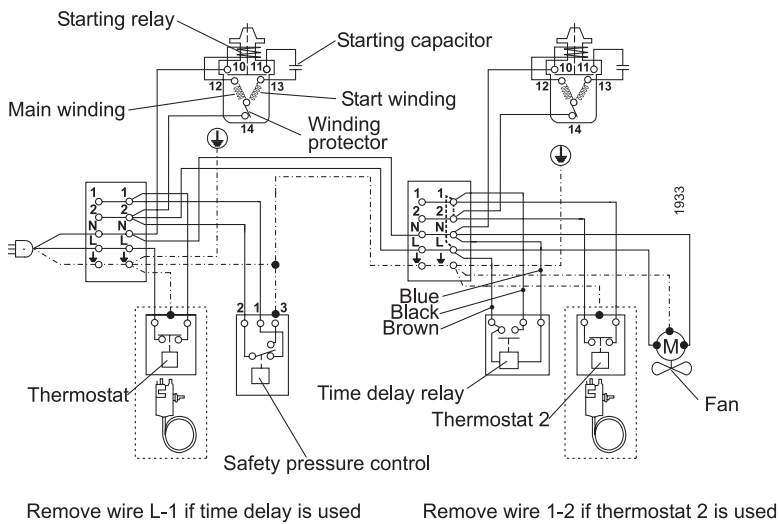


LST - RSCR

TTE/TTY - NTX/NTY

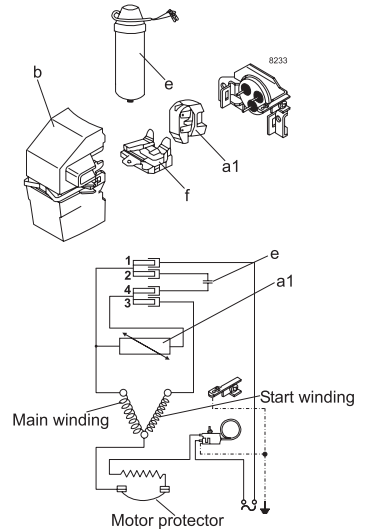


HST - CSR


SC

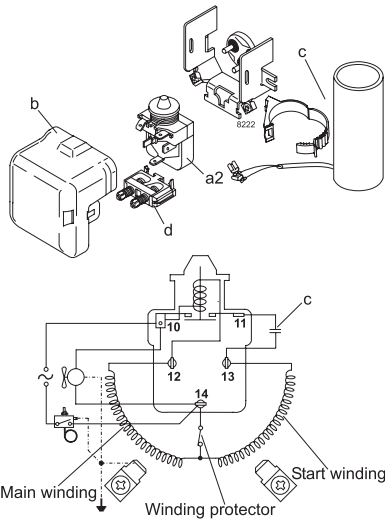

SC

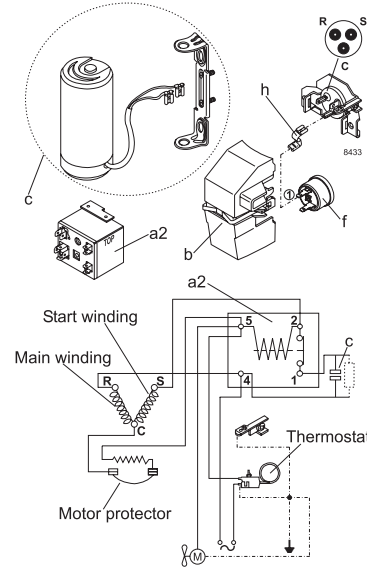


SC

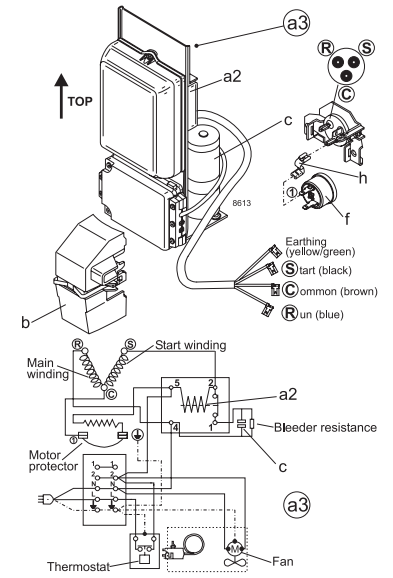


LST - RSIR

SC

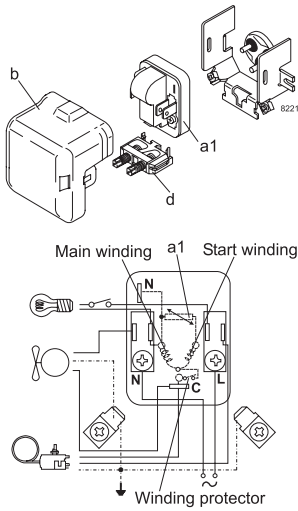


SC

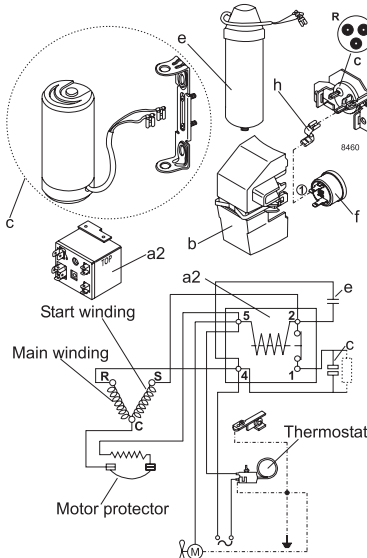


HST - CSR

SC

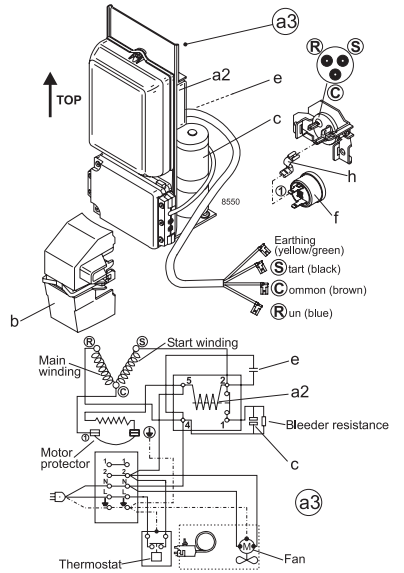


HST - CSR


SC

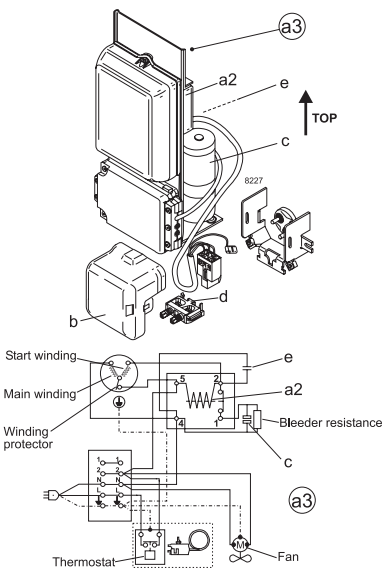


SC (kit)

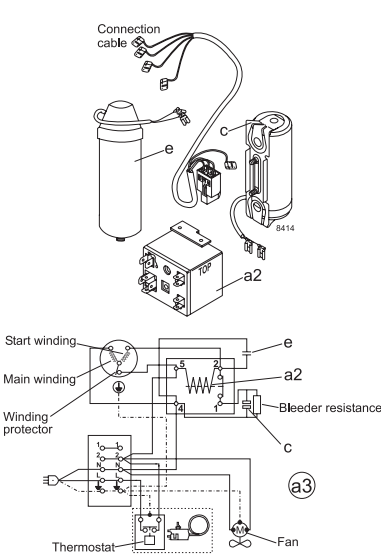


GS

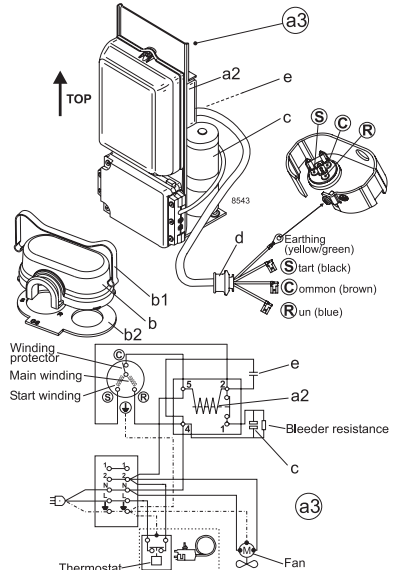

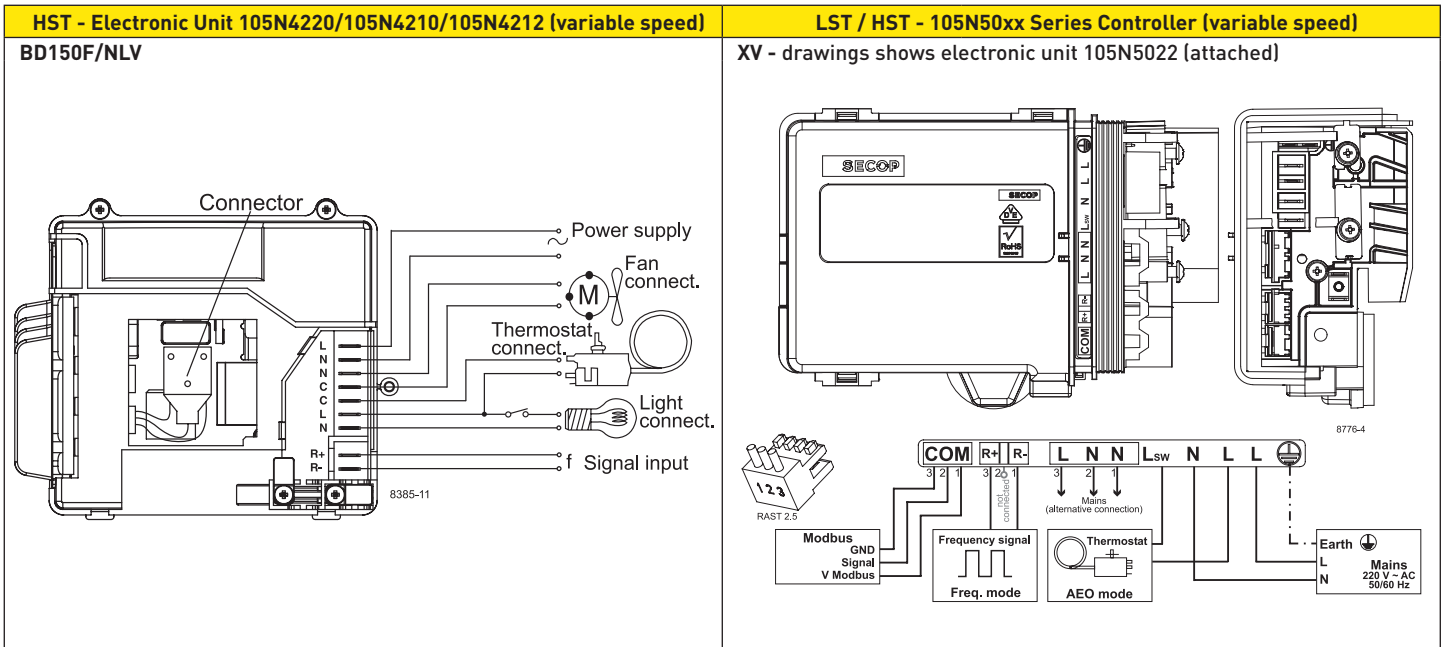

LST - 105N46xx Series Controller (variable speed)

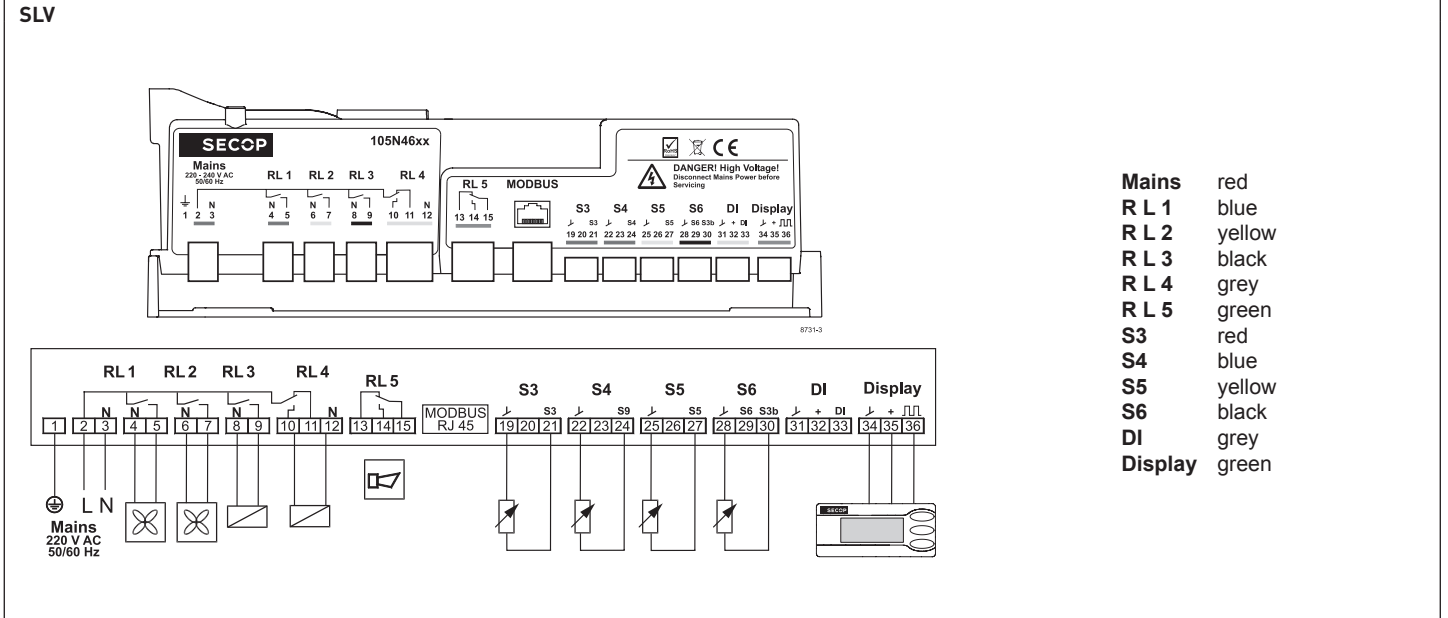

6.11 Electronic units / Controllers (variable speed)

Full load operation is extremely rare in most cooling applications, restricted to a few days per year. That is why Secop builds variable speed control into the BD/NLV/SLV and X-Series. This unique technology makes capacity automatically adapt to your actual requirement.

The compressor runs at low speed most of the time, minimizing energy consumption. On top of this, system efficiency is greatly improved thanks to reduced loss when less heat is transferred via the evaporator and condenser. Altogether, substantial energy savings can be obtained.

The variable speed compressor motors are electronically controlled. No attempt must be made to start the compressor without a complete electronic unit, as specified in the data sheet for the compressor type in question.

The electronic unit has a built-in overload protection as well as thermal protection. In case of activation of this protection the electronic unit will protect the compressor motor as well as itself. When the protection has been activated, the electronic unit automatically will restart the compressor after a certain time.

The electronic unit provides the compressor with **High Starting Torque (HST)** which means that a pressure-equalization of the system before start is not necessary.

The compressors are equipped with permanent magnet rotors (PM motor) and 3 identical stator windings. The electronic unit is mounted directly on the compressor and controls the PM motor.

Connecting the motor to AC mains, by fault, will damage the magnets and lead to drastically reduced efficiency, or even non functioning.

For further information on which starting device to use on individual compressors, please refer to the actual datasheets (some compressors have limitations for either LST or HST), and to our "Operating Instructions" and "Instructions".

For further information on the variable speed technology please refer to our Whitepaper "Advantages of adaptable Capacity".

7.

IP44 EQUIPMENT FOR SC COMPRESSORS

As the expansion of refrigeration and air conditioning technology into new application areas is ongoing, traditional applications face an increasing use worldwide.

Consequently, refrigeration equipment is more often operated under extreme conditions and hermetic compressors have to meet the resulting requirements.

One of these requirements is the adequate protection of the compressor and its outside electrical parts against moisture and water.

Secop now offers special accessories, which provide a better IP protection class for a major part of the SC compressor models.

All SC models for 220-240V/50Hz or 208-230V/60Hz with CSIR motor can be IP upgraded.

The equipment consists of one additional part, the so called "back cover", and an upgraded starting capacitor [Fig.1].

When using this equipment, the protection class is increased to IP44, i.e. the compressor and its electrical parts are splash-proof [Fig.2].

Code number	Description
103N2020	Back cover
117U5117*	IP44 starting capacitor 80µF

*replaces standard capacitor 117U5017

This equipment may be used with VDE approved compressors.

Starting capacitors with other capacities can be upgraded on demand.



Fig.1 Back cover 103N2020 + starting capacitor 117U5117



Fig.2 IP44 Equipment mounted on a SC compressor


8. TWIN COMPRESSORS

The twin version consists of two SC compressors mounted on a common base plate. The two compressors are joined by an oil-equalizing tube and also have an intake manifold with screw connector for a service valve or a solder connector (these parts are supplied as accessories, please refer to data sheets for more info).


Each twin compressor is supplied with two sets of electrical equipment and mounting accessories.

To ensure optimum starting characteristics and the smallest possible mains load we recommend that the compressors be equipped with a time delay relay for start of the second compressor. Twin compressors can operate with capacity regulation depending on the controls used.


Depending on the motor type (CSR/CSIR) all accessories needed are illustrated in the drawing below.

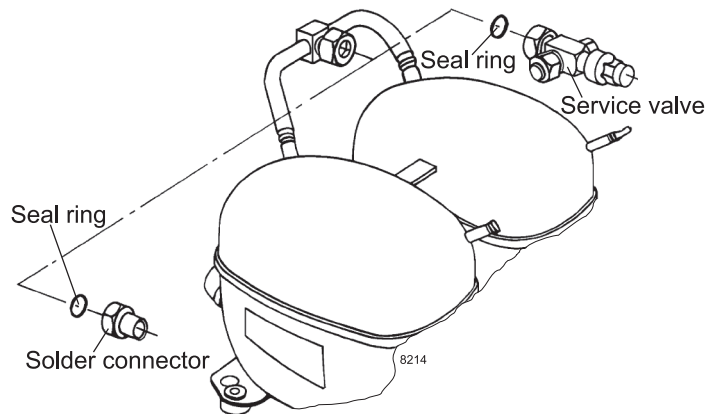

CSIR

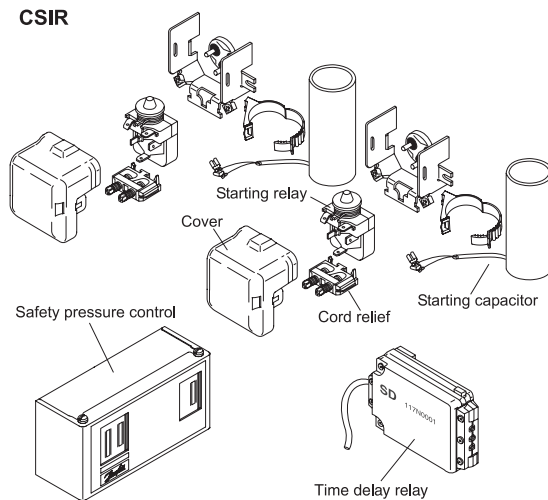

CSR

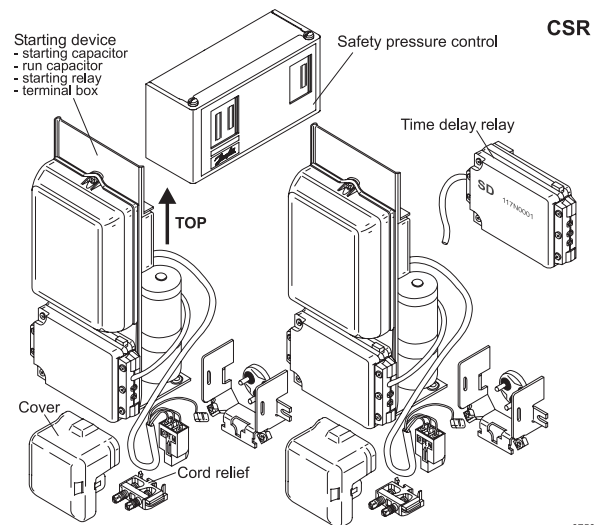

Accessories for SC Twin

SC10/10, SC12/12 and SC15/15:	
Service valve for 12 mm tube	118-7350
Solder connector for 12 mm tube	104B0584
SC18/18 and SC21/21:	
Service valve for 16mm tube	118-7351
Solder connector for 16mm tube	118-7405
SC10/10, SC12/12, SC15/15, SC18/18 and SC21/21:	
Seal ring for service valve and solder connector	118-3638
Time delay relay	117N0001
Check valve (to be used with time - delay relay)	020-1014

8758

MOISTURE AND IMPURITIES

The compressors are dried to a maximum moisture content of 60 to 75 mg depending on the compressor size. The maximum impurity content is 40 to 50 mg depending on the compressor size.

Secop compressors leave the factories with a moisture load less or equal 125 ppm. This ppm rate includes a safety factor for a storing time up to one year or longer. In addition of storing time and storing conditions the moisture level will increase. A level between 200 and 250 ppm in general is not critical and will not harm the compressors or systems, where the compressors will be implemented.

Measurement method

Test parameters	demand
Conditioning	24 h, room temperature
Condition of compressor	charged with oil
Measurement temperature	room temperature
Measurement time	1-2 min
Medium	dew point
Measurement cell	electrical hydrometer
Demand	max.125 ppm H ₂ O

With this measurement method, the total moisture in the air volume will be measured. The water, which is fixed in the plastic structure and the oil, will only be measured indirectly. Within 24 hours equilibrium between the humidity contents of the air and compressor parts is reached. The limit of 125 ppm is very low, if we consider that the surrounding air contains approx. 8000 ppm at 22°C and a relative humidity load of 40 %.

10.

CONDITION AT DELIVERY/ WARNINGS

The compressors are delivered without mounted starting devices on pallets. The standard pack can be stacked and is intended for transport by forklift truck. The bottom pallet has the dimensions 1144 x 800mm.

Quantities per pallets are specified in the individual data sheets.
Electrical equipment is packed in separate boxes.

The most important performance controls carried out during manufacturing are,

- A high potential insulation test with 1650V for 1 second
- Pumping capacity
- Tightness of discharge side and discharge valve
- Tightness of compressor housing
- Check of the right oil charge
- Noise test

The compressors are supplied with sealed connectors and the sealing should not be removed before the system assembly takes place. (max. 15 minutes with open connectors).

The compressors are supplied charged with dried and degassed oil, which is normally sufficient for the lifetime of the compressor. The refrigeration systems and the system components must be dimensioned in such a way that the oil can be lead back continuously to the compressor housing without accumulating in the system, e.g. without the oil pockets and with sufficient gas velocity. The compressors use polyolester or mineral oils and are approved only for these oils and **for the refrigerant to be used**. The oil charge is specified in the individual data sheets.

A high potential test with 1650V for 1 second is carried out on all compressors before delivery.
No high potential test or start tests must be carried out while the compressor is under vacuum. No attempt must be made to start the compressor without a complete starting device.

Allow the compressor to reach a temperature above 10°C before starting the first time in order to avoid starting problems.

Anti freeze agents must not be used in the compressors as such agents are damaging to several of the materials used. In particular, the ethyl or methyl alcohol contents of such anti freeze agents have a destructive effect on the synthetic motor insulation

11.

MAX. REFRIGERANT CHARGE

R404A/R507 and R407C R134a 115 V / 220-240 V

Only the refrigerant amount which is necessary for the system to function must be charged. The refrigerant amount may be critical, regarding oil foaming and liquid hammer after long standstill periods. Because of this, limitations of refrigerant charges have been introduced.

SC Twin: max. 2200g
 SC: max. 1300g
 FR, FF: max. 900g
 TL, TF, TT: max. 400g
 NL, NF, NT: max. 400g

If the permissible limit of refrigerant charge stated in the compressor data sheet is exceeded the oil will foam in the compressor after a cold start and may result in a damaged valve system in the compressor. The refrigerant charge must never exceed the amount that can be contained in the condenser side of the system.

If these limitations cannot be complied with, the risk may be reduced if a crankcase heater is properly used or if a pump down system is established.

Compressor type	Max. refrigerant charge			
	R134a	R600a	R290	R404A
P	300 g	120 g	-	-
T	400 g*	150 g	150 g	600 g
X	-	150 g	-	-
D	-	150 g	150 g	-
TL-G	600 g	-	-	-
N	400 g*	150 g	150 g	400 g
F	900 g	-	-	850 g
S	1300 g	-	150 g	1300 g
G	2000 g	-	-	2000 g
SC Twin	2200 g	-	-	2200 g

* Single types with higher limits available, see Data Sheets

Please refer to the compressor data sheets, as the maximum refrigerant charge may deviate on single types from the statements in the form. The maximum charge of 150g for R600a and R290 is an upper safety limit of the appliance standards, whereas the other weights are stated to avoid liquid hammer.

R290 / R600a

According to the European Standard EN 60335-2-24 or draft IEC 60335-2-89, which must be complied with, the refrigerant charge must not exceed 150g.

Commercially available R600a and R290 must not be used because the fuel grades of these products are of a variable composition. These products may also contain impurities which could significantly reduce the reliability and performance of the system and lead to premature failure. All Secop compressors for R600a and R290 are released for a base purity of 97% or better. Impurity limits shall comply with DIN 8960 of 1998 (extended version of ISO 916).

All users of refrigerant R600a should refer to the chemical data safety sheets for full information on the safe handling of R600a and R290.

In general the charge of R600a or R290 is approximately 40-50% by weight than that for HFC.

The refrigerant charge must never be too large to be contained on the condenser side of the refrigeration system. Only the refrigerant amount which is necessary for the system to function must be charged.

12.

CONVERSIONS

From R12 to alternative refrigerant

As long as new or recycled R12 refrigerant is available this should be used. It is impossible to provide R12 and illegal to use it. It should be thoroughly considered whether repair is worth while. It is hardly worth repairing old small refrigeration systems if it involves replacement of the compressor. Another consideration is use of an alternative refrigerant instead of R12.

From R12 to R134a

Normally, the capillary tube shall be adjusted at low evaporating temperatures. Compared to an optimized R12 system with the same evaporator capacity, the R134a system must have an increased resistance defined as approx. 10% less N² flow at 10 bar inlet pressure.

The same size of capillary tube as used for R12 can be used at high evaporating temperatures.

- A drier with 3A desiccant of molecular sieves must always be used.
- Rules for dryness and cleanliness of system components (DIN 8964) are transferred to R134a systems.
- The system components must not contain mineral oil or greasy substances.
- The compressors must be soldered into the system no later than 15 minutes after the connector seals have been removed.
- The same evacuation procedure as for R12 systems must be used.
- Max. 1% non – condensable gases.
- The system must not contain any chlorine.
- The charging equipment must only be used for R134a.
- If the same vacuum pump is to be used for R12 and R134a systems, special Ester oil must be used in agreement with the pump supplier.

From R502 / R22 or R404/R507 to R290

Normally, the same system components can be used as were used with R22. However, an adjustment of the charge must be made. Especially the system design must follow safety standards as EN/ IEC 60335-2-24 or IEC 60335-2-89, EN 378 or national standards.

- A drier with 3A desiccant of molecular sieves or a hardcore drier compatible with R290 must always be used.
- Rules for dryness and cleanliness of system components (DIN 8964) are transferred to R290 systems.
- The compressors must be soldered into the system no later than 15 minutes after the connector seals have been removed.
- The same evacuation procedure as for R22 / R502 / R404A systems must be used.
- Max. 1% non condensable gases.
- The system must not contain chlorine.

From R502 / R22 to R404A/R507 or R407C


Normally, the same system components can be used as were used with R502. However, an adjustment of the charge must be made.

- A drier with 3A desiccant of Molecular Sieves or a hard core drier compatible with R404A must always be used.
- Rules for dryness and cleanliness of system components (DIN 8964) are transferred to R404A systems.
- The system components must not contain mineral oil or greasy substances.
- The compressors must be soldered into the system no later than 15 minutes after the connector seals have been removed.
- The same evacuation procedure as for R502 / R22 systems must be used.
- Max. 1% non condensable gases.
- The system must not contain any chlorine.
- The charging equipment must only be used for R404A/R507 respectively R407C.

13. MOUNTING


Soldering problems caused by oil in the connectors can be avoided by placing the compressor on its base plate some time before soldering it into the system. The compressor must never be placed upside down when mounting the rubber grommets in the base plate. Instead place the compressor on its side with the connectors upwards. The system should be closed within 15 minutes to avoid moisture and dirt penetration.

Tightening torque for M6 bolt joint mountings should be $5 \text{ Nm} \pm 0,5$ [hand-tight].

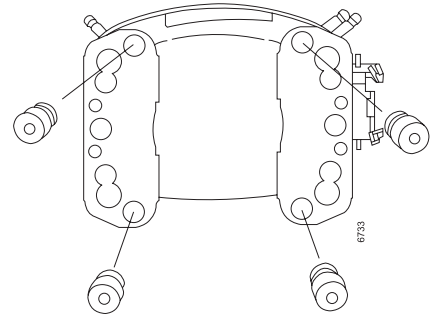

13.1 Connector positions

The positions of connectors are found in the sketches. **C** means suction and must always be connected to the suction line. **E** means discharge and must be connected to the discharge line. **D** means process and is used for processing the system.

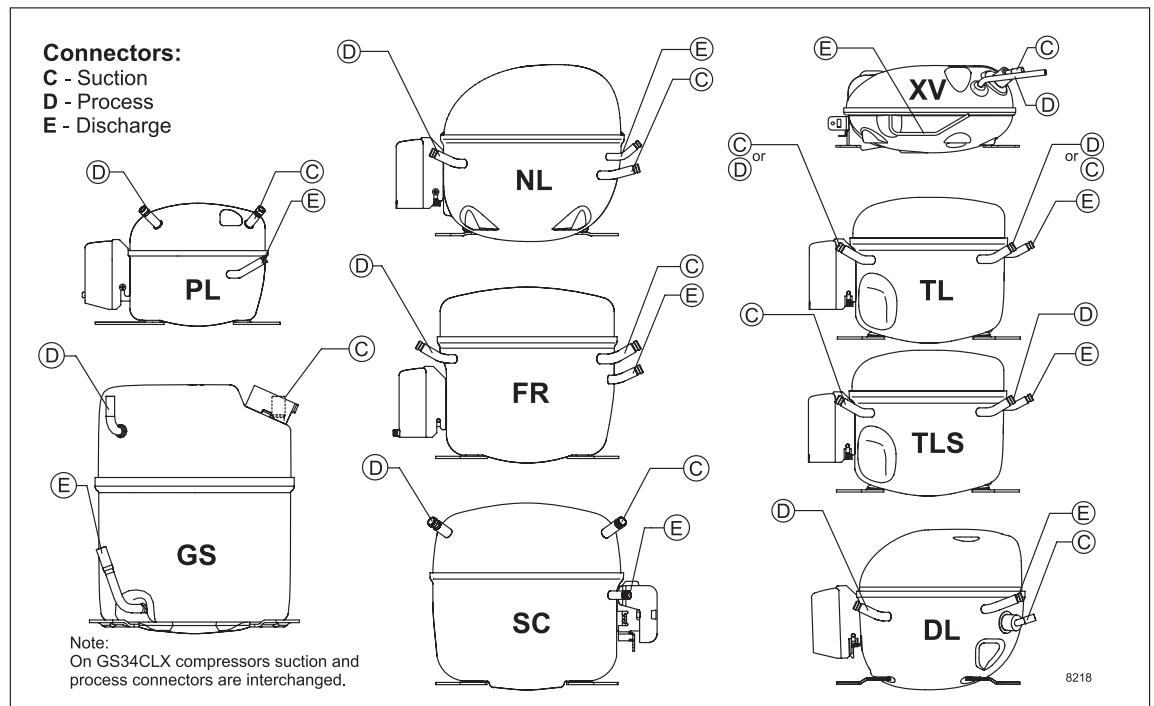

Most Secop compressors are equipped with tube connectors of thick-walled, copper-plated steel tube which have a solderability which comes up to that of conventional copper connectors. The connectors are welded into the compressor housing and weldings cannot be damaged by overheating during soldering.

These copper-plated steel connectors have an aluminium cap sealing which gives a tight sealing. The sealing secures that the compressors have not been opened after leaving Secop's production lines. In addition to that, the sealing makes a protecting charge of nitrogen superfluous.

Compressor with copper connectors and are sealed with rubber plugs. Oil cooler tubes are made of copper and the connectors are sealed with rubber plugs too.

14.

MOUNTING ACCESSORIES

Mounting	Code number	Bolt / pin dimension	Comp. base hole	Type of packaging	Compressor series	Parts list
Bolt joint	118-1917	M6 metric	16 mm	Single pack for one compressor	BD- / P- / T- / X- / D- / N- / F- / S-Series	I
Bolt joint	118-1918	M6 metric	16 mm	Industrial pack in any quantity	BD- / P- / T- / X- / D- / N- / F- / S-Series	I
Bolt joint	107B9150	M8 metric	19 mm	Single pack for one compressor	G-Series	II
Bolt joint	118-1946	1/4 inch	16 mm	Single pack for one compressor	BD- / P- / T- / X- / D- / N- / F- / S-Series	III
Bolt joint	118-1949	1/4 inch	19 mm	Single pack for one compressor	all with 19 mm base holes (except G-Series)	IV
Snap-on	118-1947	Ø 7.3 mm	16 mm	Single pack for one compressor	BD- / P- / T- / X- / D- / N- / F- / S-Series	V
Snap-on	118-1919	Ø 7.3 mm	16 mm	Industrial pack in any quantity	BD- / P- / T- / X- / D- / N- / F- / S-Series	V

Parts list [4 pcs. per compressor needed]			Symbol drawings
I	Sleeve Ø 8 mm x 6.4 mm x 0.8 mm	112-2052	<p>Washer, Nut, Sleeve, Compressor base, Cabinet base, Bolt, Rubber grommet</p> <p>3327-4</p>
	Washer Ø 20 mm x Ø 6.7 mm x 1 mm	112-2053	
	Bolt M6 x 25 mm	681X1130	
	Nut M6	118-3659	
	Rubber grommet 16 mm	118-3661	
II	Sleeve Ø 11 mm x 8.6 mm x 1.2 mm	107B9152	<p>Washer, Nut, Sleeve, Compressor base, Cabinet base, Bolt, Rubber grommet</p> <p>7382-4</p>
	Washer Ø 20 mm x Ø 8.8 mm x 1.2 mm	107B9155	
	Bolt M8 x 40 mm	107B9153	
	Nut M8	107B9154	
	Rubber grommet 19 mm	107B9151	
III	Sleeve Ø 8.3 mm x 6.7 mm x 0.8 mm	112-2088	<p>Washer, Nut, Sleeve, Compressor base, Cabinet base, Bolt, Rubber grommet</p> <p>7382-3</p>
	Washer Ø 20 mm x Ø 6.7 mm x 1 mm	112-2053	
	Bolt 1/4 x 1 inch, 20 UNC	119-3002	
	Nut 1/4 inch, 20 UNC	119-3031	
	Rubber grommet 16 mm	118-3661	
IV	Sleeve Ø 9.5 mm x 7.9 mm x 0.8 mm	112-2085	<p>Washer, Nut, Sleeve, Compressor base, Cabinet base, Bolt, Rubber grommet</p> <p>7382-3</p>
	Washer Ø 20 mm x Ø 6.7 mm x 1 mm	112-2053	
	Bolt 1/4 x 1 1/4 inch, 20 UNC	119-3002	
	Nut 1/4 inch, 20 UNC	119-3031	
	Rubber grommet 19 mm	118-3666	
V	Steel pin	118-3586	<p>Washer, Clip, Steel pin, Compressor base, Cabinet base, Rubber grommet</p> <p>7382-3</p>
	Washer Ø 21 x Ø 8.1 mm x 0.9 mm	118-3588	
	Clip	118-3585	
	Rubber Grommet 16 mm	118-3661	

14.

SHIPMENT POSITIONS OF REFRIGERATION APPLIANCES

Shipment of refrigeration appliances in horizontal position

When refrigeration appliances are shipped in the normal vertical position, this will normally not cause any damage to the compressor. If transported in horizontal position, the compressor must be oriented as shown in the table on the next page to prevent the accumulation of oil in the muffler and subsequent risk of damage. It is important to note that the compressor must be securely fastened and well supported during transportation.

Refrigeration appliances can be safely transported in horizontal position:

- with trucks on roads and motorways in good condition
- by ship in containers
- on railways in good condition

Compressors	Shipment positions of refrigeration appliances - Position X must not be used				
	Connectors up	Electrical lead-in up	Connectors down	Electrical lead-in down	Base plate up
X - Series					
D - Series					

Compressors	Shipment positions of refrigeration appliances - Position X must not be used				
	Connectors up	Electrical lead-in up	Connectors down	Electrical lead-in down	Base plate up
P - Series					
T - Series					
N - Series					
F - Series					
S - Series					
G - Series					

SECOP HERMETIC RECIPROCATING COMPRESSORS MADE IN AUSTRIA

Secop Austria GmbH was already established in 1982 as "Verdichter Oe" in Fürstenfeld, Austria. The production site has several years of experience in developing high performing compressor solutions, mainly for household refrigeration appliances. The highly advanced manufacturing technology allows to manufacture products with the highest quality and performance standards and offer reliable efficiency in all areas. The Know-How and expertise of the innovative research and development team along with the close cooperation with market leading customers results in product innovation that enhances customer values and standards.



Refrigerant	R600a (typelabel stripe colour: Red) Chemical formula: C ₂ H ₁₀	Typelabel colour
Voltage & frequency	220-240 V, 50Hz	Yellow
Basic types	KAPPA, DELTA	

GENERAL PRODUCT DOCUMENTATION

KAPPA


Table of Content

1	Compressor denomination / Label	36
2	Motor types / Approvals.....	37
2.1	Motor types	37
2.2	Certificate references	37
2.2.1	HXX	37
2.2.2	HKK.....	37
2.2.3	HTK	37
2.2.4	HMK	37
3	Delivery conditions / Application conditions	38
3.1	Delivery conditions	38
3.2	Application conditions	38
3.2.1	Oil transport of the compressor in the refrigeration circuit.....	38
4	Drawings	39
4.1	3D sketch, mechanical data sketch	39
4.2	Outline dimensions with short service tube	40
4.3	Outline dimensions with long service tube.....	41
5	Transport, packing, palletization.....	42
5.1	Recommended transport positions when fitted into appliances	42
5.2	Packaging and palletization	42
5.2.1	Packaging type, pallet data.....	42
5.2.2	Transport	42
5.2.3	Warehouse storing	43
5.2.4	Recycling of compressors.....	43

1.

COMPRESSOR DENOMINATION/ LABEL

1	2	3	4	5	group
H	X	K	12	AA	example

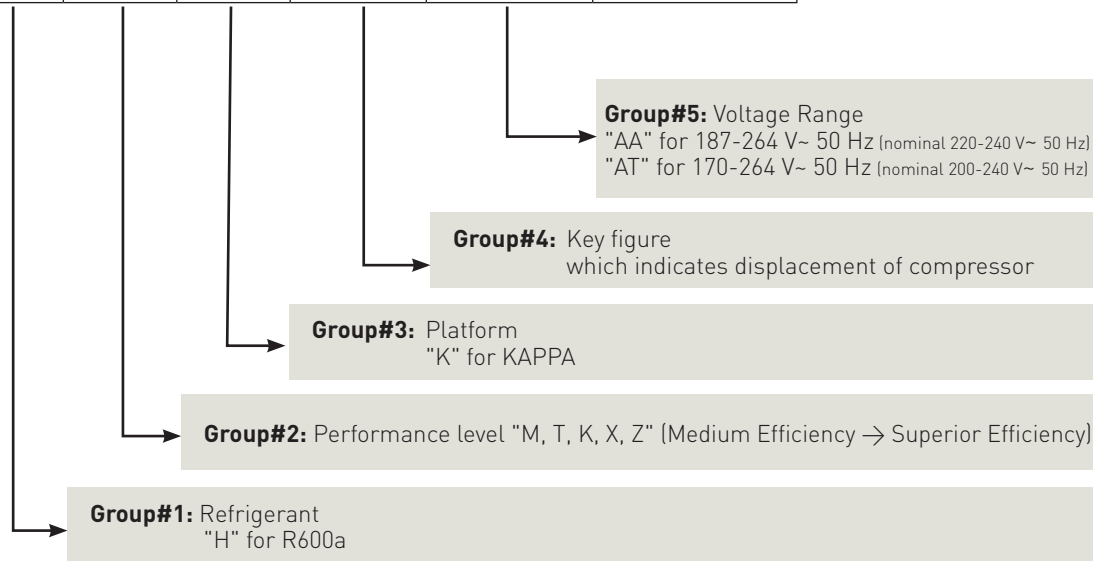


2.

MOTOR TYPES/ APPROVALS

2.1 Motor types

RSIR:	Resistance start – inductive run Start winding is interrupted after start-up by a PTC.
RSCR:	Resistance start – capacitive run For higher efficiency the auxiliary winding is supporting the main winding by a run capacitor.
RSIR/RSCR:	Depending on requirements motor can be used as RSIR or RSCR type.

2.2 Certificate references

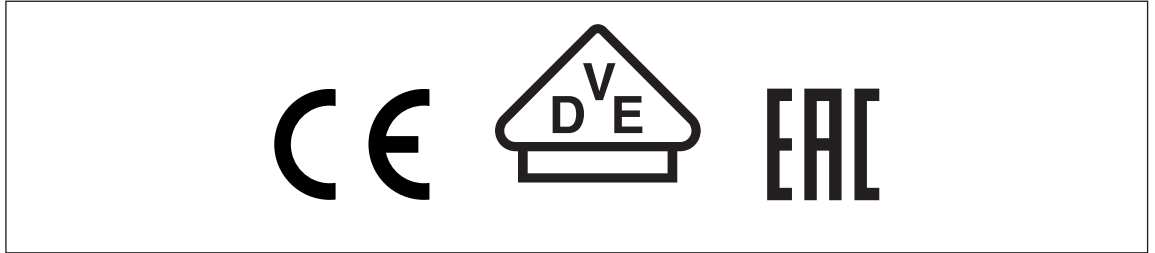

2.2.1 HXK

VDE, (CE)	EAC
Licence No.	Licence No.
40023933	TC RU D-AT.AG27.B.00381
	TC RU D-AT.AG27.B.00382
	TC RU D-AT.AG27.B.00383

2.2.2 HKK

VDE, (CE)	EAC
Licence No.	Licence No.
40010874	TC RU D-AT.AG27.B.00381
40031157	TC RU D-AT.AG27.B.00382
-	TC RU D-AT.AG27.B.00383

2.2.3 HTK

VDE, (CE)	EAC
Licence No.	Licence No.
40003038	TC RU D-AT.AG27.B.00381
	TC RU D-AT.AG27.B.00382

2.2.4 HMK

VDE, (CE)	EAC
Licence No.	Licence No.
40016826	TC RU D-AT.AG27.B.00381
	TC RU D-AT.AG27.B.00382

3.

DELIVERY CONDITIONS/ APPLICATION CONDITIONS

3.1 Delivery conditions

Max. solid impurities (*)	[mg]	30
Max. soluble impurities (*)	[mg]	600
Max. total compressor water content (*)	[mg]	100

(*) When delivered

3.2 Applications conditions

Max. ambient temp.¹	[°C]	43
Max. steady discharge temp.²	[°C]	120
Max. peak discharge temp.^{2, 5}	[°C]	135
Max. steady condensing temp.³	[°C]	60
Max. peak condensing temp.^{3, 5}	[°C]	70
Max. winding temp.⁴	[°C]	130

1 ... static

2 ... measured on discharge tube, 50 mm from the schell

3 ... measured in the middle of condenser

4 ... calculated out of the measured difference of resistance

5 ... max. 5% life time

3.2.1 Oil transport of the compressor in the refrigeration circuit

Average value of the transported oil in the refrigeration circuit:

2.5 g oil/kg R600a mass flow per hour.


Tolerance:

±2.5 g oil/kg R600a mass flow per hour.




4.

DRAWINGS



4.1
3D sketch, mechanical
data sketch

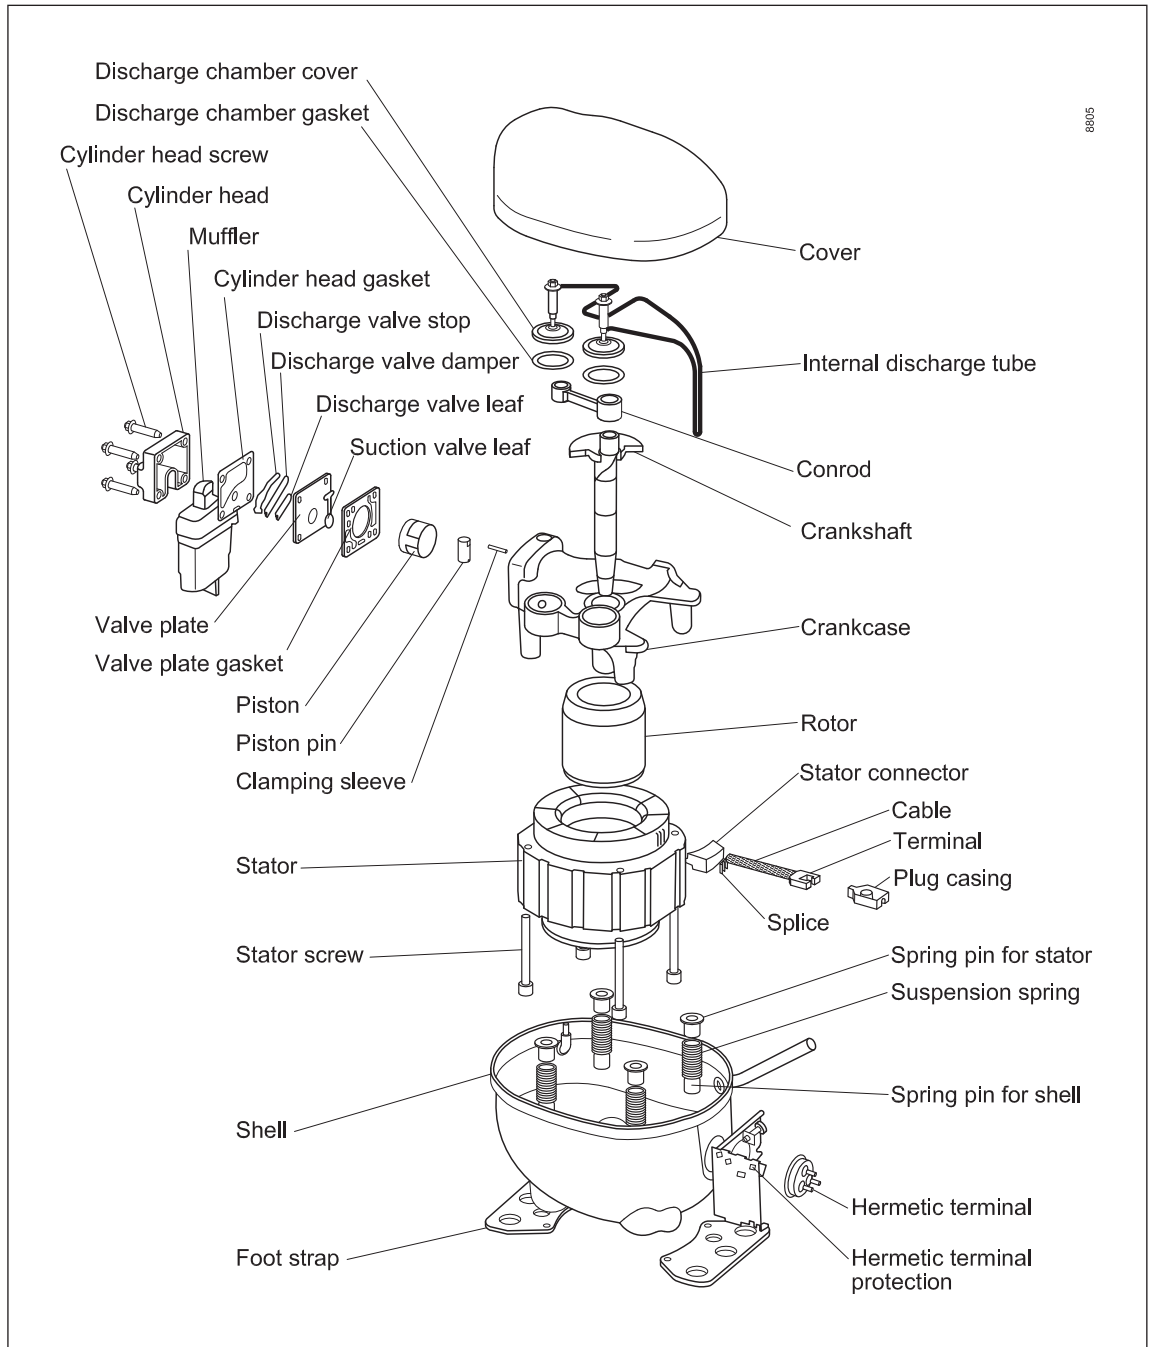

4.2
Outline dimensions with
short service tube

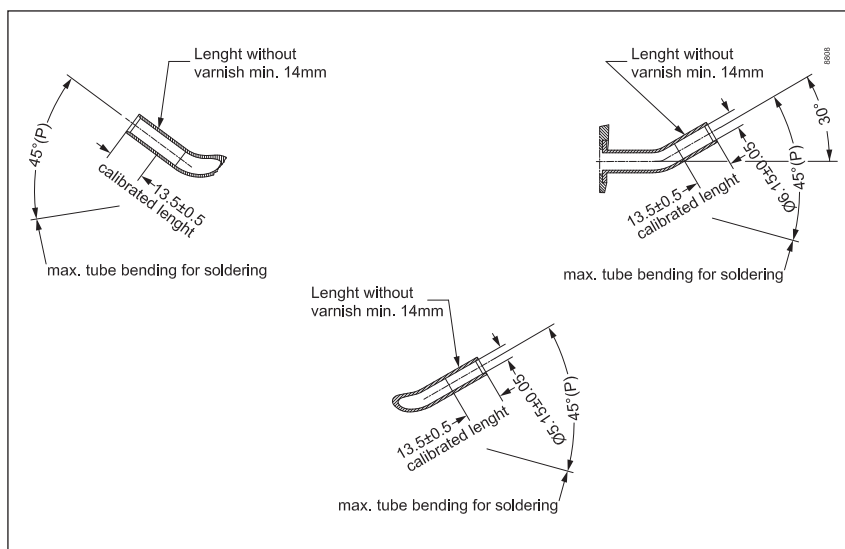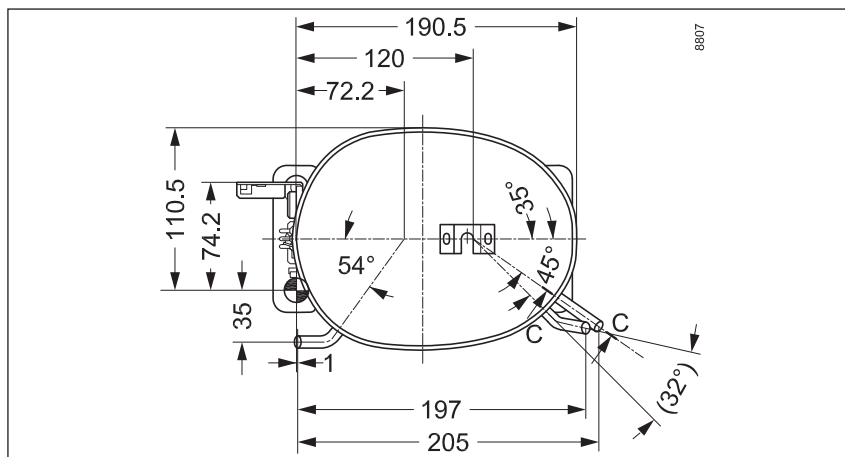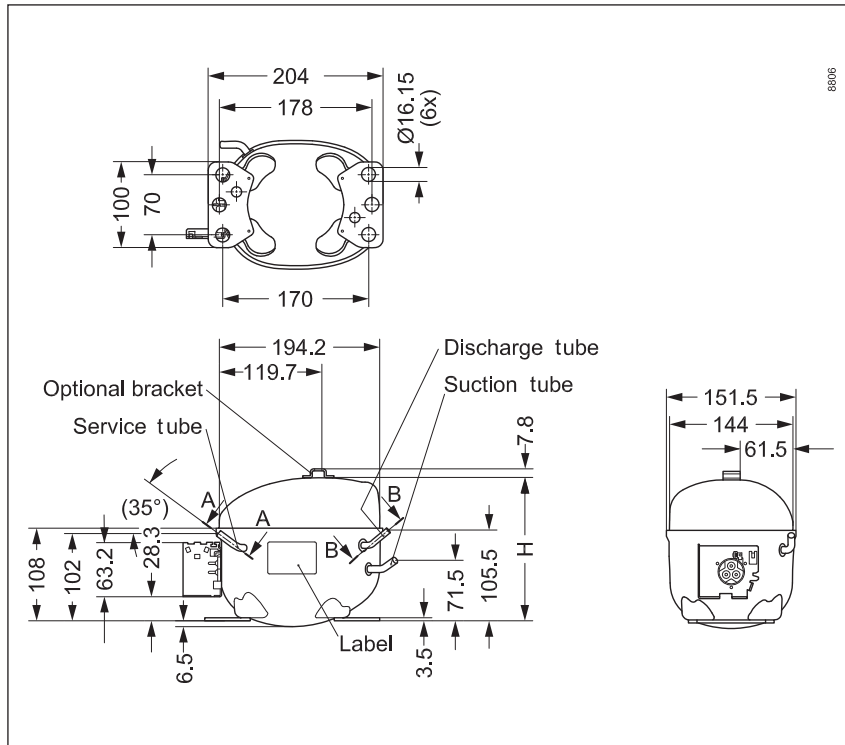


4.3
Outline dimensions with
long service tube

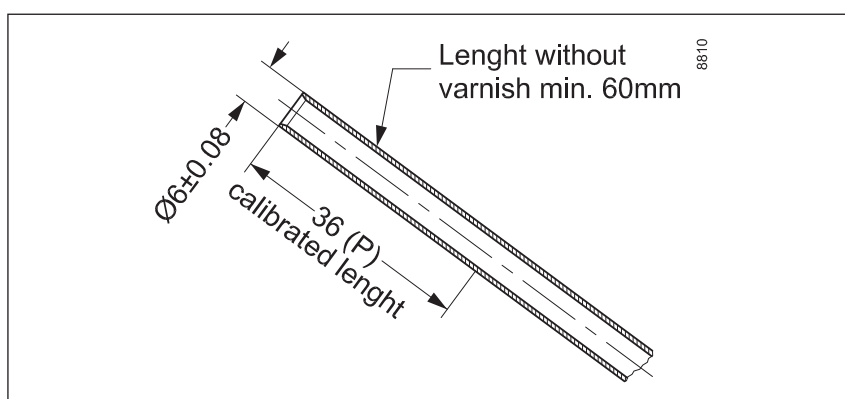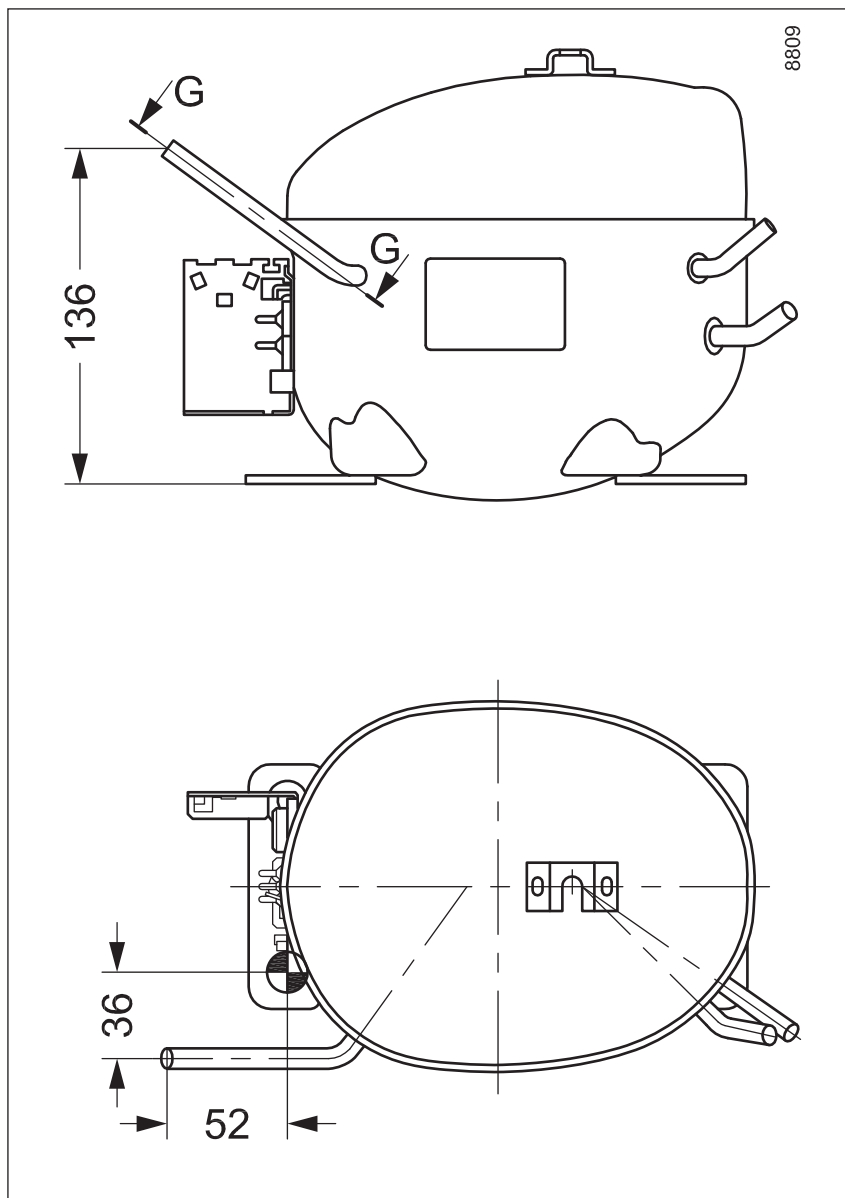

5. TRANSPORT, PACKING, PALLETIZATION

5.1 Recommended transport positions when fitted into appliances

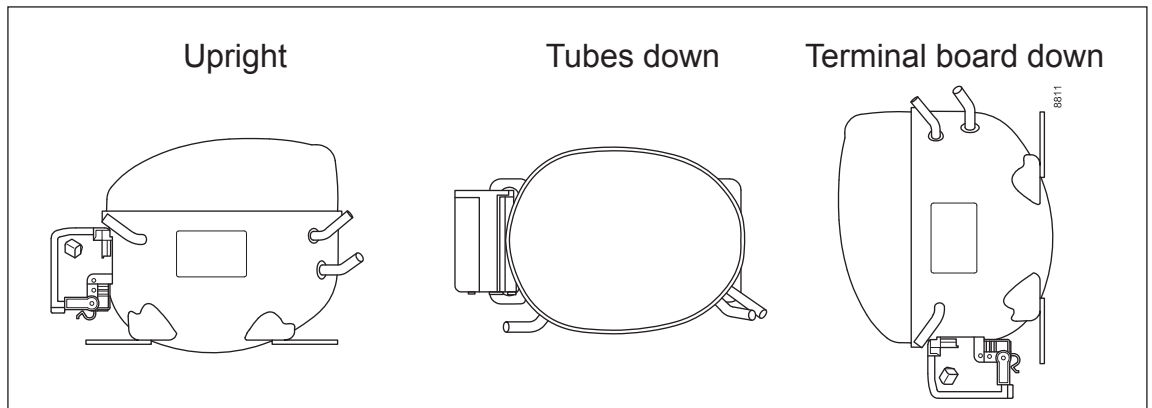

5.2 Packing and palletization

5.2.1 Packing type, pallet data

Packing-type		Layers	Quantity	Compressors per layer	Pallet Size L×W
				L×Q	mm
One-Way packaging	Wood-EPS *	4	80	5×4 = 20	1120×820
		5	100	5×4 = 20	1120×820
More-Way packaging	ABS	5	60	4×3 = 12	1120×820
		4	84	7×3 = 21	1200×800
		5	105	7×3 = 21	1200×800

*Optional protection and reinforcement with cardboard-box and PE top foil.


5.2.2 Transport

Packing-type		Layers	Stacking height Number of pallets		
			Truck	Container	Train 1, 2
One-Way packaging	Wood-EPS	4	1	-	-
		5	1	-	-
	Wood-EPS + cardboard-box	4	1	-	1
		5	1	-	1
	Wood-EPS + cardboard-box + PE top foil	4	1	2	1
		5	1	2	1
Single packaging	5	1	1	-	
	5	1	1	-	
More-way packaging	ABS	4	2	-	1
		5	1	-	1

- 1 Train transport according UIC-Codex 526-1. In sliding wall wagon with lockable bulkhead only;
- 2 Train loading according BT Band 2 Rail Cargo Austria, Loading guideline 100.1; Contact of pallet to bulk head is mandatory; respectively the maximum distance of 45 mm has to be guaranteed. Maximum weight of goods between bulk heads is 5 t.

5.2.3
Warehouse storing

More-Way packaging
One Way packaging max. 3 pallet layers – 3rd layer with offset.

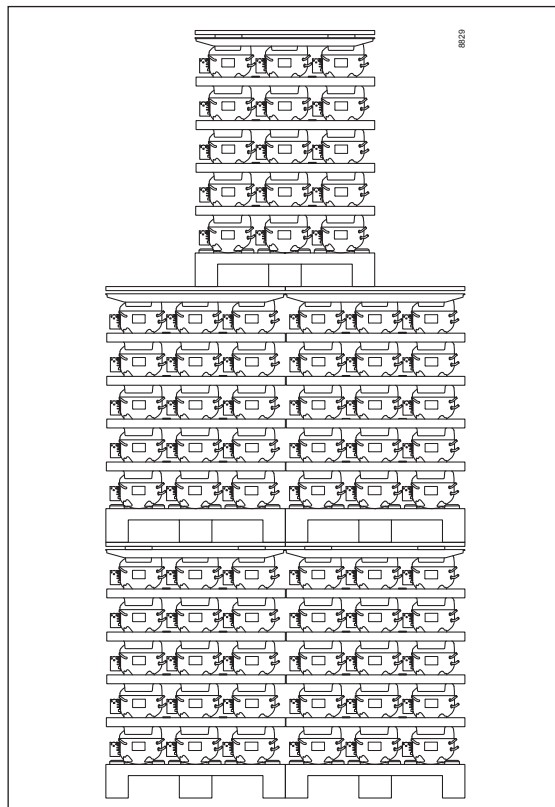

Attention: Single packaging one pallet layer only!

5.2.4
Recycling of compressors

Oil and gas must be recycled separately. Afterwards the compressor must be removed from the refrigerator and has to be given to a scrap metal recycling unit.

ACCESSORIES


KAPPA

Table of Content


1	Electrical components.....	45
1.1	Terminal board assembly.....	45
1.2	Outline with terminal board cover.....	45
2	Electric terminal circuit diagram / Mounting accessories.....	46
2.1	Standard frontal version.....	46
2.2	Standard.....	46
2.3	Optional.....	46
3	Evaporation tray.....	47
3.1	Dimension of evaporation tray.....	47
3.2	Outline dimension with evaporation tray.....	47

1. ELECTRICAL COMPONENTS

1.1 Terminal board assembly

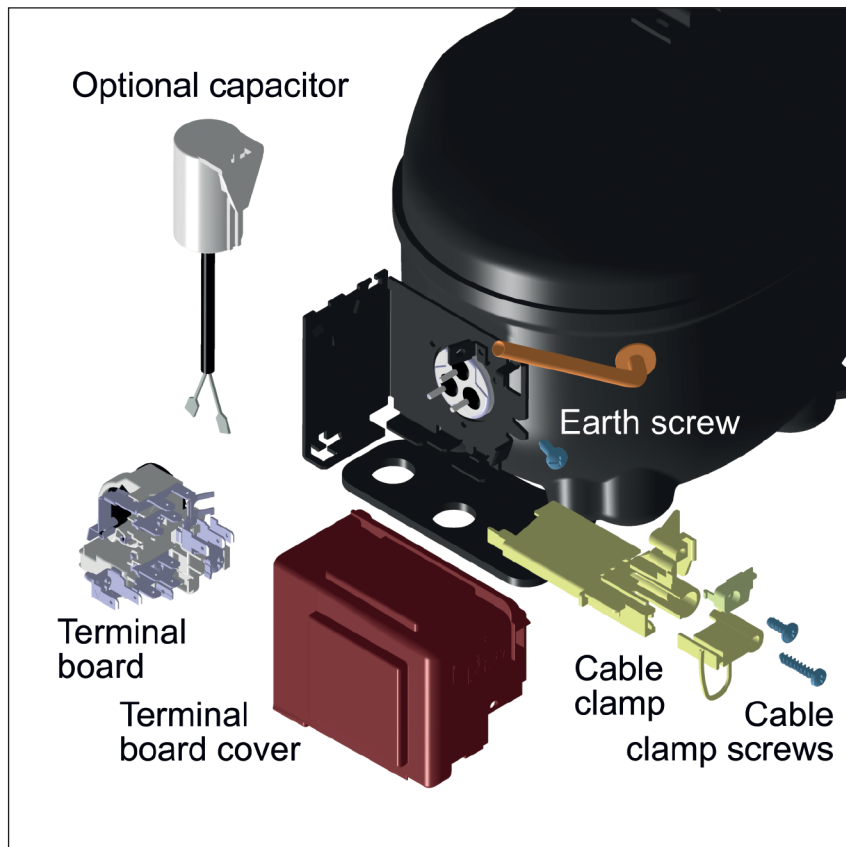


1.2 Outline with terminal board cover

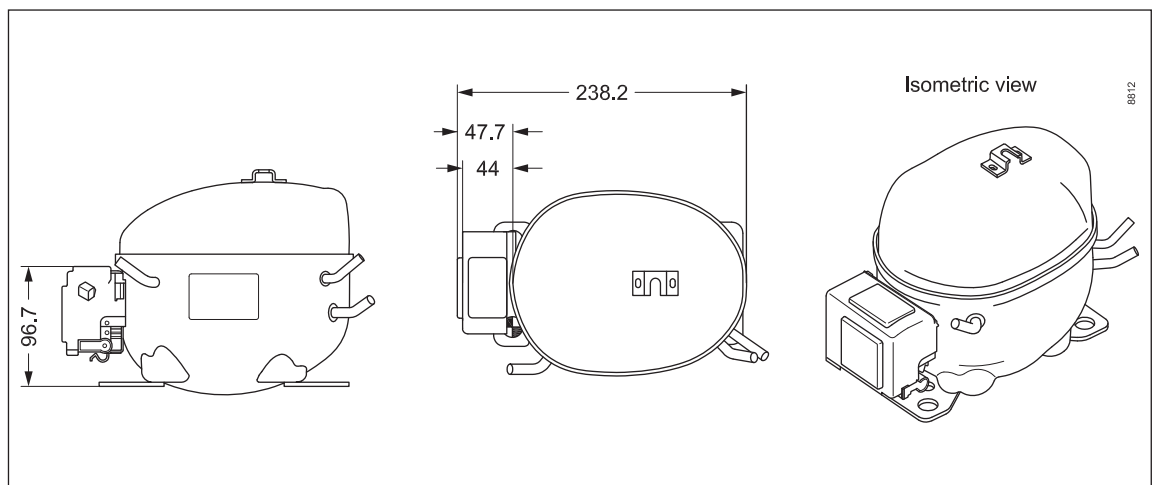


2.

ELECTRIC TERMINAL CIRCUIT DIAGRAM/ MOUNTING ACCESSORIES


2.1 Standard frontal version

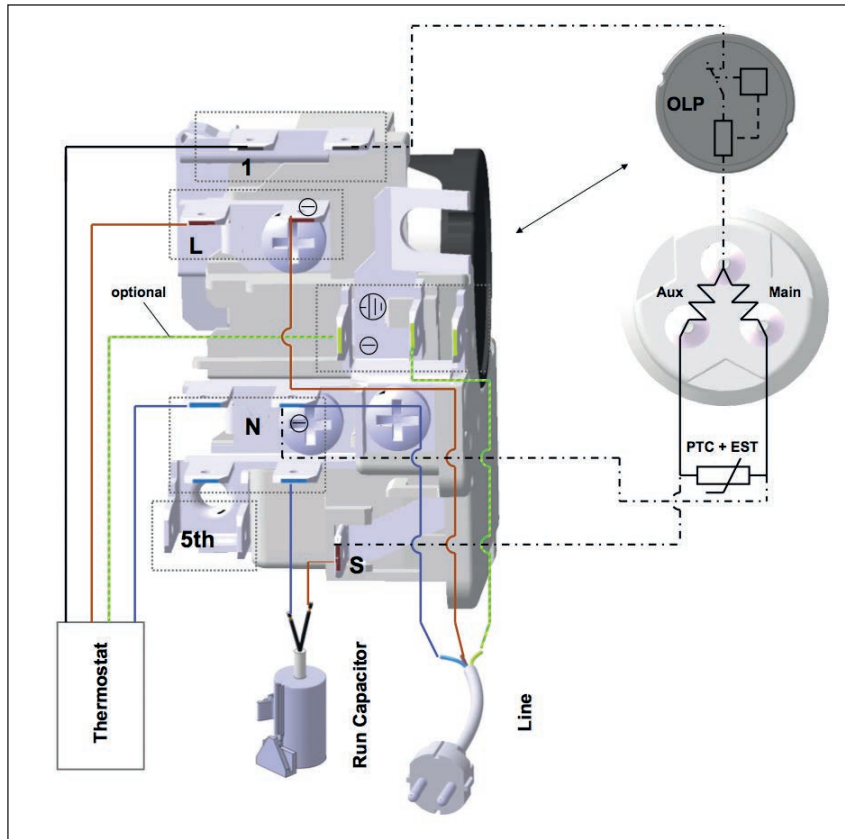

2.2 Standard

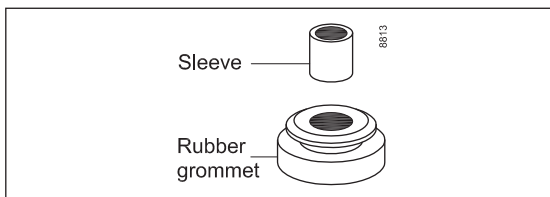


2.3 Optional

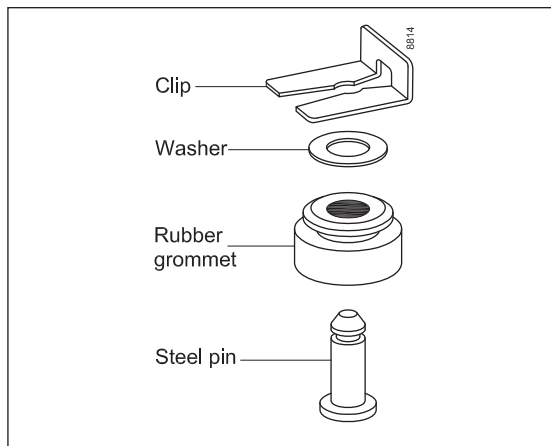


3.

EVAPORATION TRAY

3.1
Dimension of
evaporation tray

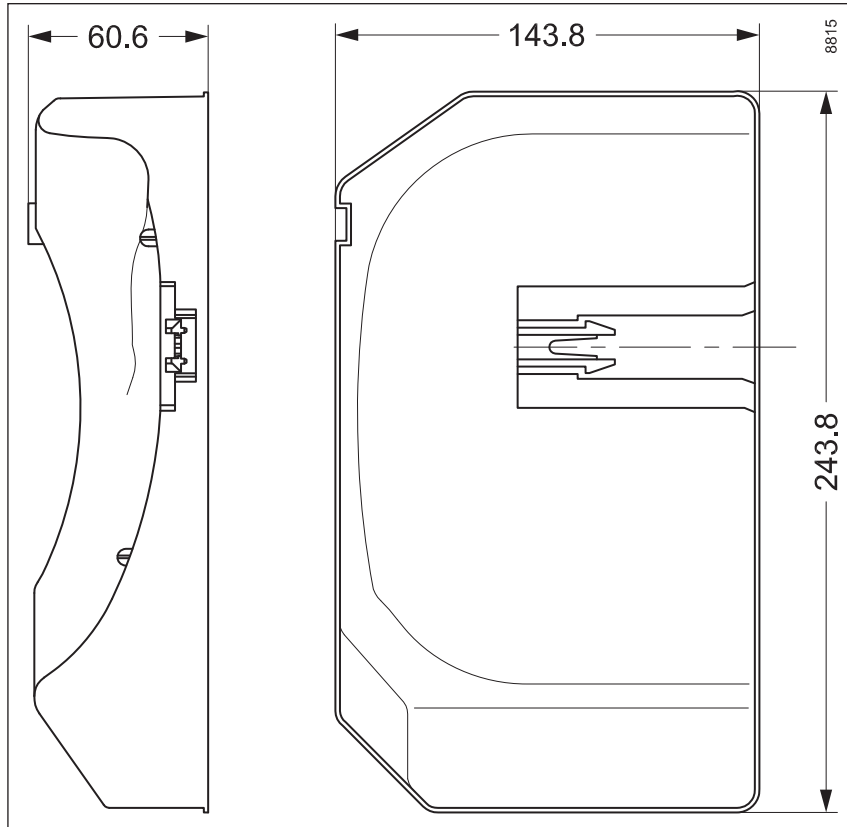

3.2
Outline dimension with
evaporation tray

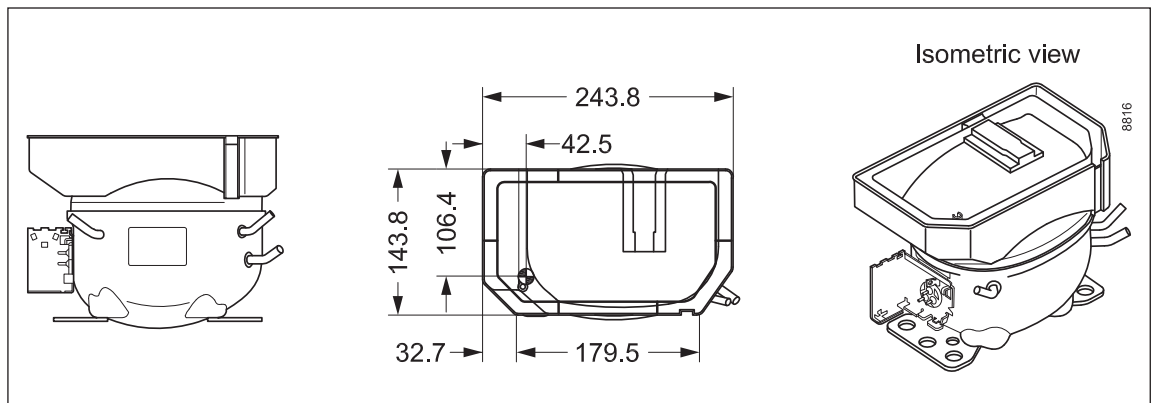

GENERAL PRODUCT DOCUMENTATION

DELTA



Table of Content

1	Compressor denomination / Label	49
2	Motor types / Approvals / Delivery conditions	50
2.1	Motor types	50
2.2	Certificate references	50
2.2.1	HXD	50
2.2.2	HTD	50
2.3	Delivery conditions	50
3	Drawings	51
3.1	Outline dimensions and tubes	51
3.2	3D sketch, mechanical data sketch	53
4	Transport, packing, palletization.....	54
4.1	Recommended transport positions when fitted into appliances.....	54
4.2	Packaging and palletization	54
4.2.1	Packaging type, pallet data.....	54
4.2.2	Transport	54
4.2.3	Warehouse storing	55
4.2.4	Recycling of compressors.....	55
5	Electrical components / Electric terminal circuit diagram.....	56
5.1	Terminal board assembly	56
5.2	Electric terminal circuit diagram.....	56
6	Accessories.....	57
6.1	Adapter plate and compressor mounting.....	57
6.1.1	Outline dimensions with adapter plate	58
6.2	Plastic evaporation tray.....	58
6.2.1	Outline dimensions with plastic evaporation tray.....	58
7	Brazing and refrigerant charge.....	59

1.

COMPRESSOR DENOMINATION/ LABEL

1	2	3	4	5	group
H	X	D	55	AA	example

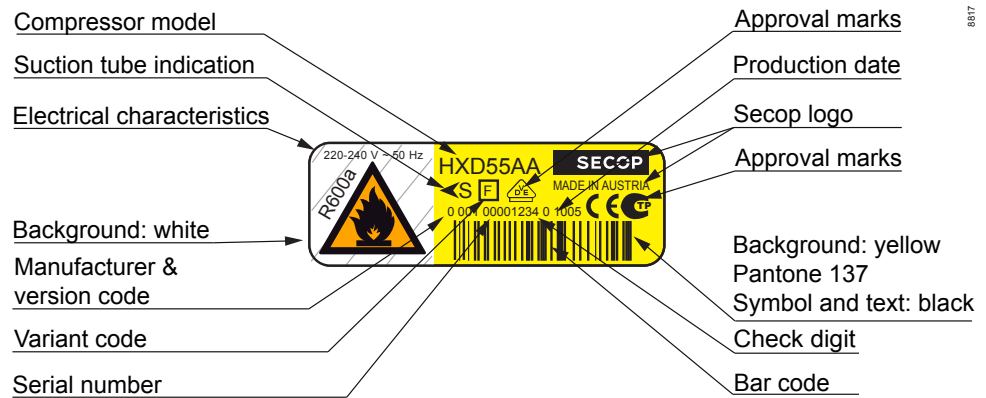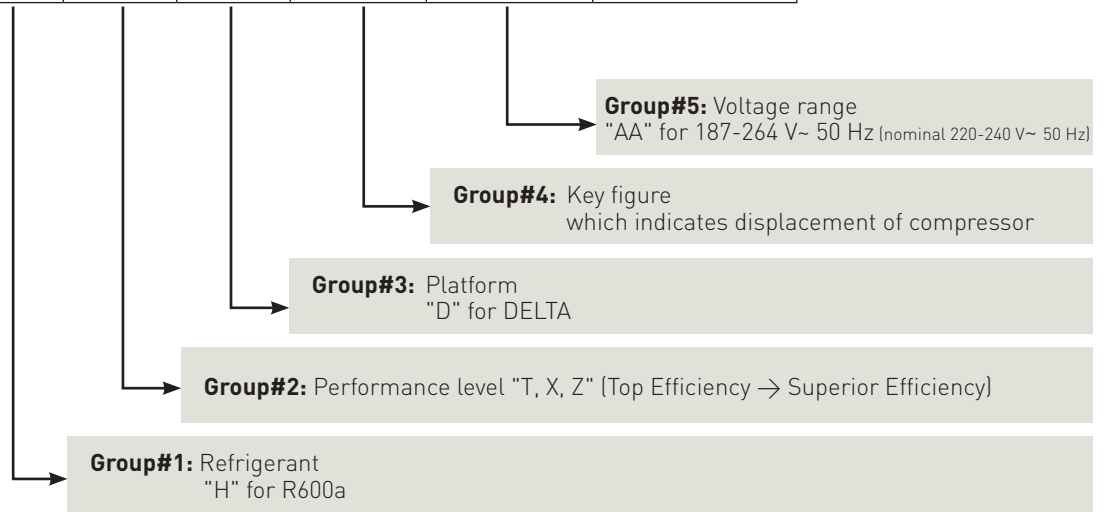

2.

MOTOR TYPES/ APPROVALS/ DELIVERY CONDITIONS

2.1 Motor types

RSIR:	Resistance start – inductive run Start winding is interrupted after start-up by a PTC.
RSCR:	Resistance start – capacitive run For higher efficiency the auxiliary winding is supporting the main winding by a run capacitor.
RSIR/RSCR:	Depending on requirements motor can be used as RSIR or RSCR type.

2.2 Certificate references



2.2.1 HXD

VDE, (CE)	EAC
Licence No.	Licence No.
40029645	TC RU D-AT.AG27.B.00382

2.2.2 HTD




VDE, (CE)	EAC
Licence No.	Licence No.
40030818	TC RU D-AT.AG27.B.00382

2.3 Delivery conditions




Max. solid impurities	[mg]	30
Max. soluble impurities	[mg]	600
Max. total compressor water content (*)	[mg]	100

3. DRAWINGS


3.1 Outline dimensions and tubes

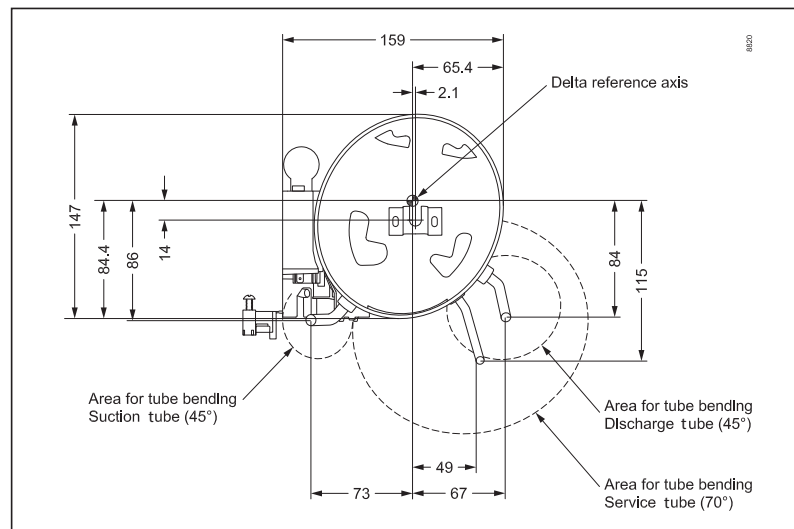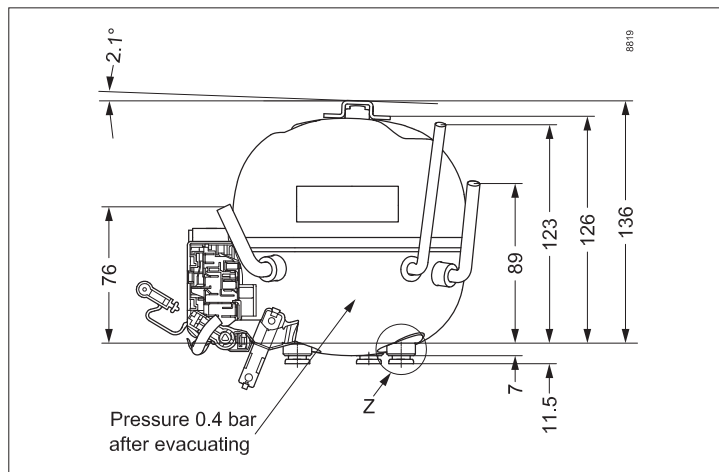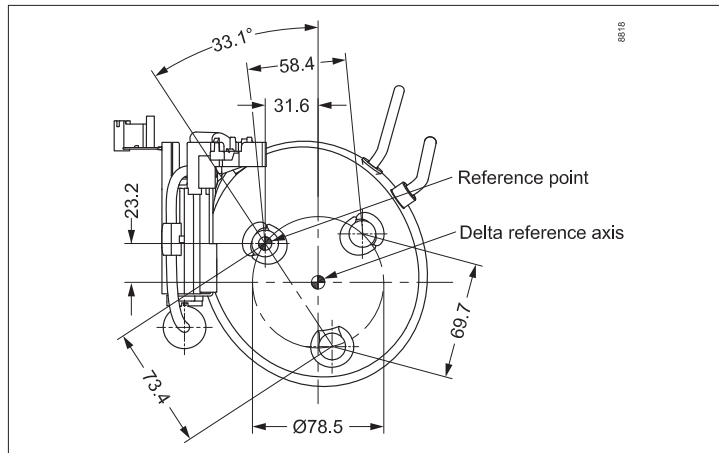

3.1
Outline dimensions
and tubes

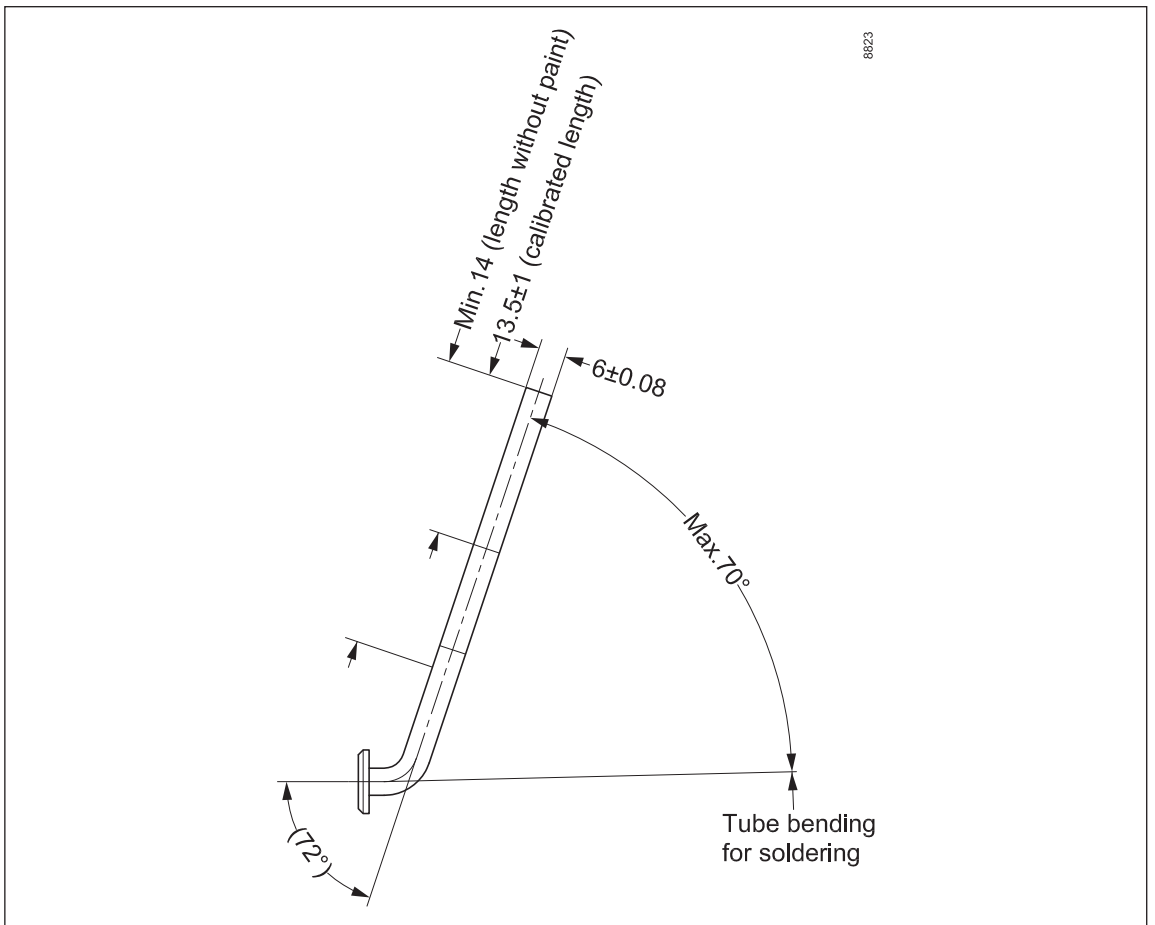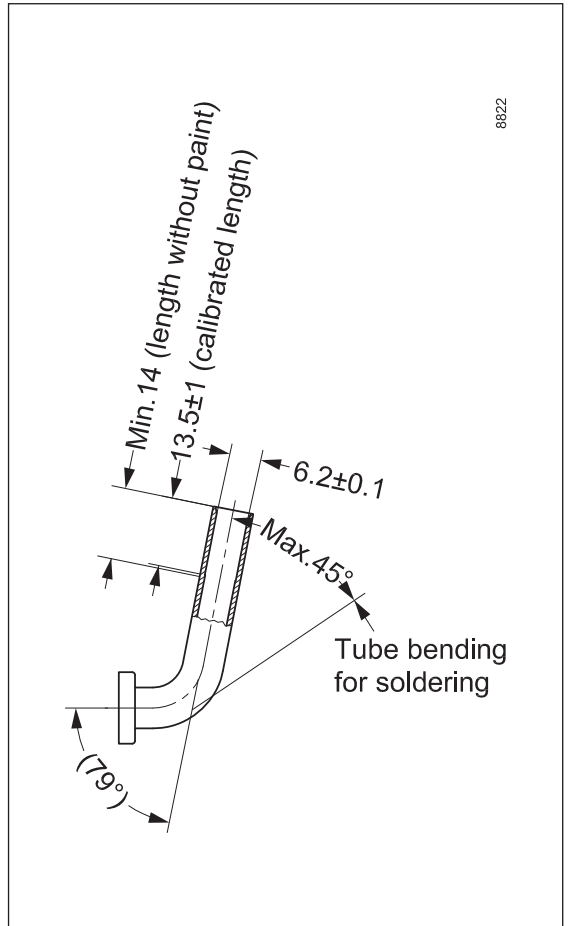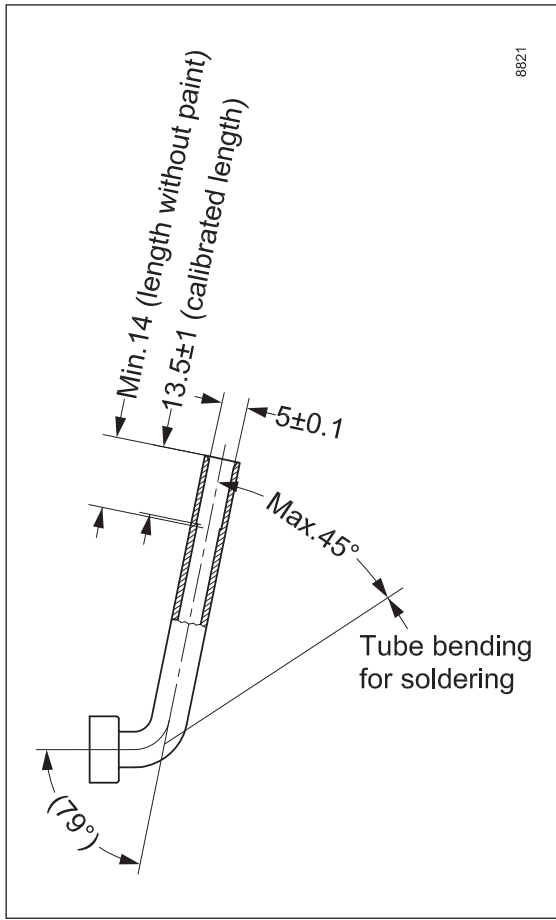


3.2
3D sketch, mechanical
data sketch

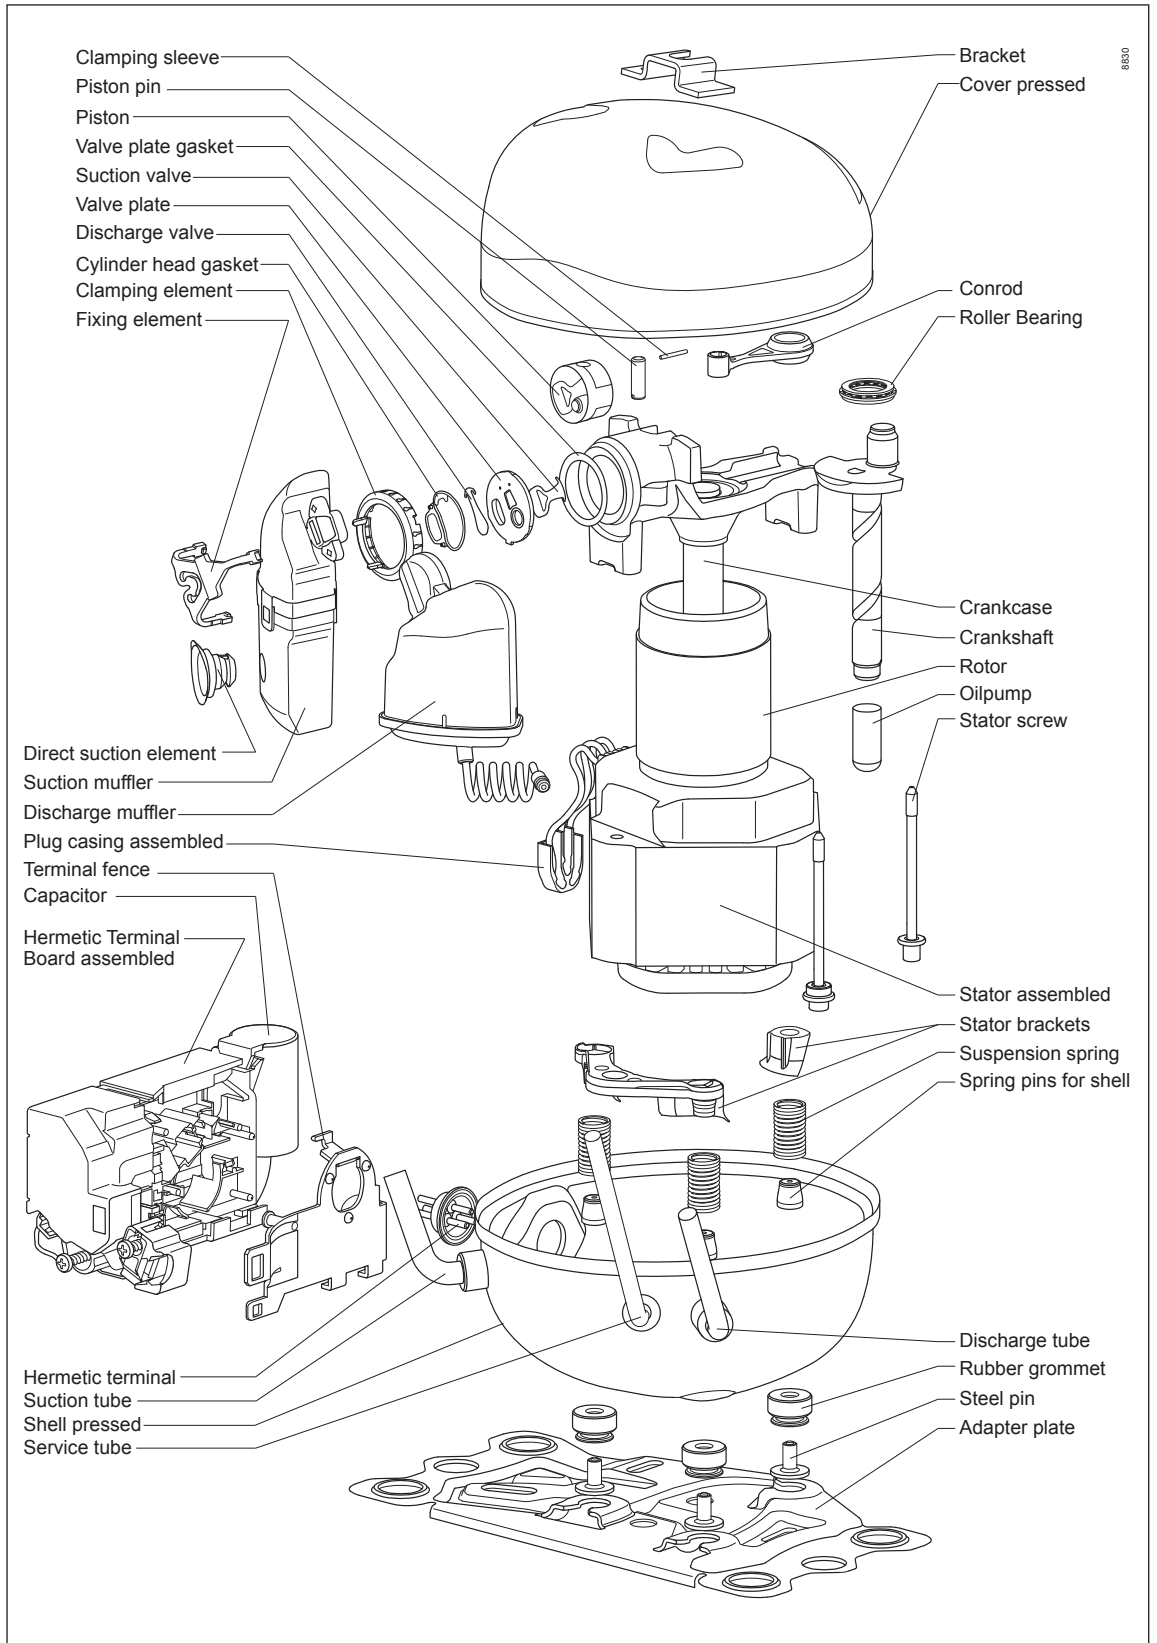

4.

TRANSPORT, PACKING, PALLETIZATION

4.1 Recommended transport positions when fitted into appliances

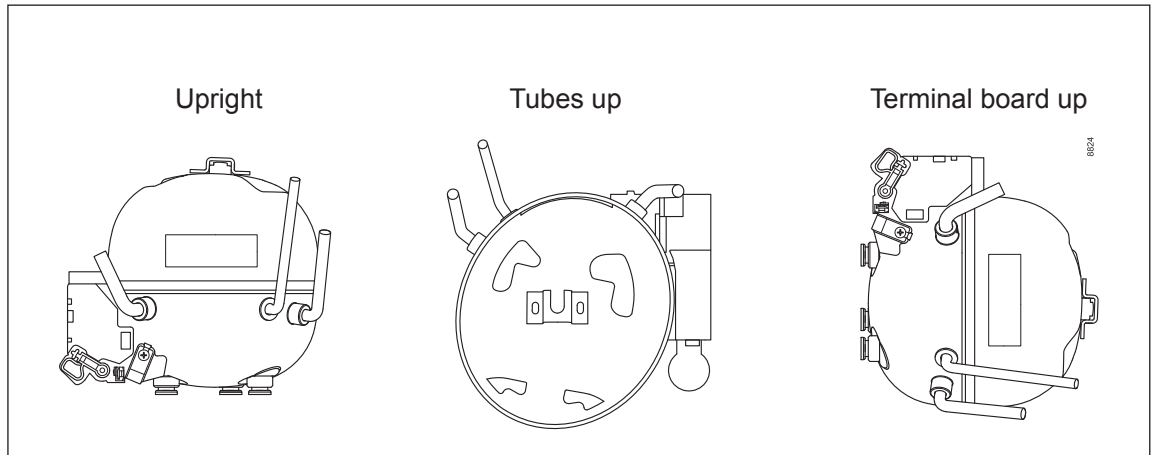

4.2 Packing and palletization

4.2.1 Packing type, pallet data


Packing-type		Layers	Quantity	Compressors per layer	Pallet Size L×W
				L×Q	mm
One-Way packaging	EPS + PE top foil	6	168	7×4 = 28	1200×800×1100
		5	140	7×4 = 28	1200×800×946
		4	112	7×4 = 28	1200×800×792
	EPS + Cardboard-box + PE top foil	6	168	7×4 = 28	1200×800×1100

4.2.2 Transport

Packing-type		Layers	Stacking height Number of pallets		
			Truck	Container	Train 1, 2
One-Way packaging	EPS + PE top foil	6	1	1	1
		5	1	1	1
		4	1	1	1
	EPS + Cardboard-box + PE top foil	6	1	2	1

- 1 Train transport according UIC-Codex 526-1. In sliding wall wagon with lockable bulkhead only;
- 2 Train loading according BT Band 2 Rail Cargo Austria, Loading guideline 100.1; Contact of pallet to bulk head is mandatory; respectively the maximum distance of 45 mm has to be guaranteed. Maximum weight of goods between bulk heads is 5 t.

4.2.3 Warehouse storing

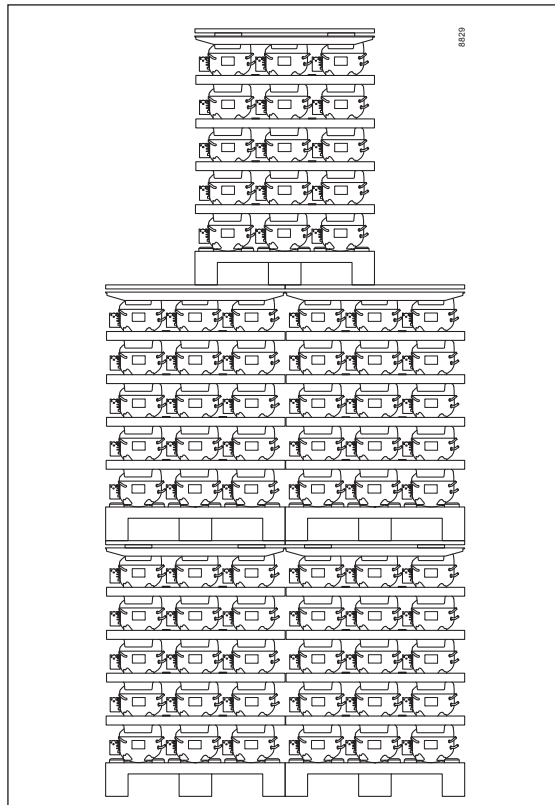

Attention: Single packaging one pallet layer only!


4.2.4 Recycling of compressors

Oil and gas must be recycled separately. Afterwards the compressor must be removed from the refrigerator and has to be given to a scrap metal recycling unit.


5.

ELECTRICAL COMPONENTS/ ELECTRIC TERMINAL CIRCUIT DIAGRAM

5.1
Terminal board
assembly

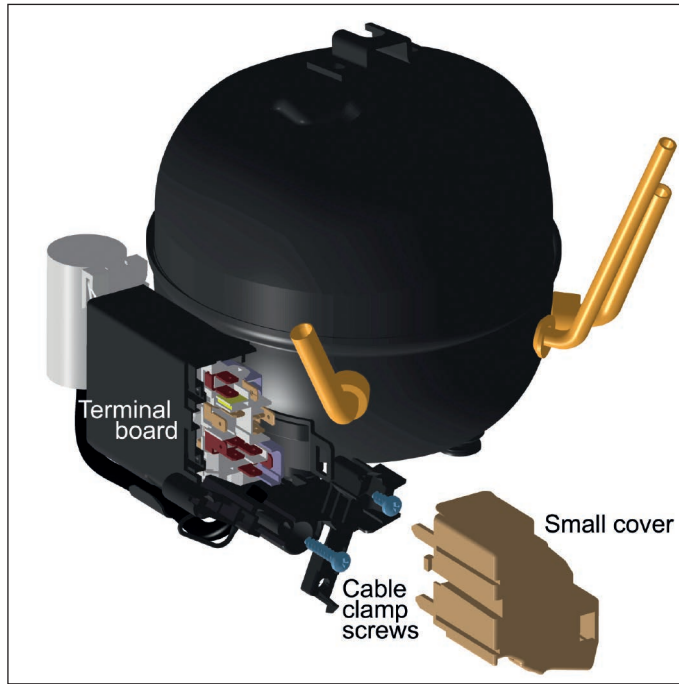


5.2
Electric terminal circuit
diagram

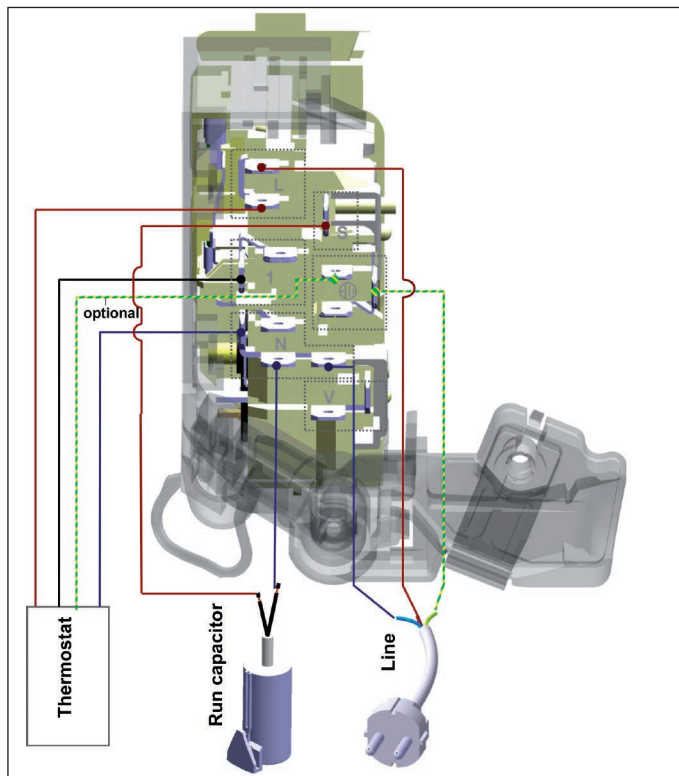


6. ACCESSORIES

6.1 Adapter plate

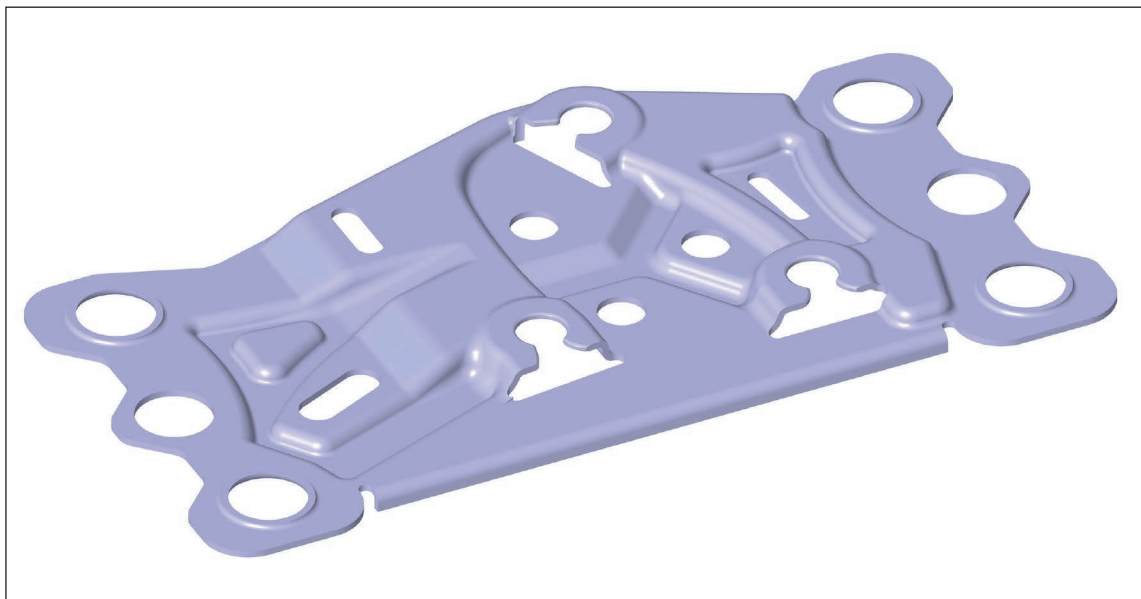


Compressor mounting

Step 1

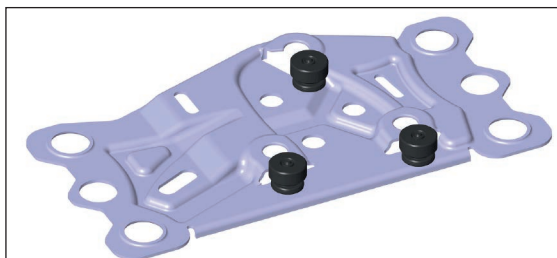


Put down compressor in front of key holes.

Step 2

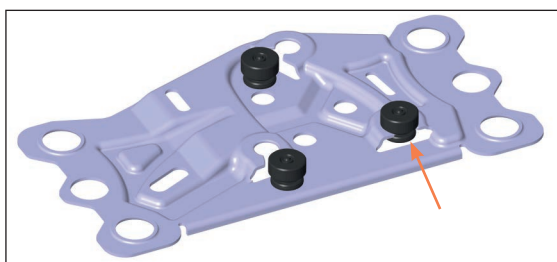


Click in first foot with linear movement.

Step 3

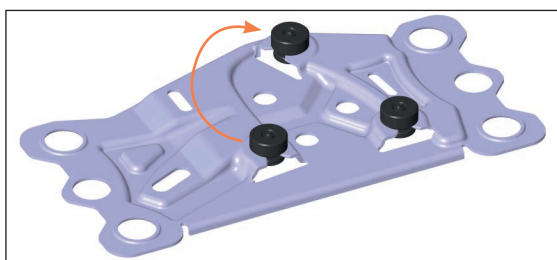


Click in foot 2 and 3 with rotary movement.


6.1.1
Outline dimensions with
adapter plate

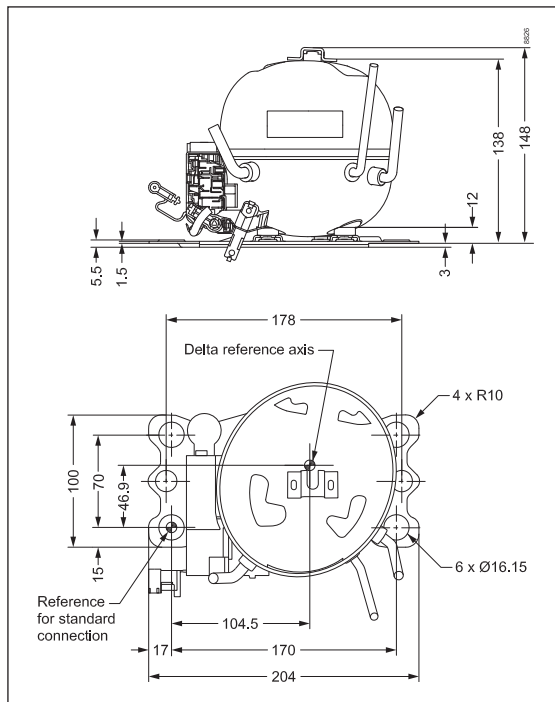

6.2
Plastic evaporation tray

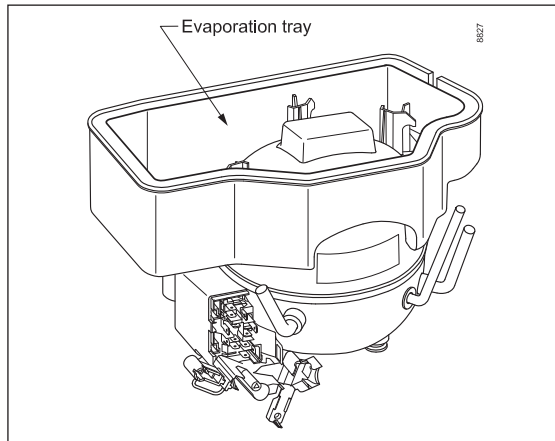

6.2.1
Outline dimensions with
plastic evaporation tray

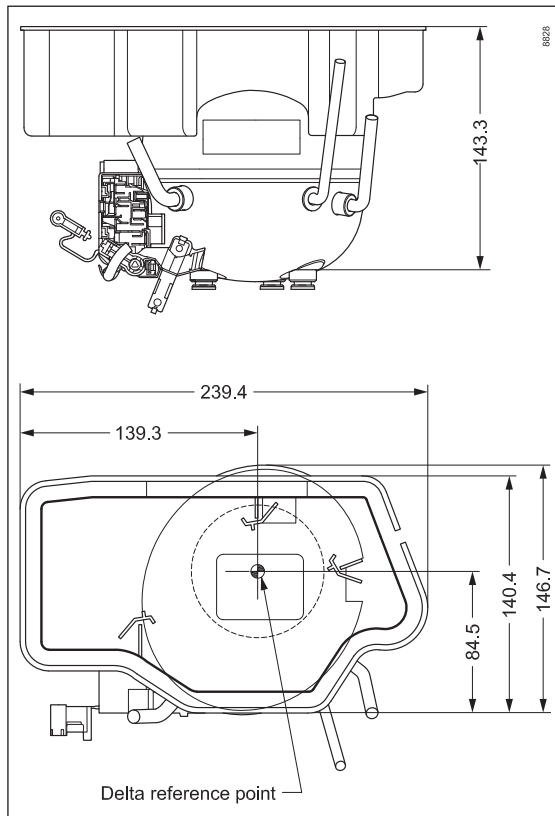

7.


BRAZING AND REFRIGERANT CHARGE



Use brazing protection shield



Do not reduce tube length

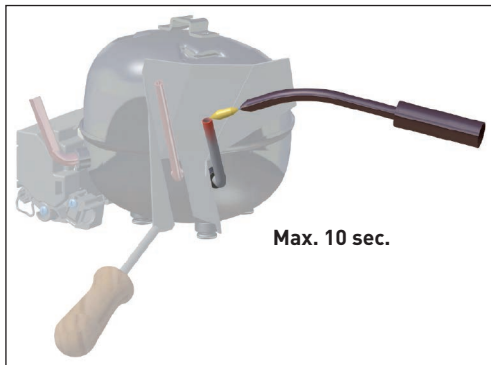


Max. 10 sec.

Factory/OEM:

Stop brazing after max. 10 sec to allow the tube to cool down

Service/Repair:

Use LokRing® tooling

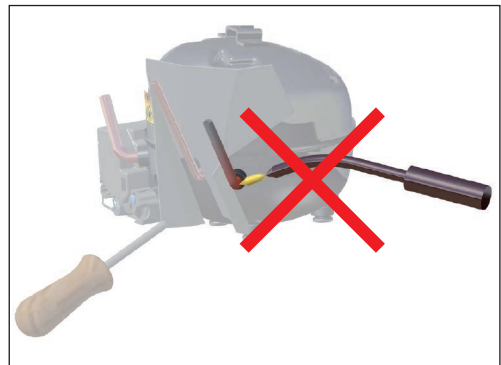

Factory/OEM:

Avoid heating tube root and direct flame on compressor surface

Service/Repair:

Use LokRing® tooling

Gas quantity

We recommend using roughly 10% less refrigerant versus Kappa to achieve optimum energy consumption.

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R134a

220-240 V | 50 Hz



P-Series	62-63
T-Series	64-65
N-Series	66-69
F-Series	70-71
S-Series	72-75
G-Series	76-77

Chemical formula

CH₂FCF₃

Typelabel

Typelabel stripe colour: Blue
Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSRC: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditons

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R134a • 220-240 V • 50 Hz • P-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity	COP		Cooling capacity	COP		Cooling capacity	COP		Capacity [W]	COP [W/W]	Capacity [W]	COP [W/W]	Capacity [W]	COP [W/W]	Capacity [W]	COP [W/W]	Capacity [W]	COP [W/W]	Capacity [W]	COP [W/W]
			[W]	[W/W]		[W]	[W/W]		[W]	[W/W]													
PL20F	101G0100	MBP		36	65	83				16	0.38	50	0.87						45	81	103		
PL35F	101G0202	MBP		60	101	125				32	0.64	79	1.10						75	125	156		
PL50F	101G0220	LBP	14	74						40	0.67	95	1.11			18	92						
PL50F	101G0222	MBP		74	120	148				40	0.69	95	1.14				92	149	184				
PL35G	101G0250	M/HBP		53	89	112	172	209		28	0.58	69	1.04	140	1.55		66	111	140	214	261		
PLE50F	101G0221	MBP		76	122	150				42	0.81	97	1.31				95	152	187				


R134a • 220-240 V • 50 Hz • P-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
PL20F	101G0100	103N0011	103N0018											103N1010	103N0491
PL35F	101G0202	103N0011	103N0018											103N1010	103N0491
PL50F	101G0220	103N0011	103N0018											103N1010	103N0491
PL50F	101G0222							117U6021	117U5014					103N1010	103N0491
PL35G	101G0250	103N0011	103N0018					117U6021	117U5014					103N1010	103N0491
PLE50F	101G0221			103N0016	103N0021			117-7117	117-7119					103N1010	103N0491

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer-data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
24	0.55	67	1.12				1/50	1.41	198-254 V, 50 Hz	S	129	127	6.2	6.2	5.0			1 5
45	0.86	105	1.39				1/25	2.00	198-254 V, 50 Hz	S	134	132	6.2	6.2	5.0			1 5
56	0.89						1/20	2.50	198-254 V, 50 Hz	S	137	135	6.2	6.2	5.0			1 5
56	0.92	126	1.41				1/20	2.50	198-254 V, 50 Hz	F1	137	135	6.2	6.2	5.0			1 5
39	0.79	93	1.31	174	1.89		1/20	2.00	198-254 V, 50 Hz *	F1	137	135	6.2	6.2	5.0		X	3 9
59	1.08	128	1.63			4	1/20	2.50	198-254 V, 50 Hz	S	140	138	6.2	6.2	5.0			1 5

PL / PLE

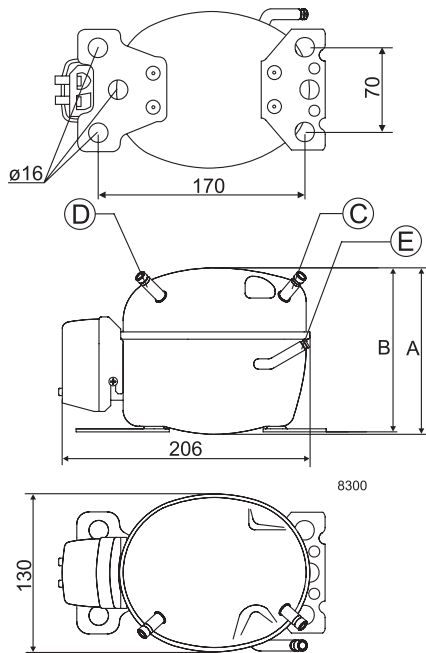

R134a • 220-240 V • 50 Hz • T-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
									LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C							
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
									[W]	[W/W]	[W]	[W/W]	[W]	[W/W]						
TL2.5F	102G4200	L/MBP		65	110	137			32	0.59	86	1.07				81	136	170		
TL3F	102G4300	L/MBP		82	138	173			42	0.64	108	1.09				101	171	215		
TL4F	102G4400	LBP	31	107					61	0.75	137	1.12			38	133				
TL5F	102G4501	LBP	43	144					82	0.81	183	1.19			53	178				
TL2.5G	102G4251	L/M/HBP	11	69	116	145	219	264	36	0.60	90	1.08	179	1.58	14	86	144	181	273	331
TL3G	102G4350	L/M/HBP		80	136	170	258	312	41	0.62	106	1.10	211	1.59		100	169	212	322	390
TL4G	102G4452	L/M/HBP		107	180	226	342	413	58	0.70	140	1.19	280	1.82		133	223	281	426	515
TL4G	102G4458	L/M/HBP		107	180	226	342	413	58	0.70	140	1.19	280	1.82		133	223	281	426	515
TL5G	102G4550	L/M/HBP		139	224	278	414	497	79	0.79	178	1.19	341	1.67		173	278	345	515	620
TL46H	102G4455	HBP		104	182	230	353	429			140	1.16	287	1.81		130	226	286	440	535
TLES3F	102G4310	L/MBP		93	155	193			50	0.81	121	1.31				115	192	240		
TLES4F	102G4410	LBP	33	124					70	0.88	160	1.35			41	154				
TLES5F	102G4510	LBP	50	169					98	0.93	216	1.37			62	210				
TLES6F	102G4610	LBP	58	183					104	0.93	235	1.37			72	227				
TLES5.7FT.3	102G4615	LBP	66	200					120	1.00	253	1.48			82	248				
TLES6.5FT.3	102G4703	LBP	72	228					134	1.01	290	1.56			89	283				
TLS5F	102G4520	LBP	48	170					98	0.88	216	1.33			59	210				
TLS6F	102G4620	LBP	58	183					104	0.87	235	1.30			72	227				
TLS7F	102G4720	LBP	66	208					120	0.88	264	1.28			82	258				
TLS3FT	102G4324	LBP	21	92					50	0.80	120	1.30			26	115				
TLS4FT	102G4424	LBP	27	117					63	0.72	152	1.24			34	145				
TLS5FT	102G4524	LBP	48	170					98	0.86	216	1.30			59	210				
TLY4F	102G4441	LBP	35	126					72	0.99	162	1.49			43	157				
TLY5FK	102G4547	LBP	50	169					98	1.01	216	1.48			62	210				

R134a • 220-240 V • 50 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)	Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades	Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
TL2.5F	102G4200	103N0011	103N0018										103N1010	103N2010
TL3F	102G4300	103N0011	103N0018							117U6007	117U5014		103N1010	103N2010
TL4F	102G4400	103N0011	103N0018							117U6009	117U5014		103N1010	103N2010
TL5F	102G4501	103N0011	103N0018							117U6004	117U5014		103N1010	103N2010
TL2.5G	102G4251	103N0011	103N0018							117U6007	117U5014		103N1010	103N2011
TL3G	102G4350	103N0011	103N0018							117U6009	117U5014		103N1010	103N2010
TL4G	102G4452	103N0011	103N0018							117U6004	117U5014		103N1010	103N2010
TL4G	102G4458	103N0011	103N0018							117U6004	117U5014		103N1010	103N2011
TL5G	102G4550	103N0011	103N0018							117U6000	117U5014		103N1010	103N2010
TL46H	102G4455									117U6000	117U5014		103N1010	103N2011
TLES3F	102G4310	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010
TLES4F	102G4410	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010
TLES5F	102G4510	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010
TLES6F	102G4610	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010
TLES5.7FT.3	102G4615	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119	117U6004	117U5014			103N1010	103N2010
TLES6.5FT.3	102G4703	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119	117U6016	117U5014			103N1010	103N2010
TLS5F	102G4520	103N0011	103N0018							117U6004	117U5014		103N1010	103N2010
TLS6F	102G4620	103N0011	103N0018							117U6004	117U5014		103N1010	103N2010
TLS7F	102G4720	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119	117U6000	117U5014			103N1010	103N2010
TLS3FT	102G4324	103N0011	103N0018							117U6007	117U5014		103N1010	103N2010
TLS4FT	102G4424	103N0011	103N0018							117U6004	117U5014		103N1010	103N2010
TLS5FT	102G4524	103N0011	103N0018							117U6000	117U5014		103N1010	103N2010
TLY4F	102G4441	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY5FK	102G4547	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] µF	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application		
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available	
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F			
46	0.80	115	1.35				1/25	2.61	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	1 7	
59	0.85	144	1.36				1/20	3.13	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			1 7	
84	0.98						1/10	3.86	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	1 7	
113	1.06						1/10	5.08	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1 2 7	
51	0.82	121	1.36	223	1.92		1/10	2.61	187-254 V, 50 Hz *	S	163	159	6.2	6.2	5.0		X	3	
59	0.85	142	1.38	262	1.93		1/10	3.13	187-254 V, 50 Hz *	S	163	159	6.2	6.2	5.0		X	3	
81	0.94	187	1.51	347	2.23		1/10	3.86	187-254 V, 50 Hz *	S	173	169	6.2	6.2	5.0		X	3	
81	0.94	187	1.51	347	2.23		1/10	3.86	187-254 V, 50 Hz *	S	173	169	6.5	6.5	5.0		X	3	
109	1.04	234	1.48	421	2.01		1/8	5.08	187-254 V, 50 Hz *	S	173	169	6.2	6.2	5.0		X	3	
		189	1.48	357	2.21		1/10	3.86	198-254 V, 50 Hz *	F2	173	169	6.2	6.2	5.0			8	
70	1.07	161	1.62				*	1/10	3.13	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
97	1.16						*	1/10	3.86	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
134	1.22						*	1/8	5.08	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1 2
143	1.20						*	1/8	5.70	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	1 2
163	1.30						*	1/7	5.70	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	1 2
183	1.33						4 *	1/6	6.49	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	2
134	1.15							1/8	5.08	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1 2
143	1.14							1/8	5.70	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1 2
165	1.15						*	1/7	6.49	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
69	1.07							1/10	3.13	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
88	0.97							1/10	3.86	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
134	1.12							1/8	5.08	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	1 2
99	1.30						4 *	1/10	3.86	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
134	1.32						4 *	1/8	5.08	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1 2

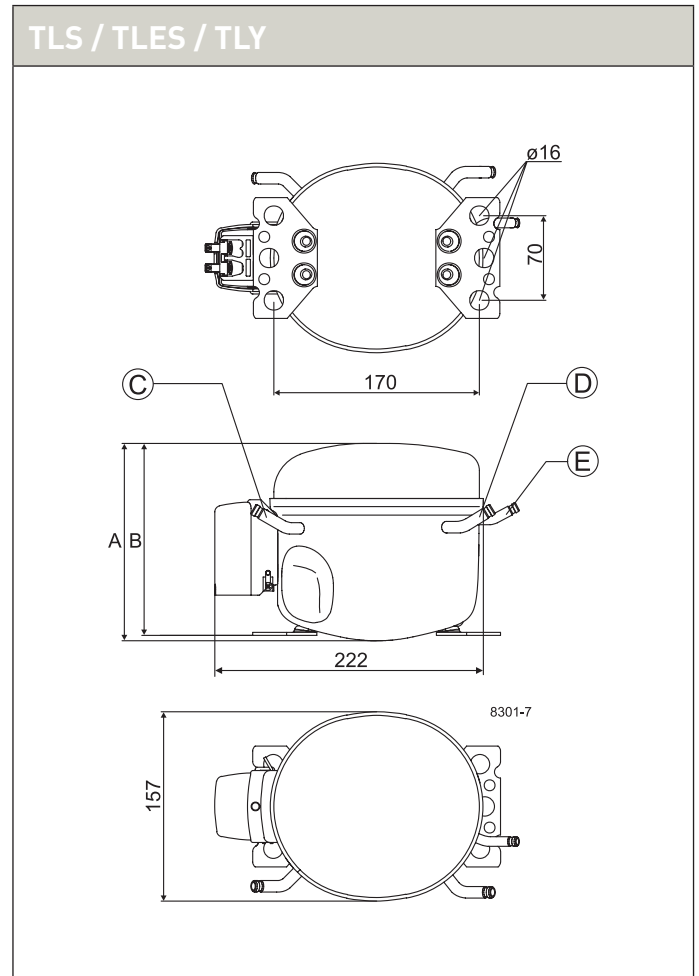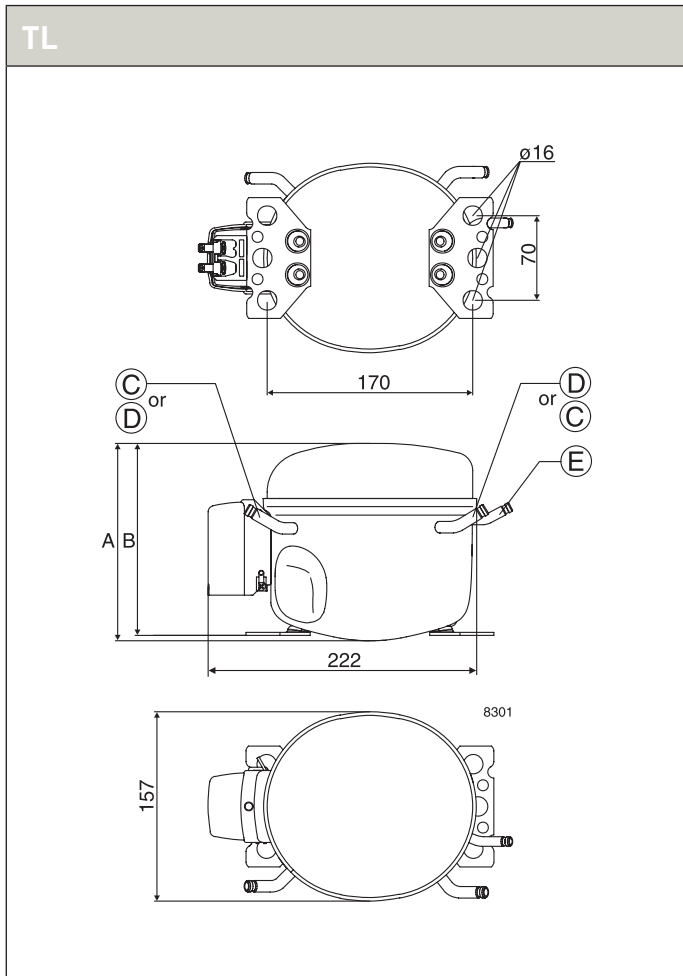

R134a • 220-240 V • 50 Hz • N-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
									LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C							
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
									[W]	[W/W]	[W]	[W/W]	[W]	[W/W]						
NF7FX	105G6743	L/MBP		262	422	522			150	0.85	336	1.36	636	2.01		325	523	647		
NF9FX	105G6841	L/MBP		288	464	577			168	0.84	369	1.31	709	1.94		357	576	716		
NF10FX	105G6846	L/MBP		339	543	673			196	0.72	433	1.17	823	1.76		418	672	833		
NF11FX	105G6944	L/MBP		368	585	725			216	0.74	467	1.17	887	1.72		455	726	899		
NL6F	105G6606	LBP	52	200					110	0.93	258	1.39			64	248				
NL7F	105G6706	LBP	71	238					136	0.93	303	1.31			88	295				
NL8F	105G6822	LBP	82	249					149	0.97	317	1.37			100	308				
NL9F	105G6802	LBP	74	268					155	0.93	340	1.31			92	332				
NL11F	105G6900	LBP	102	351					200	0.94	453	1.37			127	436				
NL6FT	105G6628	LBP	60	198					115	0.93	253	1.37			74	245				
NL6.1FT	105G6620	LBP	60	198					115	0.93	253	1.37			74	245				
NL7FT	105G6728	LBP	71	235					136	0.94	299	1.36			88	291				
NL7.3FT	105G6726	LBP	71	235					136	0.94	299	1.36			88	291				
NL7.3FT	105G6731	LBP	71	235					136	0.94	299	1.36			88	291				
NL8.4FT	105G6865	LBP	87	275					162	0.95	350	1.39			107	341				
NL8.4FT	105G6866	LBP	87	275					162	0.95	350	1.39			107	341				
NL9FT	105G6828	LBP	87	275					162	0.95	350	1.39			107	341				
NL10FT	105G6829	LBP	115	352					210	0.98	444	1.40			141	434				
NL10FT	105G6839	LBP	115	352					210	0.98	444	1.40			141	434				
NL6.1MF	105G6660	MBP		189	312	390	588	709			245	1.31	482	1.98		234	388	486	733	886
NL7.3MF	105G6772	MBP		236	385	480	719	867			304	1.34	591	1.98		293	478	597	896	1082
NL8.4MF	105G6879	MBP		277	445	553	825	994			353	1.36	679	1.94		343	552	687	1029	1242
NL10MF	105G6885	MBP		346	554	687	1023	1231			441	1.37	843	1.94		429	688	854	1274	1536
NL11MF	105G6151	M/HBP		380	609	756	1125	1354			485	1.35	927	1.87		471	756	939	1402	1689
NLE10MF	105G6888	MBP	88	343	554	688			194	0.98	440	1.43	845	1.98	110	426	687	855		

R134a • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST		
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NF7FX	105G6743													117U0349	117U1023
NF9FX	105G6841													117U0349	117U1021
NF10FX	105G6846													117U0349	117U1023
NF11FX	105G6944													117U0349	117U1023
NL6F	105G6606	103N0011	103N0018							117U6004	117U5015			103N1010	103N2010
NL7F	105G6706	103N0011	103N0018							117U6000	117U5015			103N1010	103N2010
NL8F	105G6822	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL9F	105G6802	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL11F	105G6900	103N0011	103N0018							117U6002	117U5015			103N1010	103N2010
NL6FT	105G6628	103N0011	103N0018							117U6000	117U5015			103N1010	103N2010
NL6.1FT	105G6620	103N0011	103N0018							117U6017	117U5015			103N1010	103N2010
NL7FT	105G6728	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL7.3FT	105G6726	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL7.3FT	105G6731	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL8.4FT	105G6865	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL8.4FT	105G6866	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
NL9FT	105G6828	103N0011	103N0018							117U6015	117U5015			103N1010	103N2010
NL10FT	105G6829	103N0011	103N0018							117U6002	117U5015			103N1010	103N2010
NL10FT	105G6839	103N0011	103N0018							117U6002	117U5015			103N1010	103N2010
NL6.1MF	105G6660	103N0011	103N0018							117U6015	117U5015			103N1010	103N2011
NL7.3MF	105G6772	103N0011	103N0018							117U6016	117U5015			103N1010	103N2011
NL8.4MF	105G6879	103N0011	103N0018							117U6016	117U5018			103N1010	103N2011
NL10MF	105G6885	103N0011	103N0018							117U6022	117U5018			103N1010	103N2011
NL11MF	105G6151	103N0011	103N0018							117U6022	117U5018			103N1010	103N2011
NLE10MF	105G6888	103N0011	103N0018				103N0050			117U6003	117U5015			103N1010	103N2010

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling (refer to data sheet)	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]	Connectors location/I.D. [mm]				alt. connectors available		
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP							Suction C	Process D	Dis- charge E	Oil cooler F			
206	1.12	441	1.71	781	2.43		1/4	7.27	198-242 V, 50 Hz *	S	203	197	8.2	6.5	6.5		X	3
229	1.10	485	1.64	874	2.36		1/4	8.34	198-242 V, 50 Hz	F1	203	197	8.2	6.5	6.5		X	3
267	0.95	567	1.47	1011	2.13		1/3	10.09	198-242 V, 50 Hz *	F1	203	197	8.2	6.5	6.5		X	3
294	0.97	612	1.46	1092	2.08		1/3	11.15	198-242 V, 50 Hz	F2	203	197	8.2	6.5	6.5		X	3
152	1.22						1/7	6.13	198-254 V, 50 Hz	S	188	181	6.2	6.2	5.0			2
187	1.21						1/6	7.27	198-254 V, 50 Hz	S	190	183	6.2	6.2	5.0			2
201	1.25						1/5	7.95	198-254 V, 50 Hz	S	197	191	6.2	6.2	5.0			2
213	1.21						1/5	8.35	198-254 V, 50 Hz	S	197	191	8.2	6.2	6.2			2
274	1.23						1/4	11.15	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2		X	2
157	1.21						1/7	6.13	187-254 V, 50 Hz *	S	197	191	6.2	6.2	5.0			2
157	1.21						1/7	6.13	187-254 V, 50 Hz	S	188	182	6.2	6.2	5.0			2 4
186	1.22						1/6	7.27	187-254 V, 50 Hz	S	197	191	6.2	6.2	5.0			2 4
186	1.22						1/6	7.27	187-254 V, 50 Hz	S	188	182	6.2	6.2	5.0			2 4
186	1.22						1/6	7.27	187-254 V, 50 Hz	S	188	182	6.2	6.2	5.0	5.0		2 4
220	1.24						1/5	8.35	187-254 V, 50 Hz	F1	190	184	6.2	6.2	5.0		X	2 4
220	1.24						1/5	8.35	187-254 V, 50 Hz	F1	190	184	6.2	6.2	5.0	5.0	X	2 4
220	1.24						1/5	8.35	187-254 V, 50 Hz	S	197	191	6.2	6.2	5.0		X	2 4
285	1.25						1/4	10.09	187-254 V, 50 Hz	S	203	197	8.2	6.2	6.2		X	2 4
285	1.25						1/4	10.09	187-254 V, 50 Hz	S	203	197	8.2	6.2	6.2	6.2	X	2 4
		326	1.66	597	2.41		1/6	6.13	187-254 V, 50 Hz *	S	190	184	8.2	6.2	6.2		X	3
		402	1.69	731	2.40		1/5	7.27	187-254 V, 50 Hz *	F1	197	191	8.2	6.2	6.2		X	3
		465	1.69	839	2.35		1/4	8.35	187-254 V, 50 Hz *	F1	197	191	8.2	6.2	6.2		X	3
		580	1.70	1040	2.35		1/3	10.09	187-254 V, 50 Hz *	F1	203	197	8.2	6.2	6.2		X	3
		638	1.66	1144	2.26		1/3	11.15	187-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2		X	3
268	1.28	579	1.76	1044	2.40	*	1/3	10.09	198-254 V, 50 Hz	F1	203	197	8.2	6.2	6.2			3

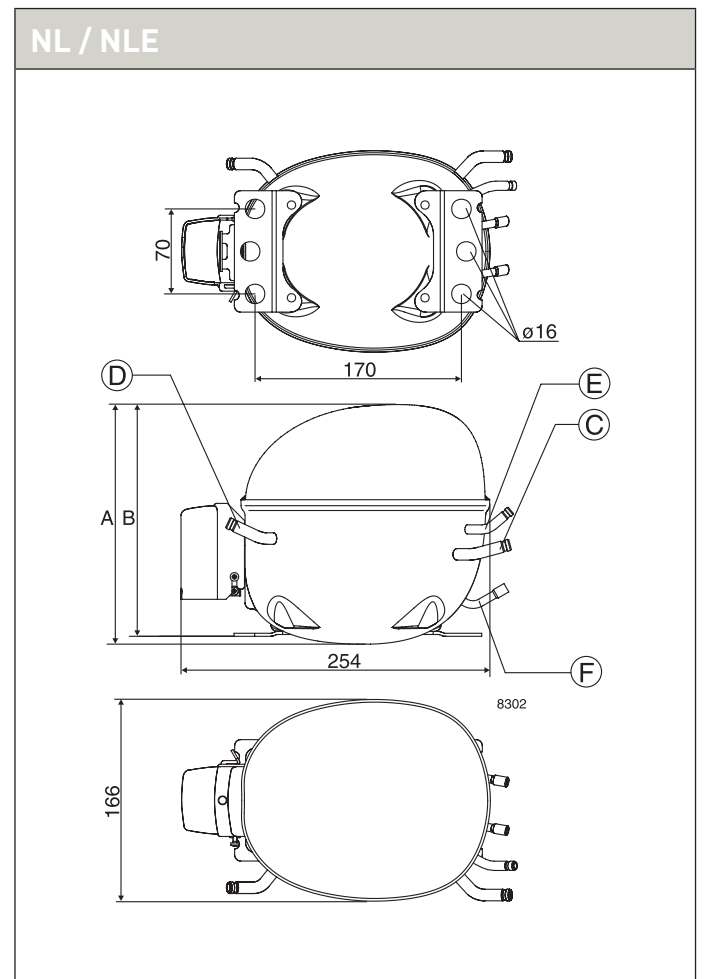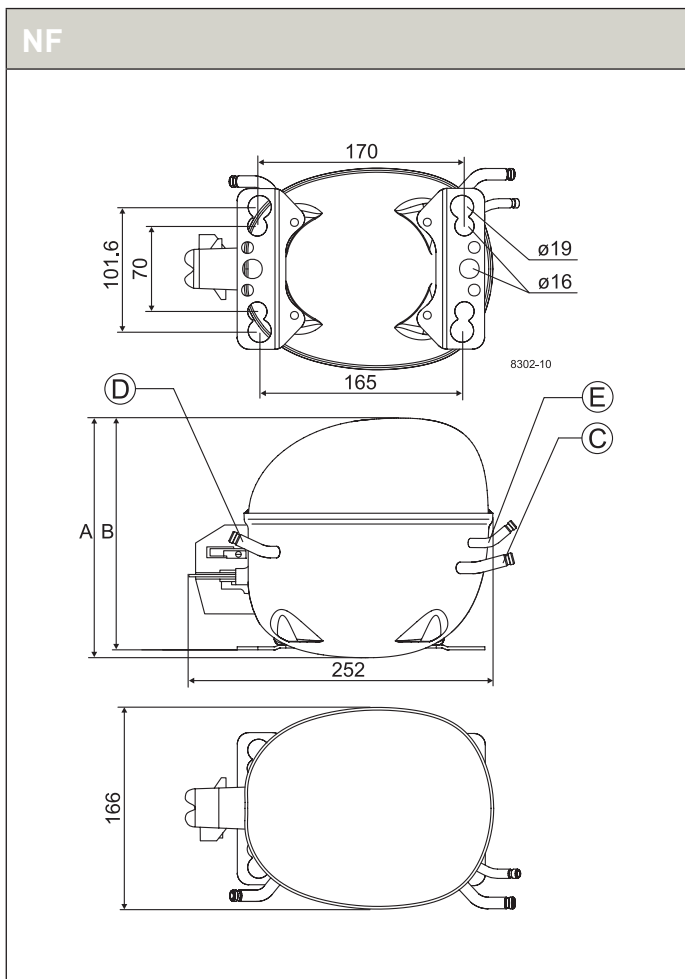


R134a • 220-240 V • 50 Hz • N-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54,4°C, T _{liq} =32,2°C, T _{suc} =32,2°C Evaporating temperature [°C]													
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15	
			Capacity	COP	Capacity	COP	Capacity	COP	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]
NLY6F	105G6630	LBP	80	235					138	1.17	299	1.65					99	291										
NLY7F	105G6730	LBP	94	265					158	1.18	334	1.67					115	328										
NLY7F	105G6735	LBP	94	265					158	1.18	334	1.67					115	328										
NLY9FK	105G6814	LBP	92	291					171	1.13	372	1.60					115	361										
NLY9FK	105G6830	LBP	94	297					175	1.15	380	1.63					117	368										

R134a • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NLY6F	105G6630			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLY7F	105G6730			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLY7F	105G6735			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLY9FK	105G6814			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLY9FK	105G6830			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
188	1.51					4	1/6	6.70	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
214	1.53					4	1/5	7.27	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
214	1.53					4	1/5	7.27	198-254 V, 50 Hz	S	203	197	6.5	6.5	5.0		X	2
233	1.47					4	1/5	8.35	198-254 V, 50 Hz	S	203	197	6.5	6.5	4.9		X	2
238	1.50					4	1/5	8.35	198-254 V, 50 Hz	S	203	197	8.2	6.2	6.2		X	2

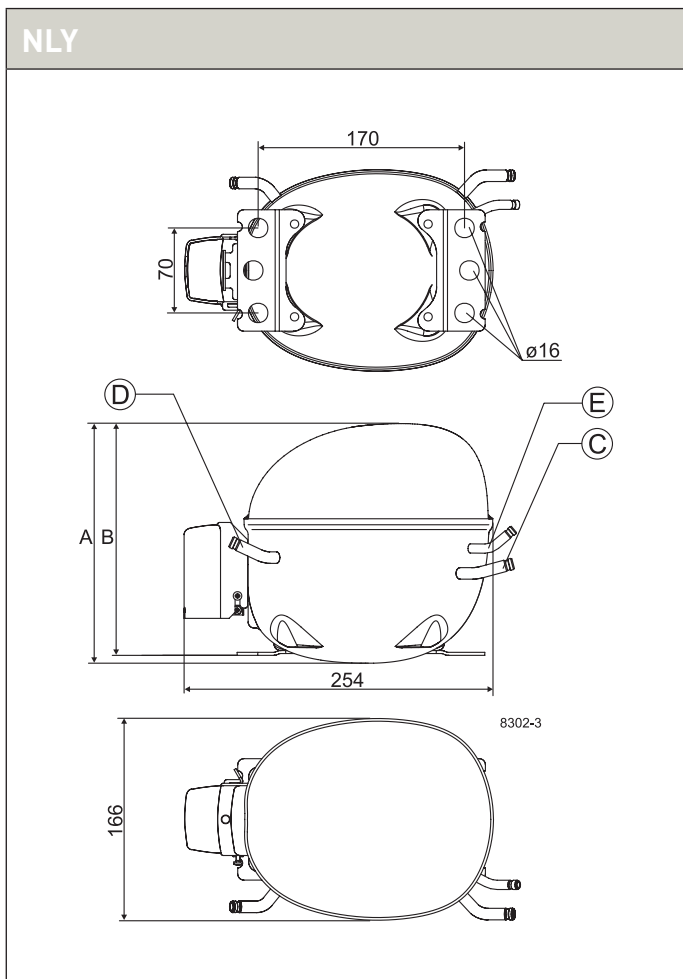


R134a • 220-240 V • 50 Hz • F-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]
FR6G	103G6660	L/M/HBP	171	290	365	552		83	0.76	226	1.32	452	1.88		213	360	453	688					
FR7.5G	103G6680	L/M/HBP	193	325	408	618		99	0.79	254	1.30	505	1.86		240	403	507	770					
FR7.5G	103G6690	L/M/HBP	193	325	408	618		99	0.79	254	1.30	505	1.86		240	403	507	770					
FR8.5G	103G6780	L/M/HBP	228	381	478	722		123	0.82	298	1.29	592	1.84		284	473	594	900					
FR8.5G	103G6790	L/M/HBP	228	381	478	722		123	0.82	298	1.29	592	1.84		284	473	594	900					
FR10G	103G6880	L/M/HBP	250	412	516	779		136	0.76	324	1.22	638	1.76		310	511	641	970					
FR10G	103G6890	L/M/HBP	250	412	516	779		136	0.76	324	1.22	638	1.76		310	511	641	970					
FR11G	103G6980	L/M/HBP	307	501	628			170	0.84	395	1.25	780	1.75		381	622	781						
FR7GH	103G6683	HBP	199	327	417	655	807			255	1.33	525	2.04		247	408	520	818	1009				
FR7GH	103G6692	HBP	199	327	417	655	807			255	1.33	525	2.04		247	408	520	818	1009				

R134a • 220-240 V • 50 Hz • F-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
FR6G	103G6660	103N0011	103N0018						117U6000	117U5015			103N1010	103N2010	
FR7.5G	103G6680	103N0011	103N0018						117U6001	117U5015			103N1010	103N2010	
FR7.5G	103G6690	103N0011	103N0018						117U6001	117U5015			103N1010	103N2010	
FR8.5G	103G6780	103N0011	103N0018						117U6015	117U5015			103N1010	103N2010	
FR8.5G	103G6790	103N0011	103N0018						117U6015	117U5015			103N1010	103N2010	
FR10G	103G6880	103N0011	103N0018						117U6010	117U5015			103N1010	103N2010	
FR10G	103G6890	103N0011	103N0018						117U6010	117U5015			103N1010	103N2010	
FR11G	103G6980	103N0011	103N0018						117U6010	117U5015			103N1010	103N2010	
FR7GH	103G6683								117U6016	117U5015			103N1010	103N2011	
FR7GH	103G6692								117U6016	117U5015			103N1010	103N2011	

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		
121	1.04	302	1.64	560	2.28		1/6	6.23	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2			3
141	1.06	338	1.62	626	2.25		1/5	6.93	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2		X	3
141	1.06	338	1.62	626	2.25		1/5	6.93	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2	6.2		3
172	1.08	397	1.60	732	2.23		1/5	7.95	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2			3
172	1.08	397	1.60	732	2.23		1/5	7.95	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2	6.2		3
189	1.01	429	1.53	789	2.14		1/4	9.05	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2		X	3
189	1.01	429	1.53	789	2.14		1/4	9.05	187-254 V, 50 Hz *	F1	196	191	8.2	6.2	6.2	6.2		3
236	1.10	523	1.54				1/5	11.15	187-254 V, 50 Hz	F2	196	191	8.2	6.2	6.2		X	3
		341	1.65	658	2.52		1/5	6.93	198-254 V, 50 Hz *	F2	196	191	8.2	6.2	8.2			8
		341	1.65	658	2.52		1/5	6.93	198-254 V, 50 Hz *	F2	196	191	8.2	6.2	8.2	8.2		8

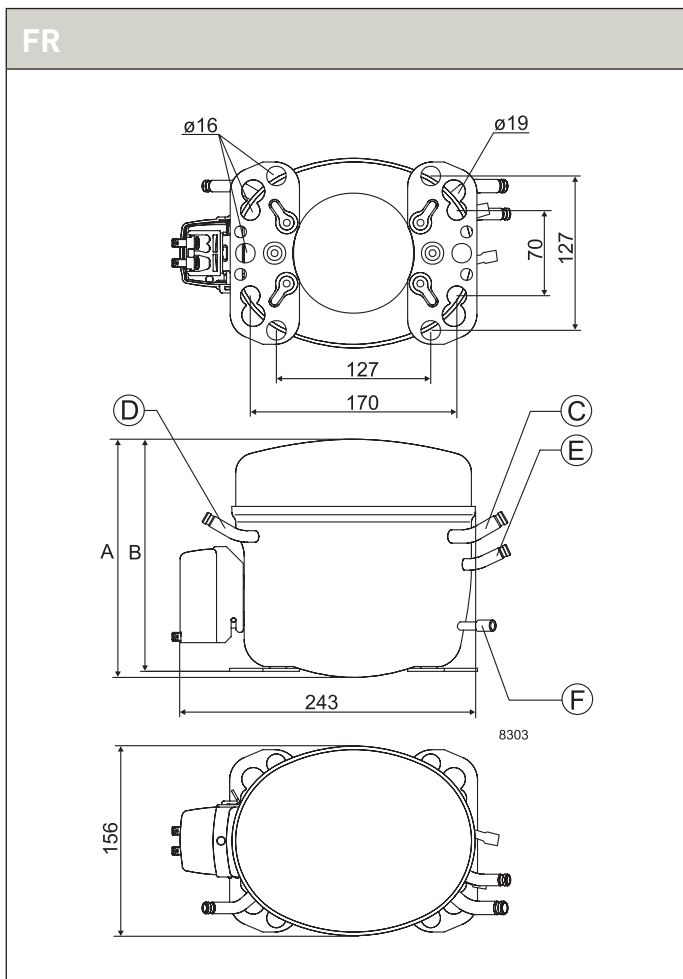

R134a • 220-240 V • 50 Hz • S-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]															
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15			
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]	
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15	-35	-15	-5	0
SC15F	104G8500	LBP	100	439	726				230	0.84	573	1.33				126	546	902												
SC18F	104G8800	LBP	129	518	842				280	0.90	669	1.36				159	641	1042												
SC21F	104G8100	LBP	186	602	987				335	0.88	780	1.30				228	743	1219												
SC21F	104G8110	LBP	186	602	987				335	0.88	780	1.30				228	743	1219												
SC12FT	104G8205	LBP	103	408	645				233	0.88	517	1.36				129	506	803												
SC12FT	104G8215	LBP	103	408	645				233	0.88	517	1.36				129	506	803												
SC15FT	104G8505	LBP	126	489	772				280	0.90	620	1.38				158	607	959												
SC18FTX	104G8805	LBP	144	567	896				325	0.89	719	1.39				181	704	1115												
SC21FTX	104G8105	LBP	192	713	1119				415	0.97	901	1.47				241	886	1393												
SC10G	104G8000	L/M/HBP	23	268	486	618	925	1100	113	0.63	369	1.27	764	2.00	30	334	604	767	1150	1370										
SC12G	104G8240	L/M/HBP	65	348	603	768	1182	1437	175	0.77	464	1.31	960	1.95	81	433	750	955	1473	1794										
SC12G	104G8250	L/M/HBP	65	348	603	768	1182	1437	175	0.77	464	1.31	960	1.95	81	433	750	955	1473	1794										
SC15G	104G8520	L/M/HBP		424	728	908	1340	1600	164	0.71	568	1.29	1110	1.87		528	905	1129	1671	2001										
SC18G	104G8820	L/M/HBP		532	873	1087	1619	1942	286	0.88	689	1.31	1335	1.89		659	1083	1349	2014	2420										
SC18G	104G8830	L/M/HBP		532	873	1087	1619	1942	286	0.88	689	1.31	1335	1.89		659	1083	1349	2014	2420										
SC21G	104G8140	L/M/HBP		606	1013	1269	1889	2254	333	0.96	793	1.39	1561	2.04		756	1262	1581	2355	2814										
SC10GH	104G8041	HBP		233	478	613	927	1113			352	1.25	762	1.93		290	593	762	1158	1394										
SC12GH	104G8261	HBP		302	577	752	1196	1471			429	1.20	957	1.97		378	719	937	1491	1837										
SC15GH	104G8561	HBP		417	723	915	1398	1698			559	1.32	1139	2.02		518	899	1139	1744	2120										
SC18GH	104G8860	HBP		539	855	1077	1645	1990			676	1.36	1340	1.92		667	1063	1340	2051	2485										
SC18GH	104G8861	HBP		485	825	1047	1618	1976			639	1.42	1310	2.17		603	1026	1303	2018	2468										
SC10GHH	104G8071	HBP		259	467	604	942	1144			352	1.35	762	2.21		322	581	751	1174	1428										
SC15GHH	104G8571	HBP		435	726	911	1405	1731			570	1.51	1135	2.25		534	898	1130	1748	2157										

R134a • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
SC15F	104G8500								117U6003	117U5017			103N1004	103N2009
SC18F	104G8800								117U6005	117U5017			103N1004	103N2009
SC21F	104G8100								117U6019	117U5017			103N1004	103N2009
SC21F	104G8110								117U6019	117U5017			103N1004	103N2009
SC12FT	104G8205	103N0011							117U6003	117U5017			103N1004	103N2009
SC12FT	104G8215	103N0011							117U6003	117U5017			103N1004	103N2009
SC15FT	104G8505	103N0011							117U6005	117U5017			103N1004	103N2009
SC18FTX	104G8805								117U6019	117U5017			103N1004	103N2009
SC21FTX	104G8105								117U6019	117U5017			103N1004	103N2009
SC10G	104G8000	103N0011							117U6002	117U5017			103N1004	103N2009
SC12G	104G8240	103N0011							117U6003	117U5017			103N1004	103N2008
SC12G	104G8250	103N0011							117U6003	117U5017			103N1004	103N2009
SC15G	104G8520								117U6005	117U5017			103N1004	103N2009
SC18G	104G8820								117U6019	117U5017			103N1004	103N2009
SC18G	104G8830								117U6019	117U5017			103N1004	103N2009
SC21G	104G8140									117U5373	117-7029		103N1004	103N2009
SC10GH	104G8041								117U6005	117U5017			103N1004	103N2008
SC12GH	104G8261								117U6011	117U5017			103N1004	103N2008
SC15GH	104G8561								117U6011	117U5017			103N1004	103N2008
SC18GH	104G8860								117U6019	117U5017			103N1004	103N2009
SC18GH	104G8861									117U5373	117-7039		103N1004	103N2008
SC10GHH	104G8071									117U5372	117-7025		103N1004	103N2009
SC15GHH	104G8571									117U5373	117-7027		103N1004	103N2009

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] μF	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
324	1.11	759	1.63				1/3	15.28	198-254 V, 50 Hz	F1	209	203	8.2	6.2	6.2			4
389	1.17	879	1.67				1/3	17.69	198-254 V, 50 Hz	F1	209	203	10.2	6.2	6.2			4
458	1.14	1026	1.59				1/2	20.95	198-254 V, 50 Hz	F1	219	213	10.2	6.2	6.2			4
458	1.14	1026	1.59				1/2	20.95	198-254 V, 50 Hz	F1	219	213	10.2	6.2	6.2	6.2		4
322	1.16	678	1.69				1/3	12.87	187-254 V, 50 Hz *	F1	209	203	8.2	6.2	6.2			4
322	1.16	678	1.69				1/3	12.87	187-254 V, 50 Hz *	F1	209	203	8.2	6.2	6.2	6.2		4
386	1.18	811	1.70				1/3	15.28	187-254 V, 50 Hz *	F2	209	203	10.2	6.2	6.2		X	4
448	1.17	942	1.73				1/2	17.69	187-254 V, 50 Hz *	F2	219	213	10.2	6.2	6.2		X	4
570	1.27	1178	1.82				1/2	20.95	187-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2			4
169	0.87	502	1.64	942	2.43		1/3	10.29	187-254 V, 50 Hz *	F2	199	193	8.2	6.2	6.2			3
249	1.03	626	1.65	1194	2.36		1/3	12.87	187-254 V, 50 Hz *	F2	209	203	8.2	6.2	6.2		X	3
249	1.03	626	1.65	1194	2.36		1/3	12.87	187-254 V, 50 Hz *	F2	209	203	8.2	6.2	6.2	6.2		3
261	1.01	760	1.61	1369	2.27		1/2	15.28	187-254 V, 50 Hz *	F2	209	203	10.2	6.2	6.2		X	3
398	1.14	910	1.63	1645	2.29		1/2	17.69	187-254 V, 50 Hz *	F2	219	213	10.2	6.2	6.2		X	3
398	1.14	910	1.63	1645	2.29		1/3	17.69	187-254 V, 50 Hz *	F2	219	213	10.2	6.2	6.2	6.2		3
462	1.23	1059	1.73	1928	2.48	10	3/4	20.95	187-254 V, 50 Hz *	F2	219	213	10.2	6.2	6.2		X	3
		490	1.61	944	2.35		1/3	10.29	198-254 V, 50 Hz *	F2	209	203	10.2	6.2	8.2			8
		594	1.56	1199	2.42		1/3	12.87	198-254 V, 50 Hz *	F2	209	203	10.2	6.2	8.2			8
		751	1.65	1415	2.49		1/2	15.28	198-254 V, 50 Hz *	F2	209	203	10.2	6.2	8.2		X	8
		892	1.67	1665	2.35		1/2	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	8.2			8
		857	1.79	1632	2.66	10	1/2	17.69	198-254 V, 50 Hz *	F2	219	213	10.2	6.2	8.2			8
		481	1.75	950	2.71	5	1/3	10.29	198-254 V, 50 Hz	F1	209	203	10.2	6.2	8.2	8.2		8
		753	1.89	1410	2.75	10	1/2	15.28	198-254 V, 50 Hz	F1	209	203	10.2	6.2	8.2	8.2	X	8

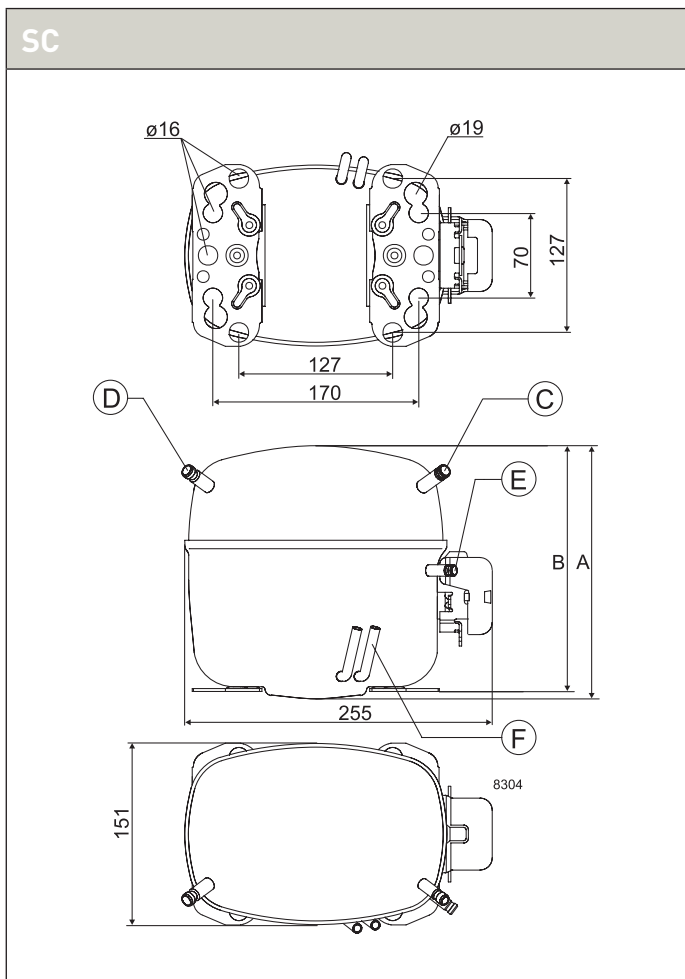

R134a • 220-240 V • 50 Hz • S-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]																	
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15					
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]			
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15
SC15MFX	104G8501	MBP		458	767	954	1405			226	0.81	602	1.38	1166	1.97			569	952	1186	1751											
SC18MFX	104G8804	MBP		553	894	1113	1670					709	1.34	1370	1.94			686	1109	1382	2079											
SC21MFX	104G8120	MBP		662	1052	1303	1936					840	1.37	1596	1.96			820	1306	1618	2411											
SC12/12G	104G8280	L/M/HBP	129	696	1206	1535	2364	2875	350	0.77	928	1.31	1920	1.95	163	866	1500	1910	2946	3587												
SC15/15G	104G8580	L/M/HBP		847	1457	1815	2679	3201	328	0.71	1137	1.29	2220	1.87		1055	1811	2258	3342	4001												
SC18/18G	104G8880	L/M/HBP		1053	1740	2174	3248	3900	566	0.86	1369	1.35	2674	1.92		1299	2153	2691	4032	4850												
SC21/21G	104G8180	L/M/HBP		1212	2026	2538	3778	4510	665	0.86	1584	1.37	3121	1.97		1510	2523	3160	4710	5630												

R134a • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
SC15MFX	104G8501								117U6005	117U5017			103N1004	103N2008
SC18MFX	104G8804								117U6019	117U5017	117-7027		103N1004	103N2008
SC21MFX	104G8120								117U6019	117U5017	117-7039		103N1004	103N2009
SC12/12G	104G8280								117U6003	117U5017			103N1004	103N2009
SC15/15G	104G8580								117U6005	117U5017			103N1004	103N2009
SC18/18G	104G8880								117U6019	117U5017			103N1004	103N2009
SC21/21G	104G8180									117U5373	117-7029		103N1004	103N2009

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μ F]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		alt. connectors available
326	1.10	800	1.71	1436	2.38		1/2	15.28	198-254 V, 50 Hz	F2	209	203	10.2	6.2	6.2			3
434	1.15	933	1.68	1694	2.36	*	1/2	17.69	187-254 V, 50 Hz *	F2	219	213	10.2	6.2	6.2			3
533	1.21	1101	1.70	1969	2.38	*	3/4	20.95	187-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2			3
497	1.03	1252	1.65	2388	2.36		3/4	25.74	187-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2			3
522	1.01	1519	1.61	2737	2.27		3/4	30.56	187-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2			3
783	1.12	1808	1.68	3291	2.31		1	35.38	187-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2			3
923	1.13	2116	1.72	3855	2.37	10	1 1/4	41.90	187-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2			3

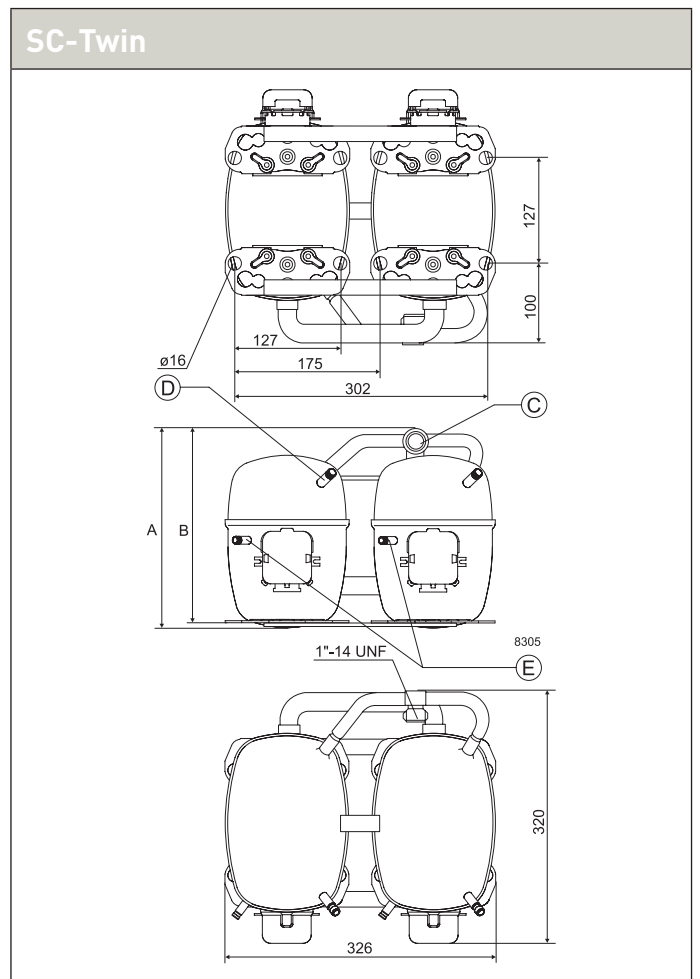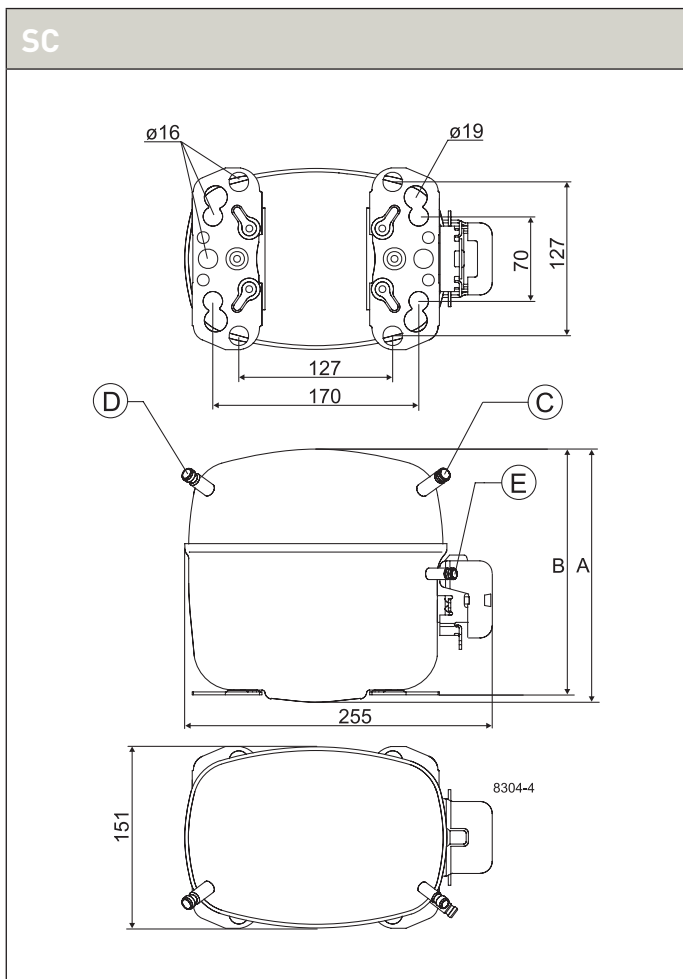

R134a • 220-240 V • 50 Hz • G-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]
GS26MFX	107B0700	MBP		938	1523	1893					1207	1.72	2327	2.37		1164	1892	2354					
GS34MFX	107B0701	MBP		1217	1992	2487					1572	1.68	3069	2.40		1511	2473	3090					
GS26GHX	107B0702	HBP		877	1407	1749	2624	3173			1119	1.48	2152	2.13		1088	1748	2175	3273	3965			

R134a • 220-240 V • 50 Hz • G-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
GS26MFX	107B0700											117-7055		107B9101
GS34MFX	107B0701											117-7056		107B9101
GS26GHX	107B0702											117-7070		107B9101

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
		1592	2.13			10	3/4	26.30	198-254 V, 50 Hz	F2	259	247	12.9	6.5	8.2			3
		2079	2.10	3799	2.90	10	1	33.80	198-254 V, 50 Hz	F2	259	247	12.9	6.5	8.2			3
		1472	1.84	2664	2.58	20	3/4	26.30	198-254 V, 50 Hz	F2	259	247	12.9	6.5	8.2			8

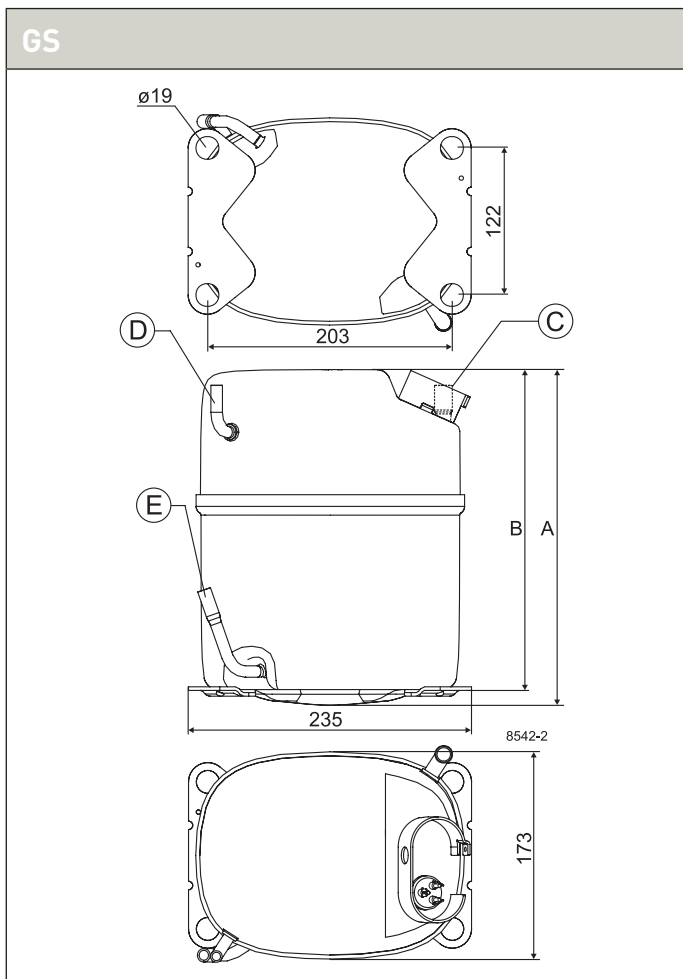

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R600a

220-240 V | 50 Hz



P-Series	80-81
T-Series	82-85
X-Series	86-87
D-Series	88-89
N-Series	90-93
KAPPA	94-95
DELTA	96-97

Chemical formula

C₄H₁₀

Typelabel

Typelabel stripe colour: Red
Typelabel colour: Yellow

Applications

- LBP:** Low Back Pressure
- HBP:** High Back Pressure
- MBP:** Medium Back Pressure

Motor types

- RSIR:** Resistant Start Induction Run
- RSRC:** Resistant Start Capacitor Run
- CSIR:** Capacitor Start Induction Run
- CSR:** Capacitor Start Run

Compressor cooling

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary

Starting devices

- LST:** Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
- HST:** High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
- ePTC:** Electronically controlled PTC
 - Compressor restart possible after a few seconds
 - Operational wattage loss reduced by 2 watt
 - PTC protection screen not needed (surface temp. < 82 °C)
 - Temperature resistant up to min. +60 °C
 - Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R600a • 220-240 V • 50 Hz • P-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]									
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15		
			Cooling capacity	COP		Cooling capacity	COP		Cooling capacity	COP		[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	
			[W]	[W/W]		[W]	[W/W]		[W]	[W/W]														
PLE35K	101H0360	MBP		52	87	109				27	0.68	68	1.28							63	106	133		

R600a • 220-240 V • 50 Hz • P-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
PLE35K	101H0360			103N0016	103N0021		117-7117	117-7119					103N1010	103N0491	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
38	0.91	90	1.60			4	1/25	2.50	198-254 V, 50 Hz	S	137	135	6.2	6.2	5.0		X	1 5

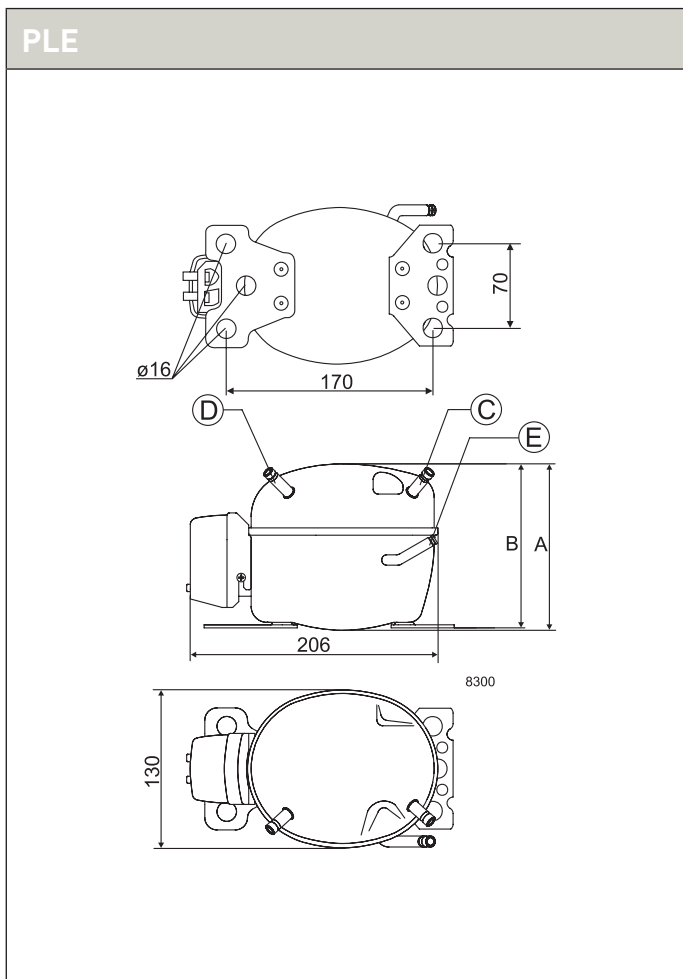

R600a • 220-240 V • 50 Hz • T-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]									
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15				
			-35	-15	-5	0	10	15																
			-35		-15		-5		0		10		15		-35		-15		-5		0		10	
TLES4KK.3	102H4438	LBP	18	75					42	0.90	96	1.43							23	91				
TLES4.8KK.3	102H4538	LBP	28	94					55	1.00	119	1.53							34	115				
TLES5.7KK.3	102H4638	LBP	36	114					68	1.02	144	1.54							45	139				
TLES6.5KK.3	102H4738	LBP	45	134					81	1.02	168	1.51							55	163				
TLES7.5KK.3	102H4838	LBP	53	155					94	1.02	194	1.52							64	189				
TLES8.7KK.3	102H4938	LBP	62	181					110	1.03	228	1.53							75	221				
TLES10KK.3	102H4038	LBP	73	205					126	0.98	255	1.43							89	250				
TLES4KTK	102H4436	LBP	18	74	123	154			40	0.83	96	1.49							22	91	151	189		
TLES5KTK	102H4536	LBP	28	99	159	196			57	0.93	126	1.49							34	121	194	240		
TLES6KTK	102H4636	LBP	31	112					66	0.95	140	1.44							38	136				
TLES7KTK	102H4736	LBP	40	130					77	0.95	163	1.41							49	158				
TLES8KTK	102H4836	LBP	48	149					89	0.95	188	1.40							59	182				
TLES8.7KTK.3	102H4834	LBP	58	178					107	0.98	224	1.49							71	217				
TLES10KTK.3	102H4050	LBP	73	205					126	1.06	255	1.54							89	250				
TLX4KK.3	102H4447	LBP	21	76					44	1.15	95	1.74							25	92				
TLX5.7KK.3	102H4647	LBP	37	115					70	1.28	143	1.85							46	140				
TLX6.5KK.3	102H4747	LBP	46	133					83	1.30	165	1.83							57	163				
TLX7.5KK.3	102H4847	LBP	55	157					98	1.32	195	1.86							67	192				
TLX8.7KK.3	102H4947	LBP	65	184					115	1.31	227	1.84							79	224				


R600a • 220-240 V • 50 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TLES4KK.3	102H4438	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES4.8KK.3	102H4538	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES5.7KK.3	102H4638	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES6.5KK.3	102H4738	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES7.5KK.3	102H4838	103N0011	103N0018	103N0016	103N0021	103N0050	117-7131	117-7132					103N1010	103N2010	
TLES8.7KK.3	102H4938	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES10KK.3	102H4038	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES4KTK	102H4436	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES5KTK	102H4536	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES6KTK	102H4636	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES7KTK	102H4736	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES8KTK	102H4836	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLES8.7KTK.3	102H4834	103N0011	103N0018										103N1010	103N2010	
TLES10KTK.3	102H4050	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLX4KK.3	102H4447			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLX5.7KK.3	102H4647			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLX6.5KK.3	102H4747			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
TLX7.5KK.3	102H4847			103N0016	103N0021	103N0050	117-7131	117-7132					103N1010	103N2010	
TLX8.7KK.3	102H4947			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						alt. connectors available	Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
57	1.18					*	1/20	4.01	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	1 7
74	1.30					*	1/10	4.78	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	1 7
91	1.32					*	1/10	5.70	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	1 2
108	1.31					*	1/10	6.49	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			2
126	1.32					*	1/10	7.48	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	2
147	1.33					*	1/8	8.67	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	2
168	1.26					*	1/7	10.13	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
55	1.10	127	1.87			*	1/20	3.86	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
77	1.22	165	1.83			*	1/10	5.08	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			1
89	1.23					*	1/10	5.70	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
103	1.23					*	1/10	6.49	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
119	1.22					*	1/10	7.76	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
143	1.27						1/8	8.67	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
168	1.36					*	1/7	10.13	187-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2
60	1.49					4	1/10	4.01	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	1
94	1.65					4	1/10	5.70	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	1 2
111	1.66					4	1/10	6.49	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	2
130	1.69					3	1/8	7.48	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	2
153	1.68					4	1/7	8.67	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0		X	2

TLES / TLX

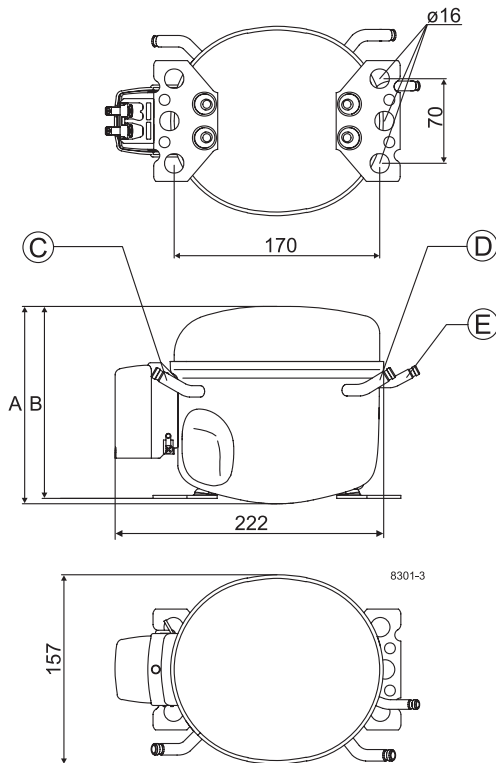


R600a • 220-240 V • 50 Hz • T-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]													
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15	
			Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP	Capacity	COP
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]
TLY4KK.3	102H4442	LBP	19	75					42	0.99	95	1.58					23	91										
TLY4.8KK.3	102H4542	LBP	28	94					55	1.06	119	1.62					34	115										
TLY5.7KK.3	102H4642	LBP	36	114					68	1.06	144	1.61					45	139										
TLY6.5KK.3	102H4742	LBP	46	135					82	1.10	170	1.63					56	165										
TLY7.5KK.3	102H4842	LBP	53	155					94	1.09	194	1.62					64	189										
TLY8.7KK.3	102H4942	LBP	65	182					112	1.16	227	1.69					79	222										
TLY10KK.3	102H4042	LBP	74	208					128	1.21	260	1.74					90	254										

R600a • 220-240 V • 50 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
TLY4KK.3	102H4442	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY4.8KK.3	102H4542	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY5.7KK.3	102H4642	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY6.5KK.3	102H4742	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY7.5KK.3	102H4842	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY8.7KK.3	102H4942	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010
TLY10KK.3	102H4042	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
57	1.29					4 *	1/20	4.01	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			1
74	1.37					4 *	1/10	4.78	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			1
91	1.37					4 *	1/10	5.70	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			1 2
110	1.42					4 *	1/10	6.49	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			2
126	1.41					4 *	1/10	7.48	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0			2
149	1.49					4 *	1/8	8.67	198-254 V, 50 Hz	S	163	159	6.2	6.2	5.0		X	2
170	1.55					4 *	1/7	10.13	198-254 V, 50 Hz	S	173	169	6.2	6.2	5.0			2

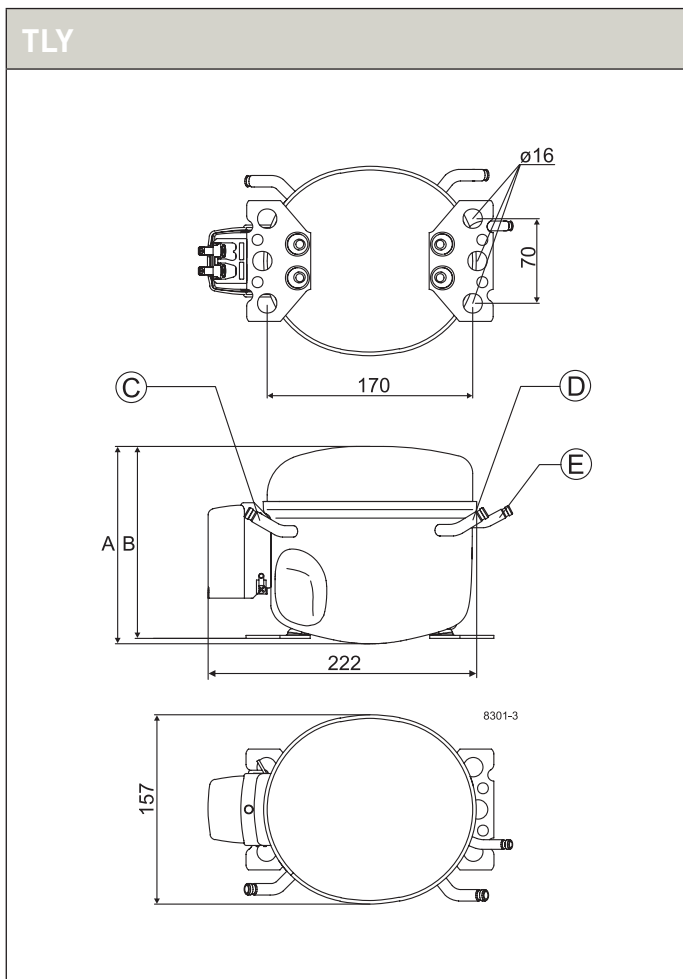

R600a • 220-240 V • 50 Hz • X-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	[W]		[W/W]		[W]		[W/W]		[W]		[W/W]	
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	
XV5.0KX 1000 rpm	108H5012	LBP	8	29	43	50			16	1.29	36	1.99			10	36	54	63					
XV5.0KX 1500 rpm	108H5012	LBP	9	47	72	84			25	1.35	59	2.02			12	58	89	104					
XV5.0KX 2500 rpm	108H5012	LBP	27	75	112	130			45	1.37	93	2.03			32	92	138	161					
XV5.0KX 4000 rpm	108H5012	LBP	34	127	196	230			67	1.28	161	1.89			41	155	240	282					
XV7.2KX 1000 rpm	108H7210	LBP	17	52	87	107			28	1.39	69	2.12			21	65	107	131					
XV7.2KX 2000 rpm	108H7210	LBP	31	105	168	203			57	1.41	135	2.06			39	129	206	249					
XV7.2KX 3000 rpm	108H7210	LBP	47	153	242				84	1.35	195	1.96			58	187	297						
XV7.2KX 4000 rpm	108H7210	LBP	62	192					106	1.31	247	1.92			76	236							
XV8.0KX 1000 rpm	108H7710	LBP	17	57	87	101			32	1.40	72	2.14			21	70	106	124					
XV8.0KX 1500 rpm	108H7710	LBP	27	88	131	154			52	1.46	109	2.14			33	108	160	188					
XV8.0KX 2500 rpm	108H7710	LBP	40	142	215				81	1.42	177	2.04			49	173	263						
XV8.0KX 4000 rpm	108H7710	LBP	65	214					122	1.33	270	1.94			80	262							

R600a • 220-240 V • 50 Hz • X-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
XV5.0KX	108H5012	Electronic unit 105N5022 (attached) - XV-AEO/Freq., inputs: Modbus, thermostat, frequency signal													
XV7.2KX	108H7210	Electronic unit 105N5052 (detached) - XV-Frequency, input: frequency signal													
XV8.0KX	108H7710														

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions							Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location / diameter [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C (I.D.)	Process D (O.D.)	Dis-charge E (O.D.)	Oil cooler F	alt. connectors available	
22	1.67	47	2.45				1/8	5.0	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			1 9
35	1.75	77	2.46				1/8	5.0	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			1 9
60	1.77	119	2.46				1/8	5.0	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			1 9
93	1.66	207	2.30				1/8	5.0	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			1 9
39	1.80	90	2.60				1/5	7.2	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
79	1.82	176	2.51				1/5	7.2	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
115	1.74	254	2.37				1/5	7.2	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
145	1.69						1/5	7.2	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
44	1.82	92	2.61				1/5	7.7	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
70	1.88	139	2.60				1/5	7.7	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
110	1.83	226	2.47				1/5	7.7	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2
165	1.72						1/5	7.7	160-264 V, 50 Hz *	S	97	91	6.2	6.0	3.2			2

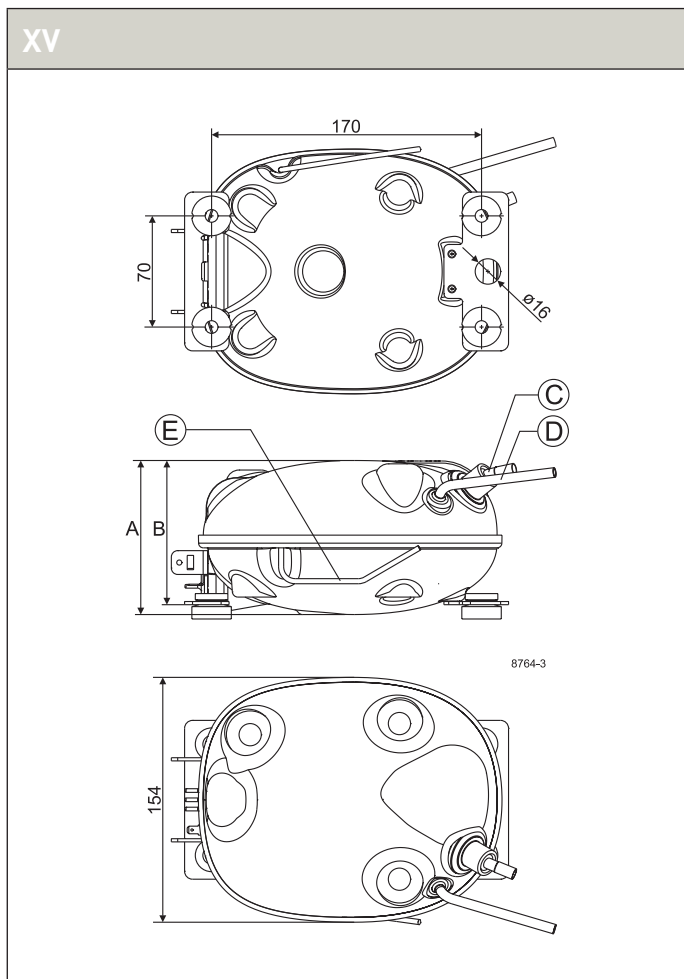

R600a • 220-240 V • 50 Hz • D-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]									
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15				
			-35	-15	-5	0	10	15																
			-35		-15		-5		0		10		15		-35		-15		-5		0		10	
DLE5.7KK	102H4696	LBP	42	124	186				75	1.24	154	1.73						51	152	227				
DLE7.5KK	102H4890	LBP	53	153					96	1.25	189	1.69						65	186					
DLE8.7KK	102H4950	LBP	63	179					112	1.23	226	1.68						76	219					
DLE9.4KK	102H4952	LBP	71	195					123	1.22	246	1.67						87	238					
DLE10KK	102H4082	LBP	78	216					138	1.23	271	1.68						95	264					
DLY7.5KK	102H4891	LBP	55	156					96	1.39	195	1.96						67	190					
DLY8.7KK	102H4951	LBP	66	183					114	1.37	226	1.93						81	223					
DLY9.4KK	102H4953	LBP	73	201					125	1.36	249	1.90						89	245					
DLY10KK	102H4083	LBP	74	217					133	1.32	274	1.78						91	265					
DLX4KK.1	102H3459	LBP	23	79					46	1.44	101	2.19						28	97					
DLX4.8KK.1	102H3559	LBP	30	104					60	1.47	131	2.20						36	127					
DLX5.7KK.1	102H3659	LBP	41	123					75	1.47	154	2.08						51	151					
DLX6.5KK.1	102H3759	LBP	44	131					80	1.49	164	2.11						54	161					
DLX7.5KK.1	102H4859	LBP	52	156					95	1.49	195	2.10						64	191					
DLX8.7KK.1	102H4959	LBP	62	186					113	1.49	232	2.10						76	227					
DLX9.4KK.1	102H4159	LBP	69	207					126	1.48	259	2.08						85	253					
DLX10KK.1	102H4059	LBP	76	227					138	1.47	284	2.07						93	277					


R600a • 220-240 V • 50 Hz • D-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
DLE5.7KK	102H4696			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLE9.4KK	102H4890			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLE8.7KK	102H4950			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLE9.4KK	102H4952			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLE10KK	102H4082			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLY7.5KK	102H4891			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLY8.7KK	102H4951			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLY9.4KK	102H4953			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLY10KK	102H4083			103N0016	103N0021	103N0050		117-7119					103N1010	103N0491	
DLX4KK.1	102H3459			103N0016	103N0021	103N0055		117-7136					103N1010	103N0491	
DLX4.8KK.1	102H3559			103N0016	103N0021	103N0055		117-7136					103N1010	103N0491	
DLX5.7KK.1	102H3659			103N0016	103N0021	103N0055		117-7136					103N1010	103N0491	
DLX6.5KK.1	102H3759			103N0016	103N0021	103N0055		117-7136					103N1010	103N0491	
DLX7.5KK.1	102H4859			103N0016	103N0021	103N0055		117-7139					103N1010	103N0491	
DLX8.7KK.1	102H4959			103N0016	103N0021	103N0055		117-7139					103N1010	103N0491	
DLX9.4KK.1	102H4159			103N0016	103N0021	103N0055		117-7140					103N1010	103N0491	
DLX10KK.1	102H4059			103N0016	103N0021	103N0055		117-7132					103N1010	103N0491	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
101	1.59	196	2.09			*	1/10	5.70	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	1 2 9
128	1.59					*	1/10	7.48	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
148	1.56					*	1/7	8.67	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
163	1.55					*	1/7	9.38	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
182	1.56					*	1/6	10.14	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
128	1.78					4	1/10	7.48	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
152	1.75					4	1/7	8.67	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
167	1.73					4	1/7	9.38	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
177	1.67					4	1/6	10.14	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
62	1.86					2	1/10	4.01	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	1 9
81	1.90					2	1/10	4.78	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	1 9
100	1.89					2	1/10	5.70	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	1 2 9
107	1.91					2	1/10	6.49	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
127	1.91					2.5	1/10	7.48	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
151	1.91					2.5	1/7	8.67	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9
168	1.89					3.5	1/7	9.38	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0			2 9
185	1.89					3	1/6	10.14	198-254 V, 50 Hz	S	175	169	6.2	4.5	5.0		X	2 9

DLE / DLY / DLX

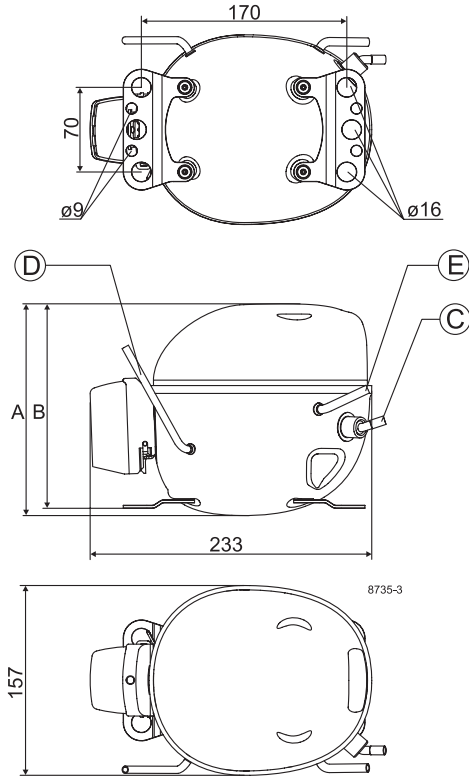

R600a • 220-240 V • 50 Hz • N-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]							
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35		-15		0		15	
			-35	-15	-5	0	10	15							-35	-15	-5	0	10	15		
NLE10KK.4	105H6867	LBP	74	207				128	1.19	257	1.60			90	252							
NLE11KK.4	105H6952	LBP	81	232				143	1.19	290	1.62			100	283							
NLE13KK.4	105H6959	LBP	99	274				170	1.18	340	1.59			121	334							
NLE15KK.4	105H6968	LBP	110	307				190	1.20	382	1.63			134	374							
NLE9KTK	105H6848	LBP	54	166				98	1.03	211	1.57			66	202							
NLE11KTK	105H6948	LBP	73	206				127	1.03	261	1.47			88	251							
NLE15KTK	105H6946	LBP	93	280				169	1.00	351	1.49			114	341							
NLE11KTK.2	105H6173	LBP	84	242				149	1.18	302	1.72			102	295							
NLE13KTK.2	105H6929	LBP	96	277				171	1.18	345	1.73			117	338							
NLE15KTK.2	105H6966	LBP	106	314				190	1.19	395	1.72			129	384							
NLE15MKK	105H6533	MBP		308	480	588		186	1.16	387	1.68	713	2.20		376	586	719					
NLU8.0KK.1	105H6008	LBP	51	158				95	1.52	198	2.12			63	193							
NLU10KK.1	105H6131	LBP	71	219				131	1.55	274	2.16			86	267							
NLU11KK.1	105H6132	LBP	81	247				149	1.55	309	2.14			99	301							
NLU13KK.1	105H6372	LBP	93	285				172	1.55	357	2.15			114	348							
NLU15KK.1	105H6553	LBP	105	320				194	1.54	400	2.13			129	390							
NLU11KTK.1	105H6133	LBP	83	253				153	1.45	317	2.02			102	309							
NLU13KTK.1	105H6381	LBP	95	285				173	1.46	356	2.02			116	348							
NLU15KTK.1	105H6554	LBP	106	321				195	1.45	401	2.00			130	392							

R600a • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NLE10KK.4	105H6867	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE11KK.4	105H6952	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE13KK.4	105H6959	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE15KK.4	105H6968	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE9KTK	105H6848	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010	
NLE11KTK	105H6948	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010	
NLE15KTK	105H6946	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010	
NLE11KTK.2	105H6173	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE13KTK.2	105H6929	103N0011	103N0018	103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLE15KTK.2	105H6966	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010	
NLE15MKK	105H6533	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119					103N1010	103N2010	
NLU8.0KK.1	105H6008				103N0021	103N0055		117-7139					103N1010	103N2010	
NLU10KK.1	105H6131				103N0021	103N0055		117-7139					103N1010	103N2010	
NLU11KK.1	105H6132				103N0021	103N0055		117-7139					103N1010	103N2010	
NLU13KK.1	105H6372				103N0021	103N0055		117-7132					103N1010	103N2010	
NLU15KK.1	105H6553				103N0021	103N0055		117-7132					103N1010	103N2010	
NLU11KTK.1	105H6133				103N0021	103N0055		117-7132					103N1010	103N2010	
NLU13KTK.1	105H6381				103N0021	103N0055		117-7129					103N1010	103N2010	
NLU15KTK.1	105H6554				103N0021	103N0055		117-7119					103N1010	103N2010	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [µF]	Power [HP]	Displacement [cm³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F	
170	1.51					*	1/6	10.09	198-254 V, 50 Hz	S	190	183	6.2	6.2	5.0		2
190	1.52					*	1/5	11.15	198-254 V, 50 Hz	S	190	183	6.2	6.2	5.0		2
226	1.50					*	1/5	13.25	198-254 V, 50 Hz	S	190	183	6.2	6.2	5.0		2
253	1.53					*	1/4	14.65	198-254 V, 50 Hz	S	197	190	6.2	6.2	5.0		2
131	1.33					*	1/8	8.35	187-254 V, 50 Hz *	S	197	190	6.2	6.2	5.0		2
168	1.31					*	1/7	11.15	187-254 V, 50 Hz *	S	197	190	6.2	6.2	5.0		2
226	1.28					*	1/5	14.65	187-254 V, 50 Hz	S	197	190	6.2	6.2	5.0		2
199	1.51					*	1/5	11.15	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
227	1.52					*	1/5	13.25	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
254	1.52					*	1/4	14.65	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
248	1.49	500	2.05	868	2.58	*	1/4	14.65	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2 3
127	1.94					2.5	1/10	8.05	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0	X	2
176	1.98					2.5	1/6	10.09	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
200	1.97					2.5	1/5	11.15	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
230	1.98					3	1/5	13.25	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
259	1.96					3	1/4	14.65	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
205	1.85					3	1/5	11.15	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
231	1.87					5	1/5	13.25	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2
260	1.85					4	1/4	14.65	187-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		2

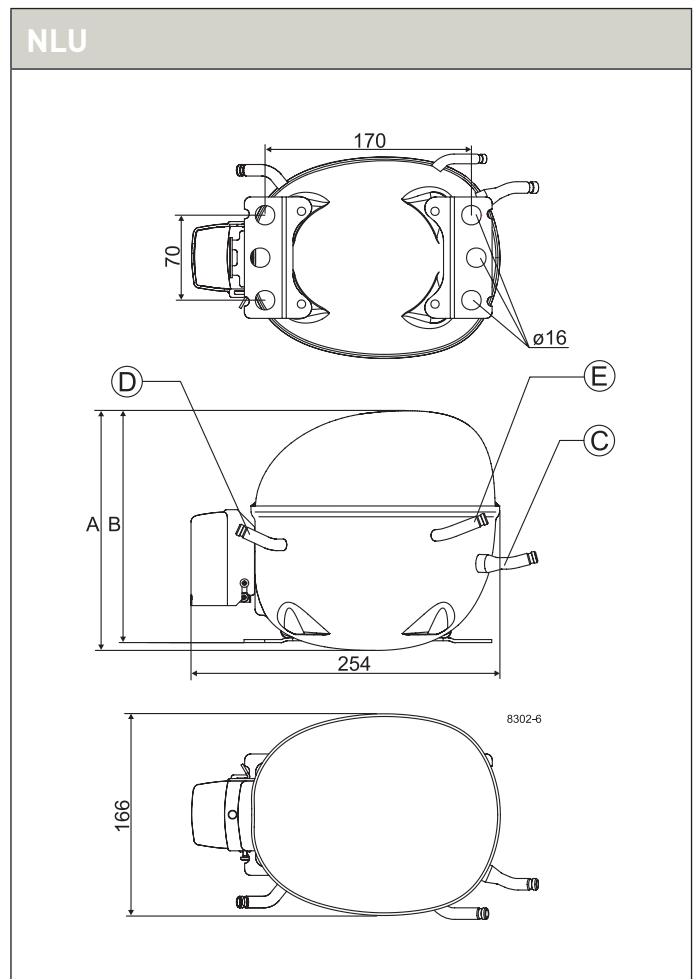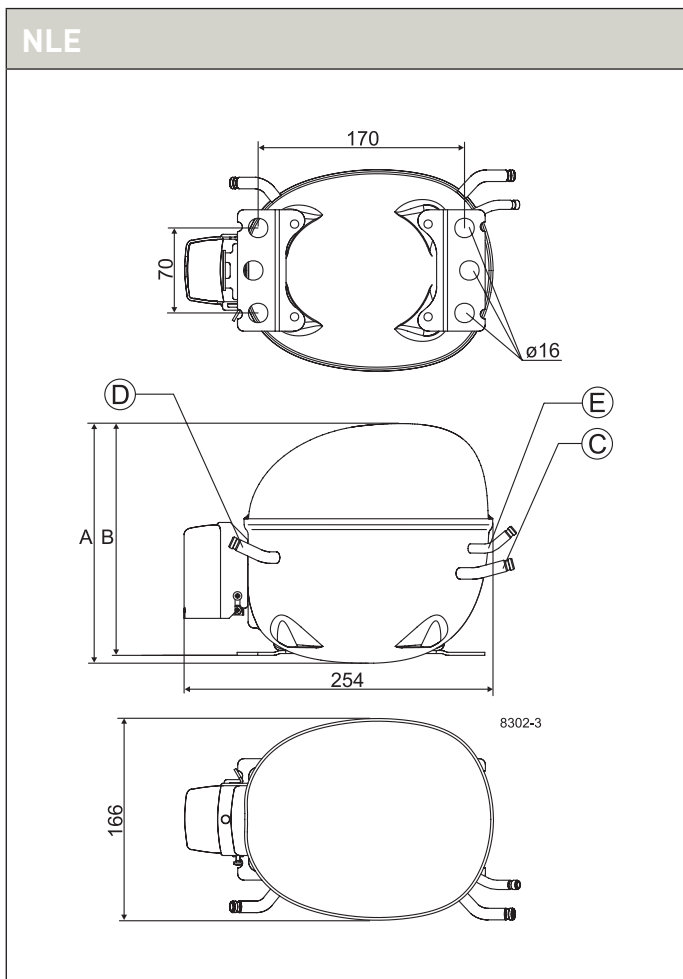


R600a • 220-240 V • 50 Hz • N-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
			-35	-15	-5	0	10	15												
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]	
NLX10KK.1	105H6104	LBP	67	215					128	1.36	270	1.93			82	262				
NLX13KK.1	105H6304	LBP	91	276					167	1.37	345	1.91			111	337				
NLX15KK.1	105H6502	LBP	99	308					185	1.34	387	1.87			121	377				
NLX8.0KK.2	105H6010	LBP	52	167					99	1.47	210	2.08			64	204				
NLX8.8KK.2	105H6011	LBP	62	187					113	1.49	234	2.03			76	228				
NLX10KK.2	105H6101	LBP	74	217					133	1.49	271	2.01			91	265				
NLX11KK.2	105H6970	LBP	85	240					148	1.48	298	1.99			104	293				
NLX13KK.2	105H6300	LBP	93	271					167	1.47	338	1.99			115	332				
NLX15KK.2	105H6977	LBP	110	309					192	1.48	384	1.99			135	377				
NLX10KK.3	105H6106	LBP	73	216					131	1.47	269	2.00			88	263				
NLX11KK.3	105H6184	LBP	79	237					147	1.47	300	2.00			97	289				
NLX13KK.3	105H6306	LBP	93	283					168	1.45	356	1.99			113	345				
NLX15KK.3	105H6506	LBP	109	317					190	1.45	403	1.99			132	389				

R600a • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NLX10KK.1	105H6104			103N0016	103N0021	103N0050	117-7131	117-7132					103N1010	103N2010	
NLX13KK.1	105H6304			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLX15KK.1	105H6502			103N0016	103N0021	103N0050		117-7136					103N1010	103N2010	
NLX8.0KK.2	105H6010			103N0016	103N0021	103N0050		117-7132					103N1010	103N2010	
NLX8.8KK.2	105H6011			103N0016	103N0021	103N0050		117-7136					103N1010	103N2010	
NLX10KK.2	105H6101			103N0016	103N0021	103N0050		117-7136					103N1010	103N2010	
NLX11KK.2	105H6970			103N0016	103N0021	103N0050		117-7136					103N1010	103N2010	
NLX13KK.2	105H6300			103N0016	103N0021	103N0050		117-7132					103N1010	103N2010	
NLX15KK.2	105H6977			103N0016	103N0021	103N0050	117-7117	117-7119					103N1010	103N2010	
NLX10KK.3	105H6106				103N0021	103N0050		117-7140					103N1010	103N2010	
NLX11KK.3	105H6184				103N0021	103N0050		117-7119					103N1010	103N2010	
NLX13KK.3	105H6306				103N0021	103N0050		117-7119					103N1010	103N2010	
NLX15KK.3	105H6506				103N0021	103N0050		117-7140					103N1010	103N2010	

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					Oil cooler alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	F		
172	1.74					3	1/6	10.09	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
224	1.75					4	1/5	13.25	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
248	1.71					2	1/4	14.65	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
133	1.88					3	1/8	8.05	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
151	1.89					2	1/7	8.76	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
178	1.89					2	1/6	10.09	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
198	1.88					2	1/5	11.15	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
222	1.87					3	1/5	13.25	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
255	1.88					4	1/4	14.65	198-254 V, 50 Hz	S	203	197	8.2	6.2	6.2		X	2
175	1.87					4	1/6	10.09	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
195	1.86					4	1/6	11.15	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0		X	2
225	1.85					4	1/5	13.25	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2
254	1.85					4	1/4	14.65	198-254 V, 50 Hz	S	203	197	6.2	6.2	5.0			2

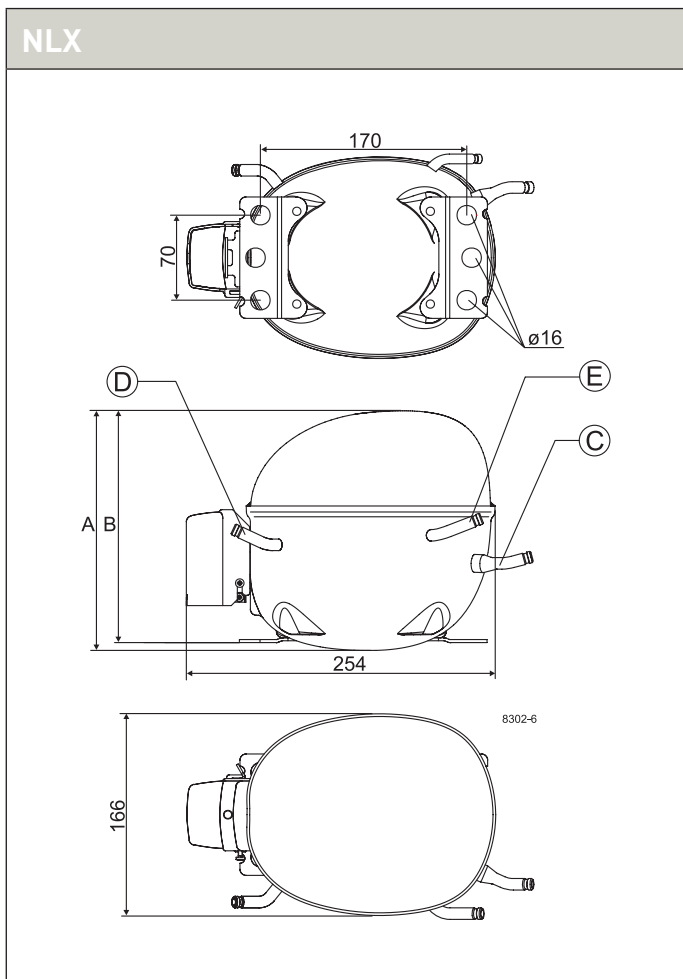

R600a • 220-240 V • 50 Hz • KAPPA


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
			-35	-15	-5	0	10	15												
HMK80AA	15950000	LBP	55	170				102	1.18	211	1.68			67	207					
HMK95AA	15460700	LBP	67	207				125	1.20	257	1.72			81	253					
HMK12AA	16236200	LBP	82	239				149	1.21	292	1.66			100	291					
HTK55AA	16122700	LBP	32	119				69	1.20	150	1.79			39	146					
HTK70AA	16106100	LBP	44	150				87	1.26	185	1.85			54	182					
HTK80AA	16068300	LBP	55	170				102	1.26	212	1.83			67	207					
HTK95AA	16068200	LBP	71	207				126	1.29	258	1.82			86	252					
HTK12AA	16111600	LBP	82	239				149	1.29	292	1.77			100	291					
HKK55AA	16124400	LBP	32	120				69	1.37	150	2.00			39	146					
HKK70AA	16124500	LBP	44	148				87	1.40	186	1.98			54	181					
HKK80AA	16072100	LBP	55	170				102	1.40	212	1.99			67	207					
HKK95AA	16049700	LBP	69	207				126	1.42	256	1.95			84	252					
HKK12AA	16065900	LBP	82	239				149	1.42	292	1.93			100	291					
HXX55AA	15650400	LBP	36	122				72	1.45	152	2.00			44	149					
HXX70AA	15690400	LBP	47	149				88	1.47	186	2.02			57	181					
HXX80AA	15621800	LBP	58	173				105	1.50	214	2.05			71	210					
HXX95AA	15592900	LBP	73	209				129	1.51	258	2.05			89	255					
HXK12AA	15593100	LBP	83	245				152	1.50	300	2.04			101	299					
HZK95AA	16313100	LBP	73	208				128	1.58	257	2.15			89	254					
HZK12AA	16312900	LBP	82	244				152	1.57	299	2.14			101	298					
HKK12AT	16173800	LBP	82	245				152	1.42	300	1.97			100	299					

R600a • 220-240 V • 50 Hz • KAPPA • Electrical Equipment

Compressor	Code number	Run capacitor (RC)		PTC / E- Starter	Standard terminal board with external protector	alt. electrics available (protectors, RC, starters, connectors)	Terminal board cover	Terminal board cover V0	Evaporation tray	
		µF	optional / compulsory						vertical	horizontal
HMK80AA	15950000			PTC	Z_F5	X				
HMK95AA	15460700			PTC	Z_F5	X				
HMK12AA	16236200			PTC	Z_FP	X				
HTK55AA	16122700	2	optional	PTC	Z_F0	X				
HTK70AA	16106100	3	optional	PTC	Z_F7	X				
HTK80AA	16068300	3	optional	PTC	Z_FC	X				
HTK95AA	16068200	4	optional	PTC	Z_FC	X				
HTK12AA	16111600	4	optional	PTC	Z_F9	X				
HKK55AA	16124400	2.5	compulsory	PTC	Z_FF	X				
HKK70AA	16124500	3	compulsory	PTC	Z_F6	X				
HKK80AA	16072100	3	compulsory	PTC	Z_F4	X	157595__	106364__	113188__	
HKK95AA	16049700	4	compulsory	PTC	Z_FC	X				
HKK12AA	16065900	4	compulsory	PTC	Z_FP	X				
HXX55AA	15650400	3	compulsory	E- Starter	Z_F6	X				
HXX70AA	15690400	3	compulsory	E- Starter	Z_F6	X				
HXX80AA	15621800	3	compulsory	E- Starter	Z_F4	X				
HXX95AA	15592900	4	compulsory	E- Starter	Z_F5	X				
HXK12AA	15593100	4	compulsory	E- Starter	Z_FP	X				
HZK95AA	16313100	4	compulsory	E- Starter	Z_F5	X				
HZK12AA	16312900	4	compulsory	E- Starter	Z_FP	X				
HKK12AT	16173800	4	compulsory	PTC	Z_FV	X				

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]	Connectors location / diameter [mm]				alt. connectors available		
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP							Suction C [I.D.]	Process D [O.D.]	Dis- charge E [I.D.]	Oil cooler F			
136	1.51						1/7	8.10	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15			1 2 3 6
168	1.55						1/7	9.60	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15			1 2 3 6
199	1.54						1/6	11.20	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15			1 2 3 6
93	1.55					2 *	1/10	5.60	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
118	1.62					3 *	1/10	6.60	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
136	1.62					3 *	1/8	8.10	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
168	1.65					4 *	1/7	9.60	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3
199	1.64					4 *	1/5	11.20	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3
94	1.77					2.5	1/10	5.60	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
118	1.80					3	1/10	6.60	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
136	1.80					3	1/8	8.10	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
169	1.81					4	1/7	9.60	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3
198	1.81					4	1/5	11.20	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3
98	1.85					3	1/10	5.60	187-264 V, 50 Hz	S	159	165.5	6.15	6.00	5.15		X	1 2 3
119	1.88					3	1/10	6.60	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3 6
141	1.91					3	1/8	8.10	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3 6
172	1.92					4	1/6	9.60	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3 6
203	1.91					4	1/5	11.10	187-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3 6
171	2.01					4	1/6	9.60	187-264 V, 50 Hz	S	170	176.5	6.15	6.00	5.15		X	1 2 3 6
202	2.00					4	1/5	11.10	187-264 V, 50 Hz	S	170	176.5	6.15	6.00	5.15		X	1 2 3 6
203	1.81					4	1/5	11.10	170-264 V, 50 Hz	S	167	173.5	6.15	6.00	5.15		X	1 2 3

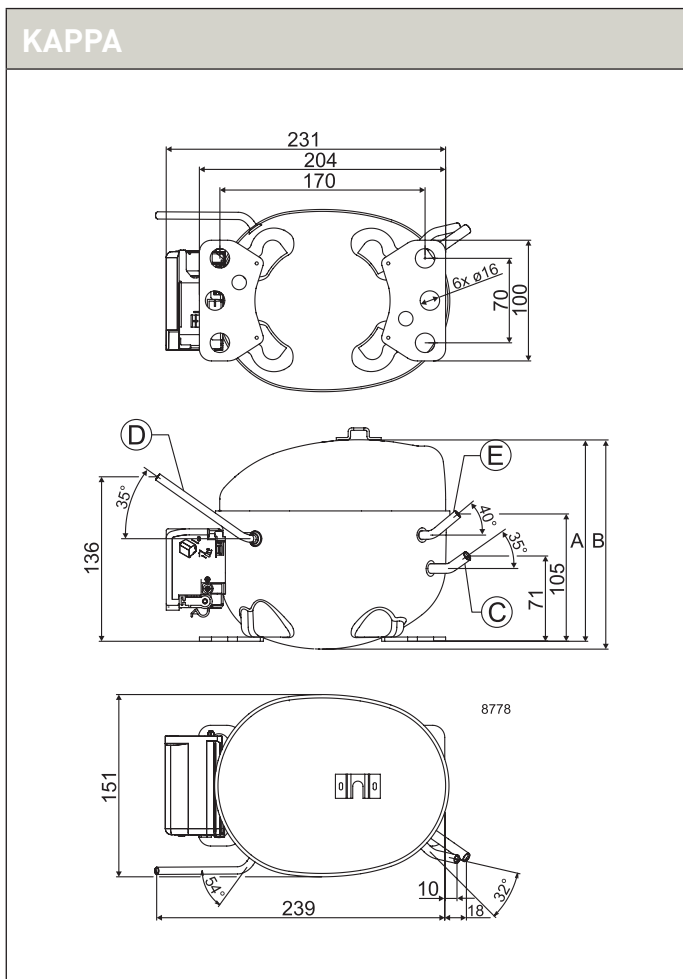

R600a • 220-240 V • 50 Hz • DELTA


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
			-35	-15	-5	0	10	15												
HTD30AA	16250500	LBP	14	62	98				34	1.17	79	1.81			17	76	120			
HTD35AA	16250700	LBP	20	73	115				41	1.19	93	1.83			24	90	141			
HTD40AA	16250900	LBP	25	86	135				50	1.22	109	1.87			31	106	165			
HTD45AA	16251100	LBP	30	104	159				61	1.24	130	1.78			37	127	194			
HTD55AA	16251300	LBP	40	126	189				76	1.27	156	1.83			49	154	231			
HTD60AA	16255700	LBP	50	144	221				87	1.27	180	1.80			62	176	269			
HXD30AA	16260300	LBP	14	62	98				34	1.32	79	2.03			17	76	120			
HXD35AA	16260700	LBP	20	73	115				41	1.33	93	2.04			24	90	141			
HXD40AA	16261700	LBP	25	86	135				50	1.36	109	2.06			31	106	165			
HXD45AA	16261900	LBP	30	104	159				61	1.40	130	2.02			37	127	194			
HXD55AA	16257500	LBP	40	126	189				76	1.44	156	2.09			49	154	231			
HXD60AA	16302500	LBP	48	145					88	1.43	180	2.04			59	176				

R600a • 220-240 V • 50 Hz • DELTA • Electrical Equipment

Compressor	Code number	Run capacitor (RC)		PTC / E-Starter	Standard terminal board with external protector	Terminal board cover (small) delivered seperately	Adapter plate	Evaporation tray
		µF	optional / compulsory					horizontal
HTD30AA	16250500	1	optional	PTC	B_E7			
HTD35AA	16250700	1.5	optional	PTC	B_E7			
HTD40AA	16250900	2	optional	PTC	B_E6			
HTD45AA	16251100	2	optional	PTC	B_E4			
HTD55AA	16251300	2	optional	PTC	B_E4			
HTD60AA	16255700	2	optional	PTC	B_E4			
HXD30AA	16260300	1	compulsory	E-Starter	B_E7	155471__	157008__	162531__
HXD35AA	16260700	1.5	compulsory	E-Starter	B_E7			
HXD40AA	16261700	2	compulsory	E-Starter	B_E6			
HXD45AA	16261900	2	compulsory	E-Starter	B_E6			
HXD55AA	16257500	2	compulsory	E-Starter	B_E6			
HXD60AA	16302500	2	compulsory	E-Starter	B_E4			

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location / diameter [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C (I.D.)	Process D (O.D.)	Dis- charge E (I.D.)	Oil cooler F		alt. connectors available
46	1.53	101	2.18			1 *	1/25	3.00	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
56	1.55	119	2.19			1.5 *	1/20	3.50	187-264 V, 50 Hz	S	133		6.20	6.00	5.00		X	112 3 5 6 7 9
68	1.58	140	2.24			2 *	1/10	4.00	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
83	1.60	165	2.11			2 *	1/10	4.80	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
103	1.63	197	2.18			2 *	1/10	5.50	187-264 V, 50 Hz	S	133		6.20	6.00	5.00		X	112 3 5 6 7 9
117	1.63	228	2.13			2 *	1/10	6.20	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
46	1.72	101	2.43			1	1/25	3.00	187-264 V, 50 Hz	S	133		6.20	6.00	5.00		X	112 3 5 6 7 9
56	1.73	119	2.44			1.5	1/20	3.50	187-264 V, 50 Hz	S	133		6.20	6.00	5.00		X	112 3 5 6 7 9
68	1.76	140	2.46			2	1/10	4.00	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
83	1.80	165	2.38			2	1/10	4.80	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9
103	1.85	197	2.49			2	1/10	5.50	187-264 V, 50 Hz	S	133		6.20	6.00	5.00		X	112 3 5 6 7 9
117	1.83					2	1/10	6.20	187-264 V, 50 Hz	S	133		6.20	6.00	5.00			112 3 5 6 7 9

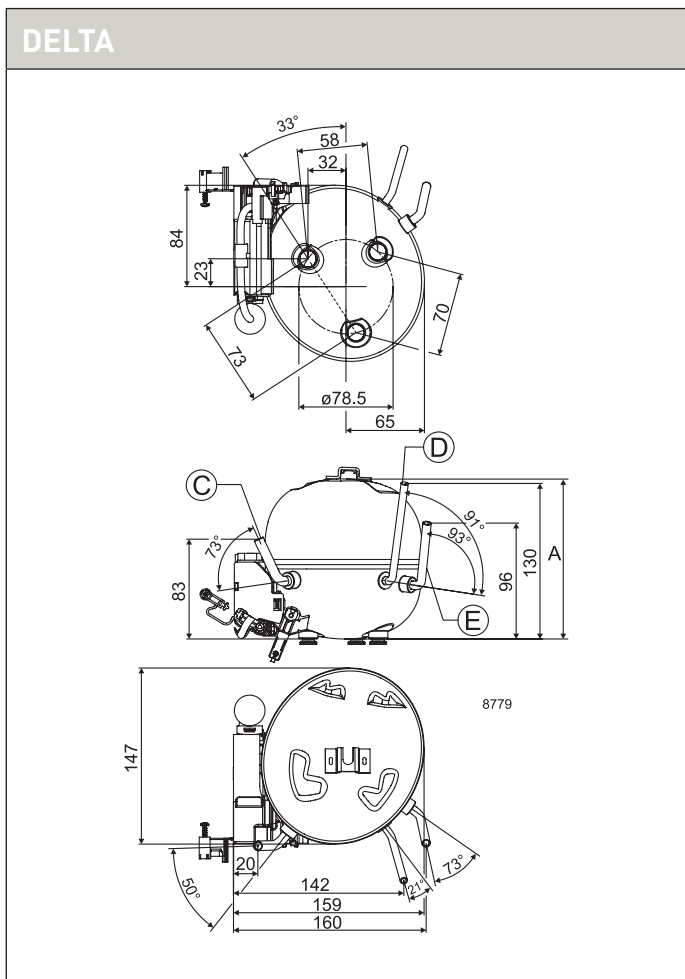

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R404A/R507

220-240 V | 50 Hz



T-Series	100-101
N-Series	102-103
F-Series	104-105
S-Series	106-109
G-Series	110-111

Chemical formula

R404A: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3 / \text{CH}_2\text{FCF}_3$
 R507: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3$

Typelabel

Typelabel stripe colour: Lilac
 Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSCR: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
 O = Oil cooling
 F_1 = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
 F_2 = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
 LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
 To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
 HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
 • Compressor restart possible after a few seconds
 • Operational wattage loss reduced by 2 watt
 • PTC protection screen not needed (surface temp. < 82 °C)
 • Temperature resistant up to min. +60 °C
 • Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
 1 Watt = 3.41 Btu/h





R404A/R507 • 220-240 V • 50 Hz • T-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]
TL4CL	102U2071	LBP	84	230	352				87	0.80	248	1.19			75	240	391			
TL4.5CLX	102U2111	LBP	106	294					107	0.74	318	1.19			102	302				
TL4DL	102U2038	M/HBP		229	349	432	631				243	1.14	395	1.38		227	363	455	672	

R404A/R507 • 220-240 V • 50 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TL4CL	102U2071								117U6000	117U5014			103N1010	103N2010	
TL4.5CLX	102U2111								117U6001	117U5014			103N1010	103N2010	
TL4DL	102U2038								117U6001	117U5014			103N1010	103N2010	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F	
152	1.03	317	1.44				1/7	3.86	198-254 V, 50 Hz	F2	173	169	6.2	6.2	5.0		4
198	1.05						1/6	4.63	198-254 V, 50 Hz	F2	173	169	6.2	6.2	5.0		4 6
		293	1.30	531	1.88		1/6	3.86	198-254 V, 50 Hz	F2	173	169	6.2	6.2	5.0		10 11

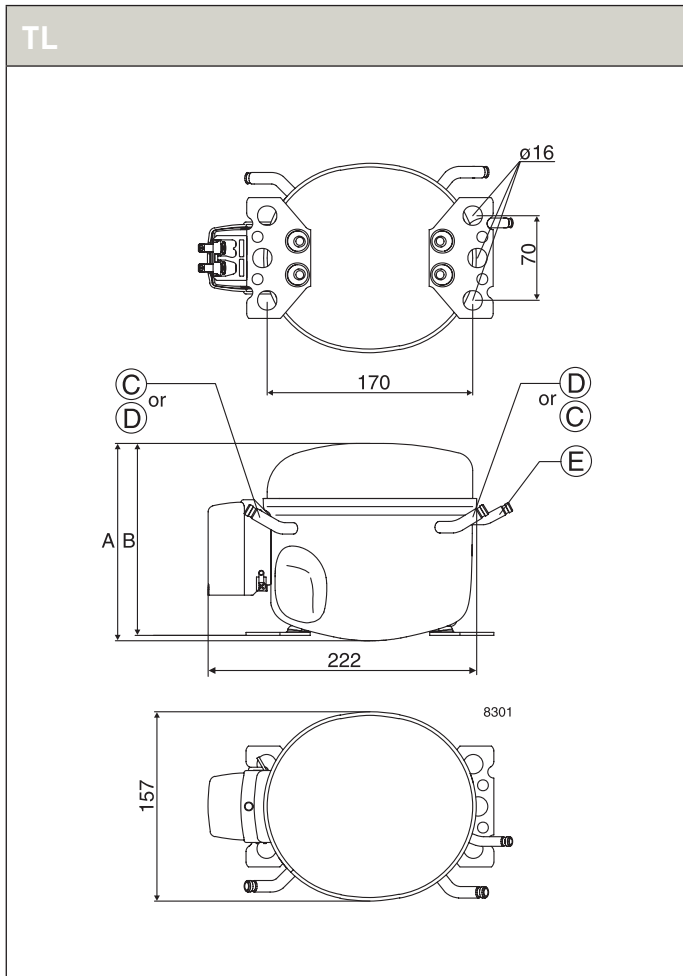

R404A/R507 • 220-240 V • 50 Hz • N-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]							
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C											
			Cooling capacity		COP				Cooling capacity		COP		Cooling capacity		COP							
			-35	-15	-5	0	10	15	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	-35	-15	-5	0	10	15
NF7MLX	105F3720	MBP		511	777	940	1336			551	1.29	861	1.58		548	852	1040	1506				
NL7CLX	105F3710	LBP	199	536	796			195	0.89	570	1.42			201	577	878						
NL8.4CLX	105F3800	LBP	216	583	866			212	0.87	620	1.37			218	627	955						
NL6.1MLX	105F3611	MBP		425	650	789				460	1.40	722	1.72		455	712	870					

R404A/R507 • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NF7MLX	105F3720								117U4139	117U5018			117U0349	117U1021	
NL7CLX	105F3710								117U6002	117U5015			103N1010	103N2010	
NL8.4CLX	105F3800								117U6003	117U5015			103N1010	103N2010	
NL6.1MLX	105F3611								117U6022	117U5015			103N1010	103N2011	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]	Connectors location/I.D. [mm]				Oil cooler alt. connectors available		
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]							Suction C	Process D	Dis-charge E	Oil cooler F			
		695	1.54	1191	2.20		1/2	7.27	187-254 V, 50 Hz *	F2	203	197	9.7	6.5	6.5		X	10 11
389	1.32	718	1.65				1/3	7.27	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2		X	4 6
423	1.28	781	1.60				1/2	7.27	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2			4 6
291	1.14	580	1.67	998	2.40		1/3	6.13	187-254 V, 50 Hz *	F2	203	197	8.2	6.5	6.5			10 11

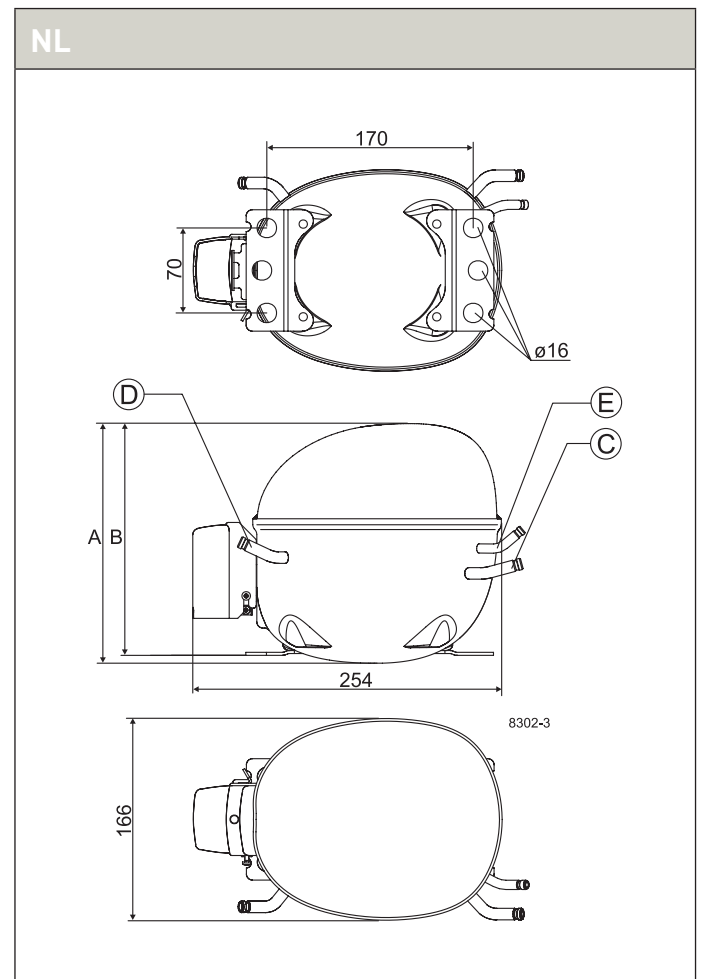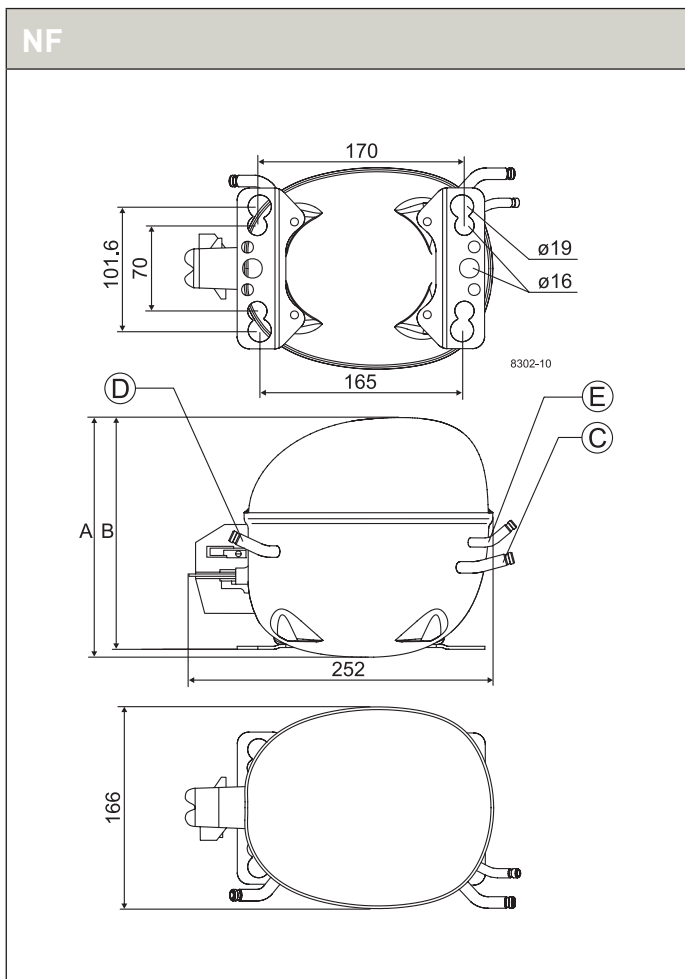

R404A/R507 • 220-240 V • 50 Hz • F-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]							
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C											
			Cooling capacity		COP				Cooling capacity		COP		Cooling capacity		COP							
			-35	-15	-5	0	10	15	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	-35	-15	-5	0	10	15
FR6CL	103U2670	LBP	145	383	578				143	0.75	410	1.10			149	394	606					
FR7.5CL	103U2790	LBP	154	417	627				155	0.76	447	1.07			158	433	658					
FR8.5CL	103U2890	LBP	168	468					173	0.74	501	1.01			171	492	0					
FR6DL	103U2680	M/HBP		385	576	698	999				409	1.10	626	1.22		404	600	731	1059			

R404A/R507 • 220-240 V • 50 Hz • F-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
FR6CL	103U2670								117U6015	117U5015			103N1010	103N2010	
FR7.5CL	103U2790								117U6016	117U5015			103N1010	103N2010	
FR8.5CL	103U2890								117U6010	117U5015			103N1010	103N2010	
FR6DL	103U2680								117U6010	117U5015			103N1010	103N2010	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		
268	1.04	494	1.23				1/4	6.23	198-254 V, 50 Hz	F2	196	191	8.2	6.2	6.2		X	4
294	1.03	538	1.19				1/4	6.93	198-254 V, 50 Hz	F2	196	191	8.2	6.2	6.2			4
333	0.98						1/3	7.95	198-254 V, 50 Hz	F2	196	191	8.2	6.2	6.2		X	4
		491	1.24	838	1.63		1/4	6.23	198-254 V, 50 Hz	F2	196	191	8.2	6.2	6.2			10 11

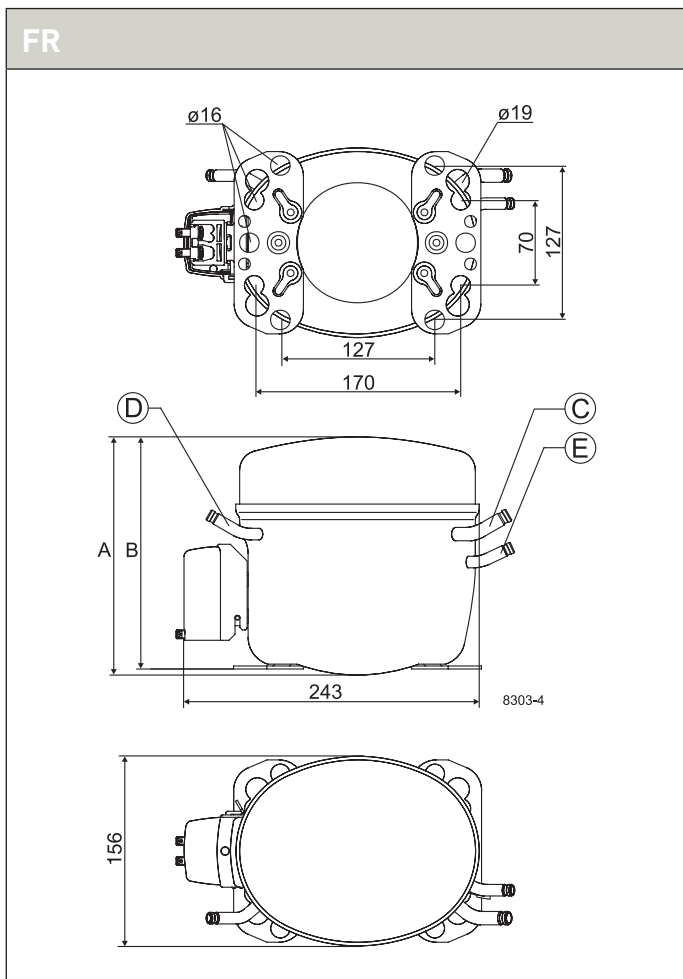

R404A/R507 • 220-240 V • 50 Hz • S-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15			
			-35	-15	-5	0	10	15															
			-35		-15		-5		0		10		15		-35		-15		-5		0		10
SC10CL	104L2523	LBP	168	634	991				183	0.70	694	1.24			132	664	1080						
SC12CL	104L2623	LBP	237	835	1292				262	0.78	909	1.32			165	859	1399						
SC15CL	104L2853	LBP	299	988	1458				329	0.76	1048	1.26			180	1102	1680						
SC18CL	104L2123	LBP	395	1154	1735				405	0.86	1236	1.31			375	1222	1884						
SC21CL	104L2322	LBP	455	1306					472	0.87	1393	1.34			442	1388							
SC10CLX	104L2533	L/MBP	166	625	977	1190			180	0.65	685	1.28	1096	1.53	130	655	1065	1318					
SC12CLX.2	104L2697	LBP	294	834					298	0.79	890	1.28			278	900							
SC15CLX.2	104L2896	LBP	358	1017					364	0.81	1086	1.32			339	1098							
SC18CLX.2	104L2197	LBP	439	1245					446	0.83	1329	1.33			415	1345							
SC10DL	104L2525	M/HBP		611	968	1192	1747	2085			673	1.33	1100	1.64		645	1053	1302	1919	2299			
SC12DL	104L2625	M/HBP		806	1279	1565	2258	2674			892	1.36	1441	1.70		866	1409	1731	2512	2989			
SC15DL	104L2856	M/HBP		964	1493	1825	2652	3156			1047	1.38	1682	1.71		1036	1643	2015	2933	3498			
SC15DLX.2	104L2871	M/HBP		983	1504	1824	2604	3071			1063	1.37	1669	1.70		1056	1648	2012	2912	3464			
SC10MLX	104L2506	MBP		687	1051	1278					742	1.36	1162	1.64		723	1129	1382					
SC12MLX	104L2606	MBP		838	1272	1542					900	1.38	1401	1.64		887	1371	1673					
SC15MLX	104L2869	MBP		1038	1574	1909					1114	1.36	1752	1.61		1119	1720	2105					
SC18MLX	104L2139	MBP		1210	1832	2220					1299	1.43	2037	1.70		1307	2004	2450					
SC18MLX.3	104L2146	MBP		1266	1898	2292					1351	1.46	2109	1.71		1386	2100	2556					
SC10/10CL	104L4087	LBP	336	1268	1981				365	0.70	1389	1.24			264	1329	2160						
SC12/12CL	104L4088	LBP	475	1670	2583				524	0.78	1818	1.32			331	1717	2798						
SC15/15CL	104L4089	LBP	599	1976	2916				657	0.76	2097	1.26			361	2205	3361						
SC18/18CL	104L4090	LBP	789	2307	3469				810	0.86	2472	1.31			749	2443	3768						
SC21/21CL	104L4094	LBP	910	2613					945	0.87	2787	1.34			885	2776							

R404A/R507 • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
SC10CL	104L2523								117U6003	117U5017			103N1004	103N2009	
SC12CL	104L2623								117U6005	117U5017			103N1004	103N2009	
SC15CL	104L2853								117U6019	117U5017			103N1004	103N2009	
SC18CL	104L2123									117U5373	117-7027		103N1004	103N2009	
SC21CL	104L2322									117U5373	117-7027		103N1004	103N2009	
SC10CLX	104L2533								117U6005	117U5017			103N1004	103N2008	
SC12CLX.2	104L2697								117U6019	117U5017			103N1004	103N2008	
SC15CLX.2	104L2896								117U6019	117U5017			103N1004	103N2009	
SC18CLX.2	104L2197								117U6013	117U5012			103N1004	103N2009	
SC10DL	104L2525								117U6005	117U5017			103N1004	103N2009	
SC12DL	104L2625								117U6019	117U5017			103N1004	103N2009	
SC15DL	104L2856									117U5373	117-7029		103N1004	103N2009	
SC15DLX.2	104L2871								117U6019	117U5017			103N1004	103N2009	
SC10MLX	104L2506								117U6011	117U5017			103N1004	103N2008	
SC12MLX	104L2606								117U6011	117U5017			103N1004	103N2008	
SC15MLX	104L2869								117U6013	117U5012			103N1004	103N2009	
SC18MLX	104L2139									117U5373	117-7027		103N1004	103N2009	
SC18MLX.3	104L2146										117-7027		103N1004	103N2009	
SC10/10CL	104L4087								117U6003	117U5017			103N1004	103N2009	
SC12/12CL	104L4088								117U6005	117U5017			103N1004	103N2009	
SC15/15CL	104L4089								117U6019	117U5017			103N1004	103N2009	
SC18/18CL	104L4090										117-7027		103N1004	103N2009	
SC21/21CL	104L4094									117U5373	117-7027		103N1004	103N2009	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] µF	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						alt. connectors available	Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
402	1.13	876	1.50				1/2	10.29	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		X	4 6
517	1.10	1135	1.55				1/2	12.87	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		X	4 6
698	1.20	1377	1.55				3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	4
804	1.22	1539	1.55				3/4	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	4
906	1.18					10	1	20.95	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	4
397	1.11	864	1.56				1/3	10.29	198-254 V, 50 Hz *	F2	209	203	8.2	6.2	6.2		X	4 6
594	1.15						1/2	12.87	198-254 V, 50 Hz *	F2	219	213	8.2	6.2	6.2		X	4 6
725	1.18						3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	4 6
887	1.20						3/4	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	4 6
		854	1.56	1512	2.24		1/2	10.29	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		X	10 11
		1145	1.62	1987	2.35		3/4	12.87	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	10 11
		1338	1.61	2317	2.34	10	3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	10 11
		1344	1.65	2304	2.36		3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	8.2			10 11
		920	1.59	1588	2.27		1/2	10.29	187-254 V, 50 Hz *	F2	209	203	8.2	6.5	6.5			10 11
585	1.15	1119	1.61	1916	2.26		3/4	12.87	187-254 V, 50 Hz *	F2	219	213	8.2	6.5	6.5			10 11
763	1.20	1403	1.61	2425	2.24		3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2			10 11
895	1.27	1636	1.70	2820	2.36	10	1	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2			10 11
960	1.34	1717	1.73	2928	2.37	10	1	17.68	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2			10 11
804	1.13	1753	1.50				3/4	20.58	198-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2			4
1034	1.10	2269	1.55				1	25.74	198-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2			4
1396	1.20	2754	1.55				1 1/4	30.56	198-254 V, 50 Hz	F2	259	254	12.0	6.2	6.2		X	4
1608	1.22	3077	1.55			10	1 1/2	35.38	198-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2			4
1812	1.18					10	1 3/4	41.90	198-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2			4

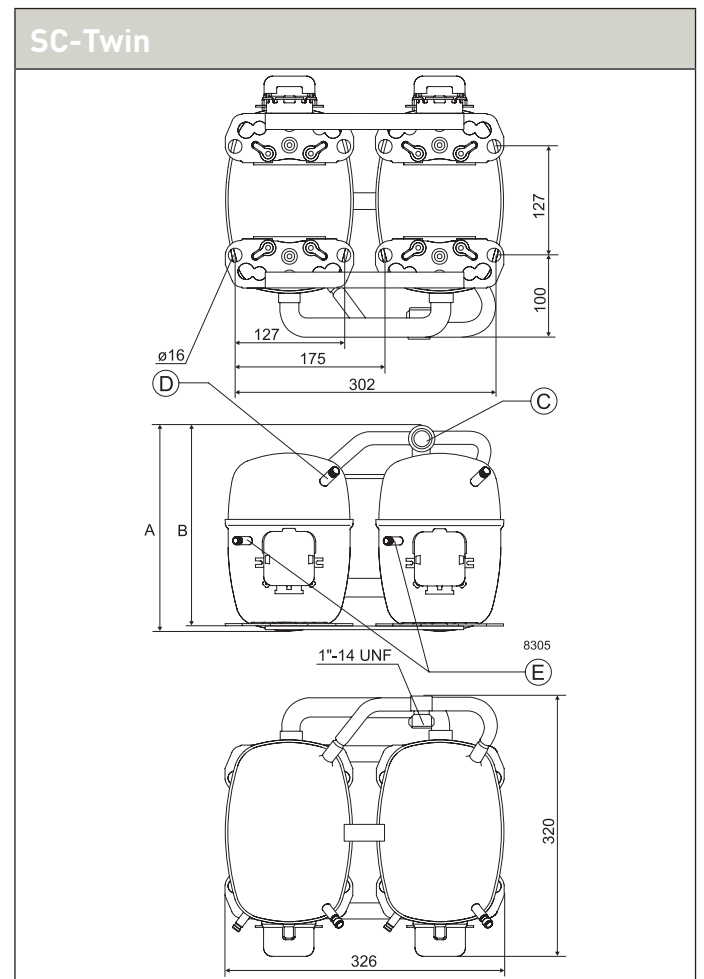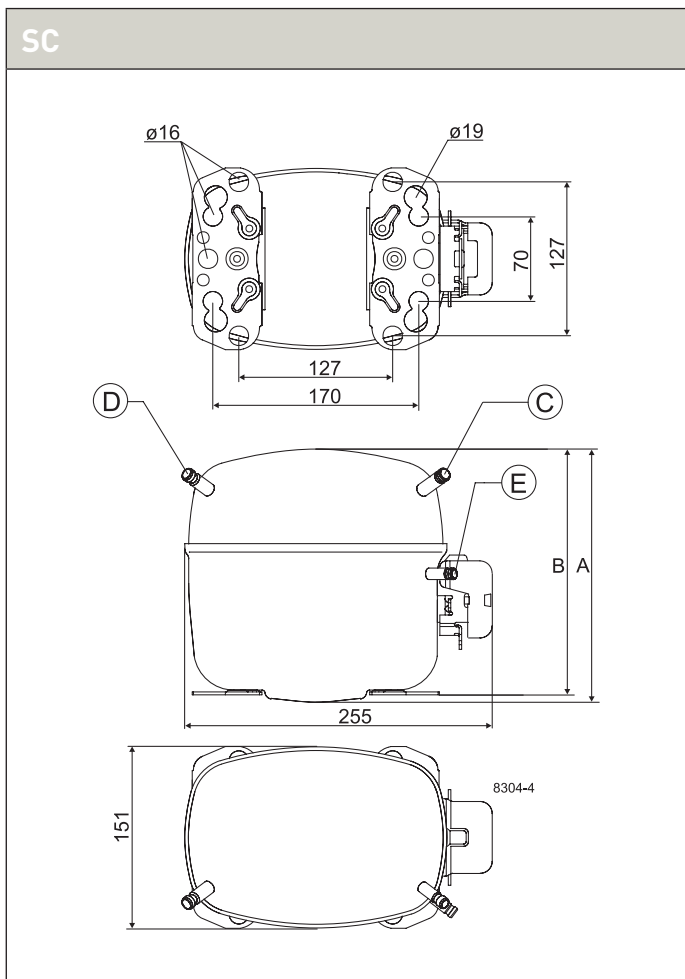



R404A/R507 • 220-240 V • 50 Hz • S-Series

Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]							
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C											
			Cooling capacity		COP				Cooling capacity		COP		Cooling capacity		COP							
			-35	-15	-5	0	10	15	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	-35	-15	-5	0	10	15
SC10/10DL	104L4091	M/HBP																				
SC12/12DL	104L4092	M/HBP																				
SC15/15DL	104L4093	M/HBP																				
SCE18CLX.2	104L2196	LBP	439	1245				446	0.93	1329	1.42			415	1345							
SLV12CLK.2, 2000 rpm	104L2603	LBP	196	572				200	0.86	612	1.42			179	624							
SLV12CLK.2, 2500 rpm	104L2603	LBP	243	742				254	0.89	790	1.45			201	805							
SLV12CLK.2, 3000 rpm	104L2603	LBP	283	895				301	0.90	948	1.47			217	965							
SLV12CLK.2, 4000 rpm	104L2603	LBP	370	1114				388	0.87	1162	1.51			335	1228							

R404A/R507 • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
SC10/10DL	104L4091								117U6005	117U5017			103N1004	103N2009	
SC12/12DL	104L4092								117U6019	117U5017			103N1004	103N2009	
SC15/15DL	104L4093									117U5373	117-7029		103N1004	103N2009	
SCE18CLX.2	104L2196									117U5373	117-7027		103N1004	103N2009	
SLV12CLK.2	104L2603								105N46xx series controller					103N2008	

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F	
		1708	1.56	3023	2.24		1	20.58	198-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2		10 11
		2290	1.63	3974	2.35		1 1/4	25.74	198-254 V, 50 Hz	F2	259	254	12.0	6.2	6.2		10 11
		2676	1.61	4633	2.33	10	1 1/2	30.56	198-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2		10 11
887	1.31					10	3/4	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		4
405	1.19						3/4	12.87	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
512	1.27						3/4	12.87	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
605	1.32						3/4	12.87	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
844	1.33						3/4	12.87	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6

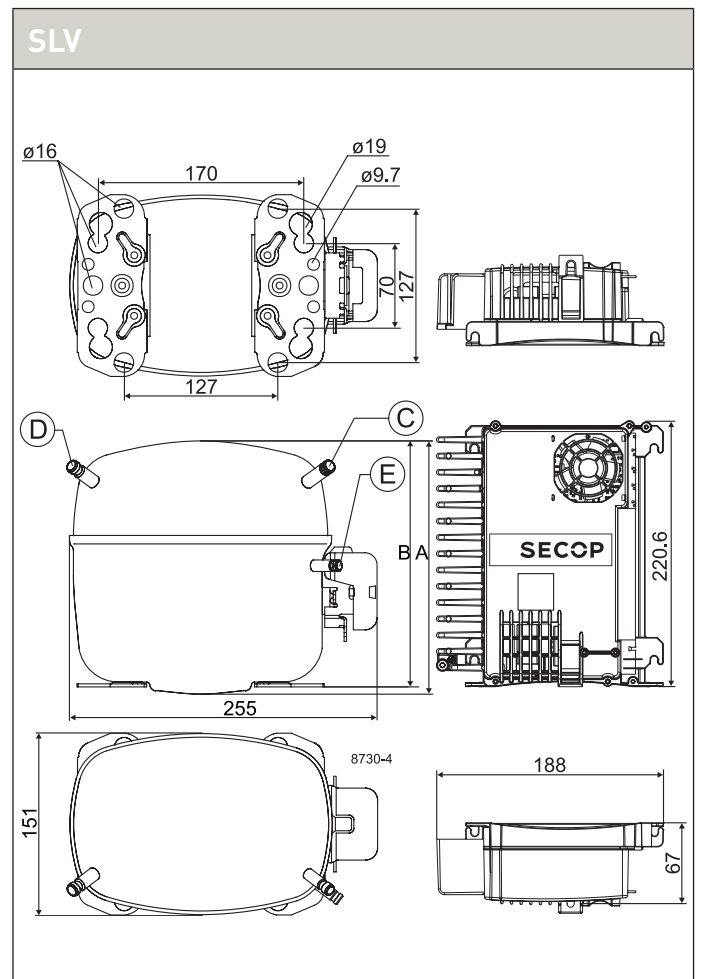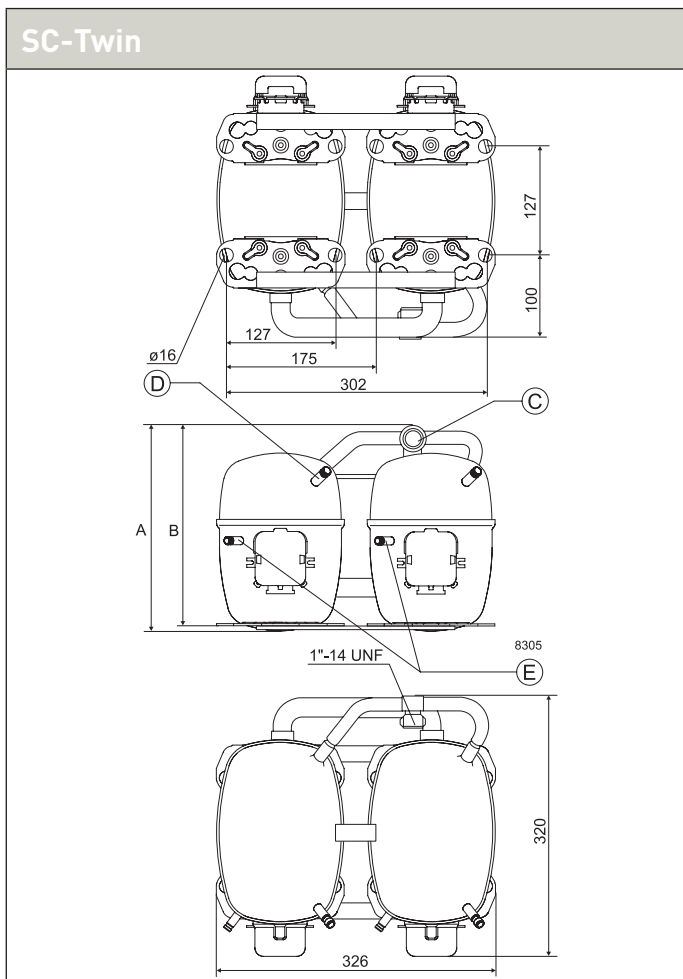


R404A/R507 • 220-240 V • 50 Hz • G-Series

Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
									[W]	[W/W]	[W]	[W/W]	[W]	[W/W]						
GS26CLX	107B0500	LBP	689	2036				703	1.05	2191	1.65			662	2186					
GS34CLX	107B0501	LBP	1007	2816	4238			1003	1.09	3014	1.69			1016	3116	4808				
GS21MLX	107B0502	MBP		1599	2508	3092				1748	1.81	2858	2.23		1711	2709	3358			
GS26MLX	107B0503	MBP		2078	3204	3911				2254	1.86	3615	2.24		2243	3519	4325			
GS34MLX	107B0504	MBP		2764	4143	4998				2953	1.71	4580	1.97		2998	4554	5527			

R404A/R507 • 220-240 V • 50 Hz • G-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm			
GS26CLX	107B0500											117-7056		107B9101
GS34CLX	107B0501											117-7074		107B9101
GS21MLX	107B0502											117-7070		107B9101
GS26MLX	107B0503											117-7072		107B9101
GS34MLX	107B0504											117-7056		107B9101

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
1297	1.39					20	1 1/4	26.30	198-254 V, 50 Hz	F2	259	247	12.9	6.5	8.2			4
1880	1.49	3924	2.07			10	1 3/4	33.80	198-254 V, 50 Hz	F2	279	267	12.9	6.5	8.2		X	4
		2200	2.12	3954	3.09	20	1 1/4	21.20	198-254 V, 50 Hz	F2	259	247	16.1	6.5	9.7			10 11
		2866	2.20	5027	3.12	20	1 1/2	26.30	198-254 V, 50 Hz	F2	279	267	16.1	6.5	9.7			10 11
		3726	2.03	6330	2.74	20	1 3/4	33.80	198-254 V, 50 Hz	F2	279	267	16.1	6.5	9.7			10 11

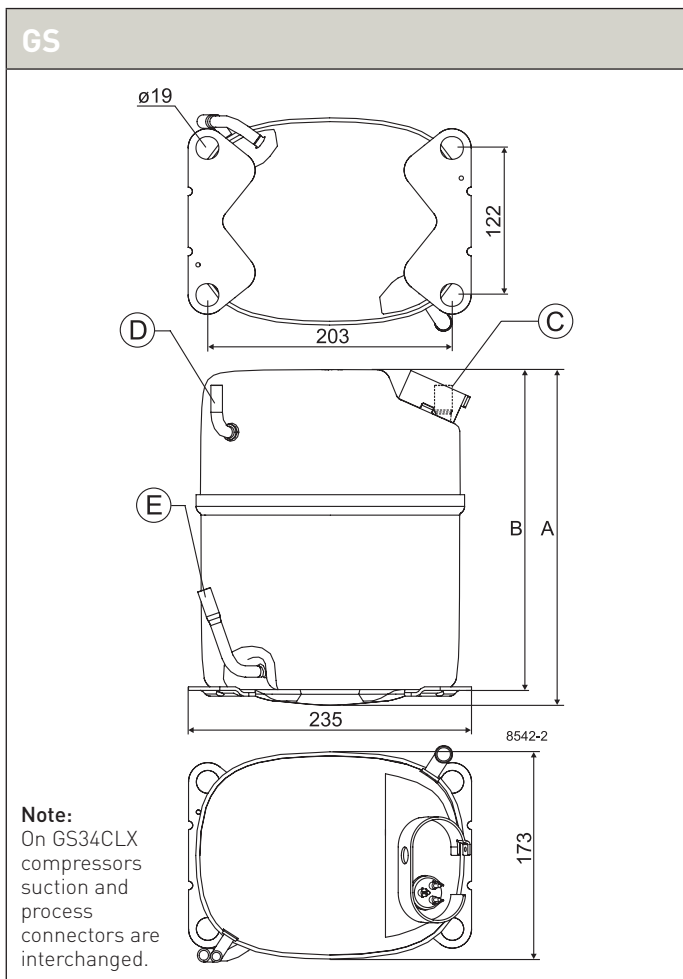

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R290

220-240 V | 50 Hz



T-Series	114-115
D-Series	116-117
N-Series	118-119
S-Series	120-121

Chemical formula

C_3H_8

Typelabel

Typelabel stripe colour: Red
Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSICR: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque

LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.

To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.

HST: High Starting Torque

HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.

ePTC: Electronically controlled PTC


- Compressor restart possible after a few seconds
- Operational wattage loss reduced by 2 watt
- PTC protection screen not needed (surface temp. < 82 °C)
- Temperature resistant up to min. +60 °C
- Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h



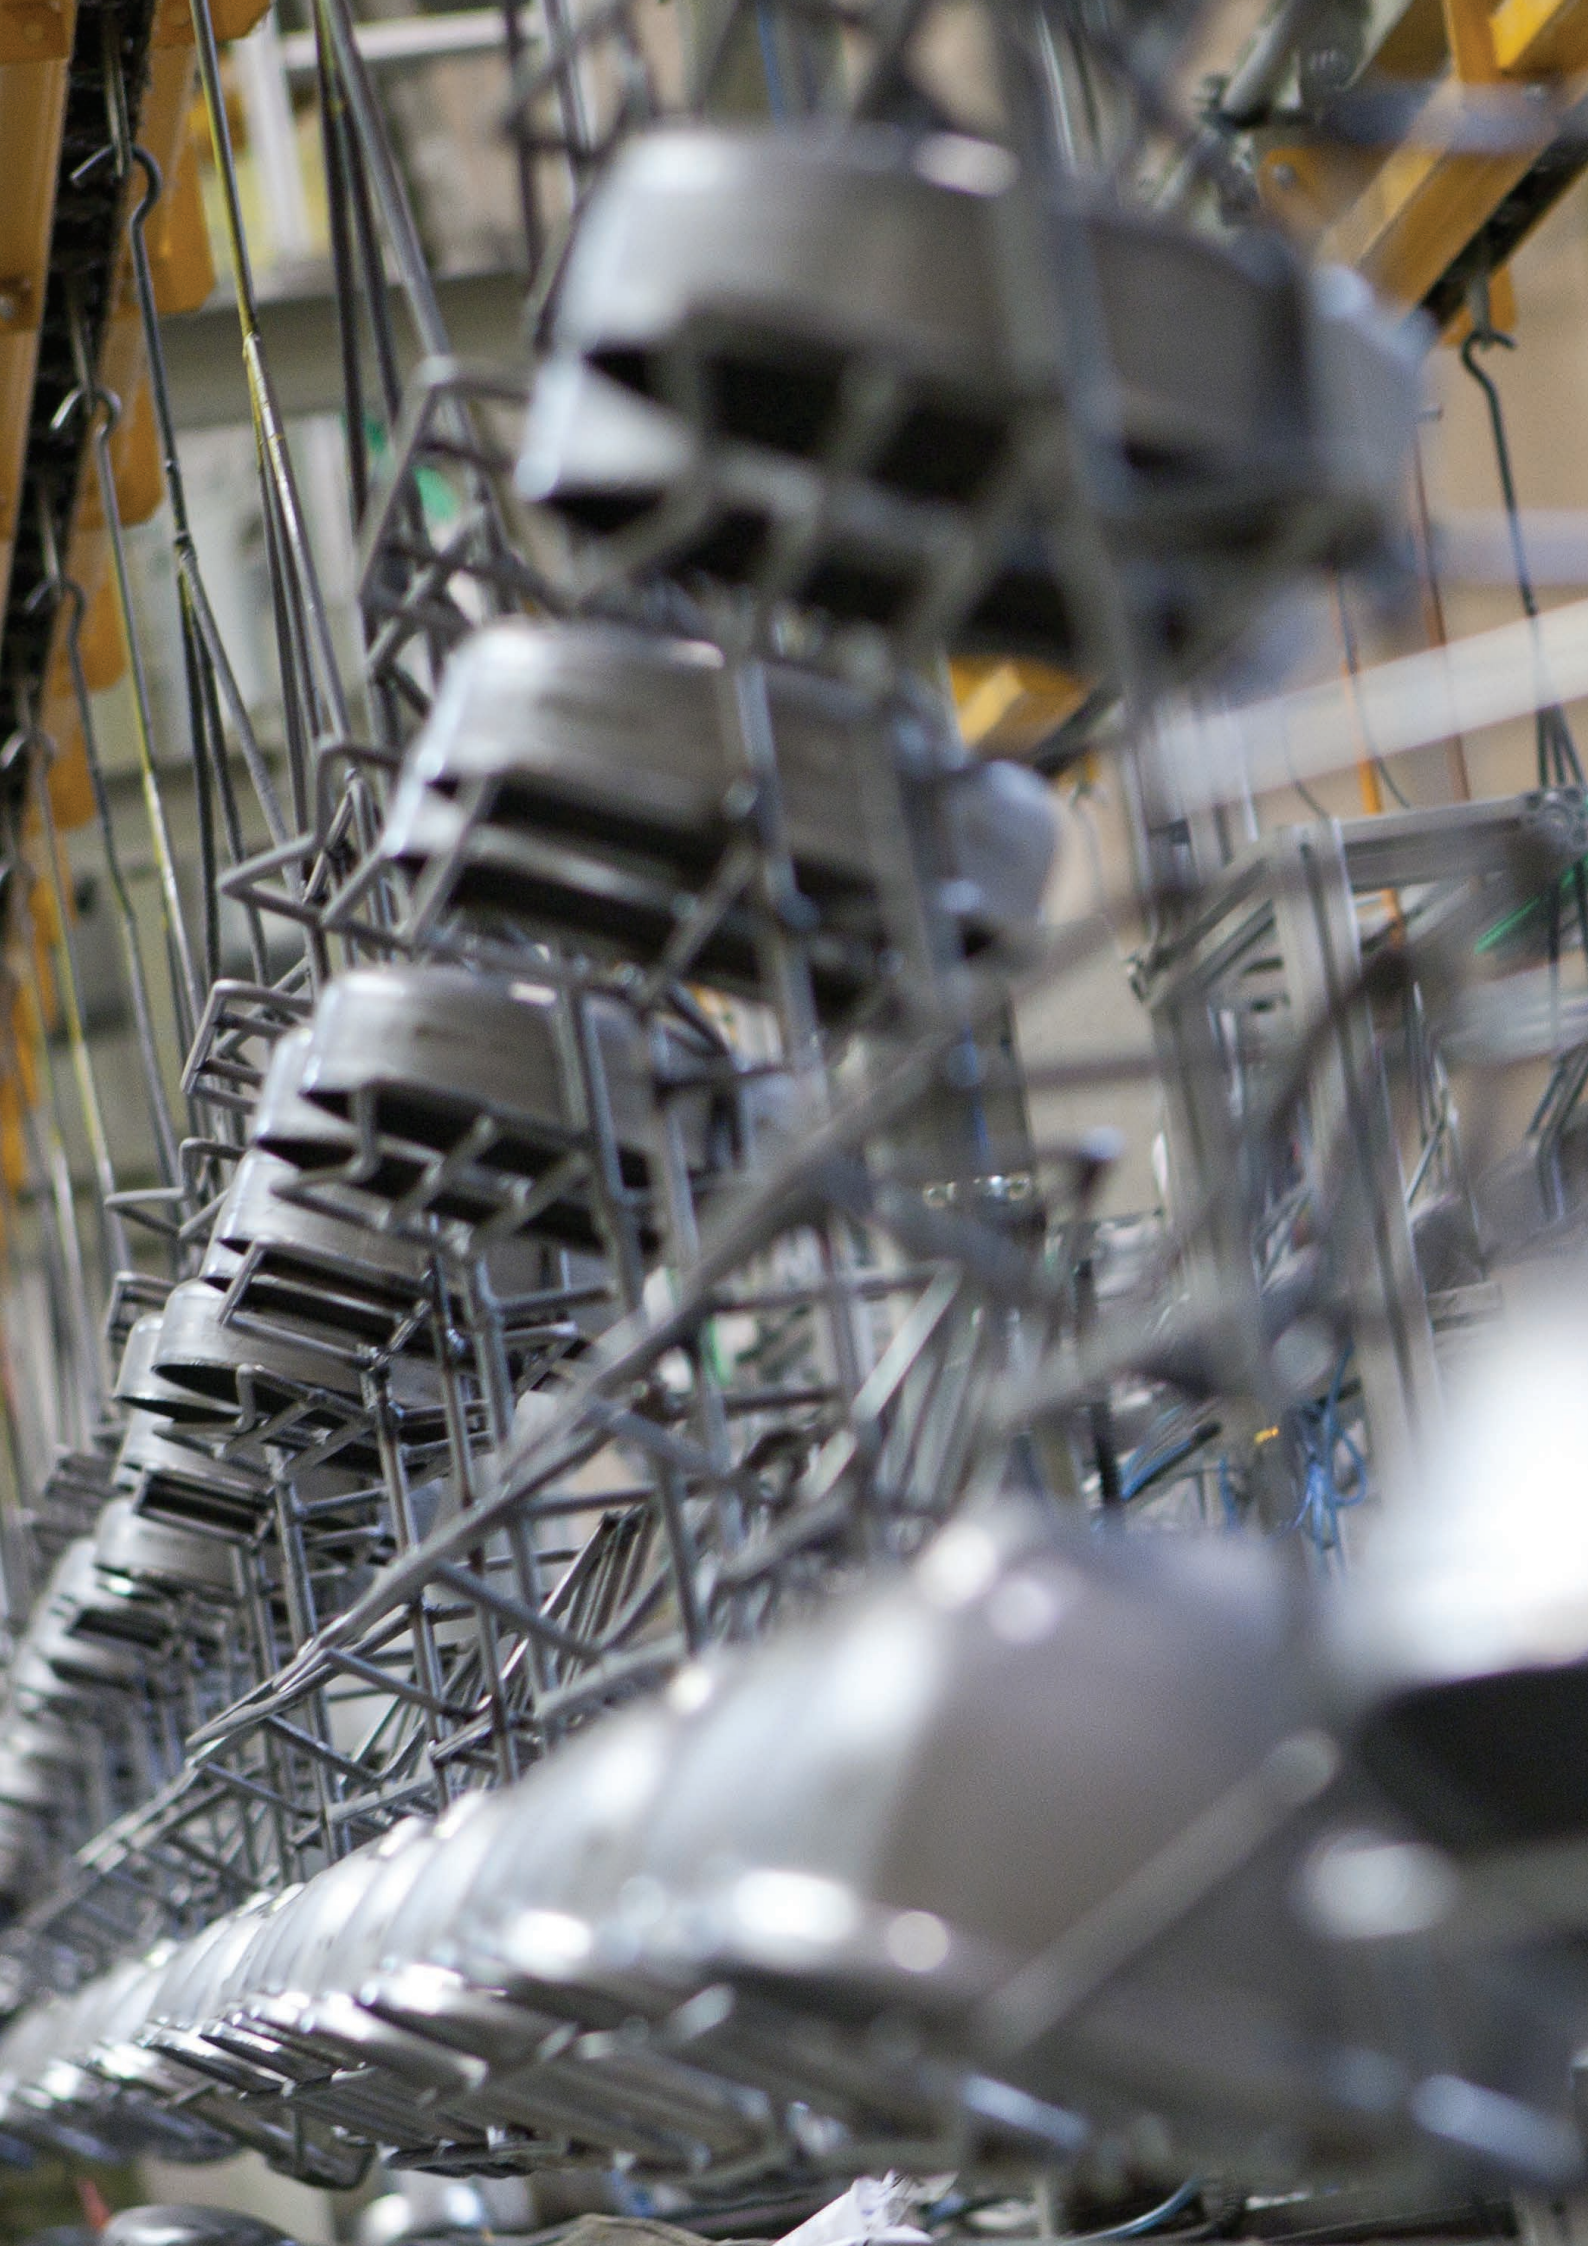


R290 • 220-240 V • 50 Hz • T-Series

Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
TL3CN	102H4380	L/MBP	54	161	244	294			55	0.59	177	1.25	281	1.57	49	161	249	304		
TL4CN	102H4490	L/MBP	78	205	302	360			78	0.74	222	1.30	344	1.63	76	212	316	380		
TL5CN	102H4590	L/MBP	109	283	416	496			108	0.80	306	1.38	472	1.60	109	296	437	522		

R290 • 220-240 V • 50 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TL3CN	102H4380	103N0011	103N0018						117U7004	117U5014			103N1010	103N2010	
TL4CN	102H4490	103N0011	103N0018						117U7004	117U5014			103N1010	103N2010	
TL5CN	102H4590	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119	117U7000	117U5014			103N1010	103N2010	

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F	
105	0.91	212	1.42				1/10	3.13	198-254 V, 50 Hz	F1	163	159	6.2	6.2	5.0		3 4 6 10 11
146	1.07	270	1.51				1/8	3.86	198-254 V, 50 Hz	F1	173	169	6.2	6.2	5.0		3 4 6 10 11
205	1.18	374	1.58			*	1/5	5.08	198-254 V, 50 Hz	F1	173	169	6.2	6.2	5.0	X	3 4 6 10 11

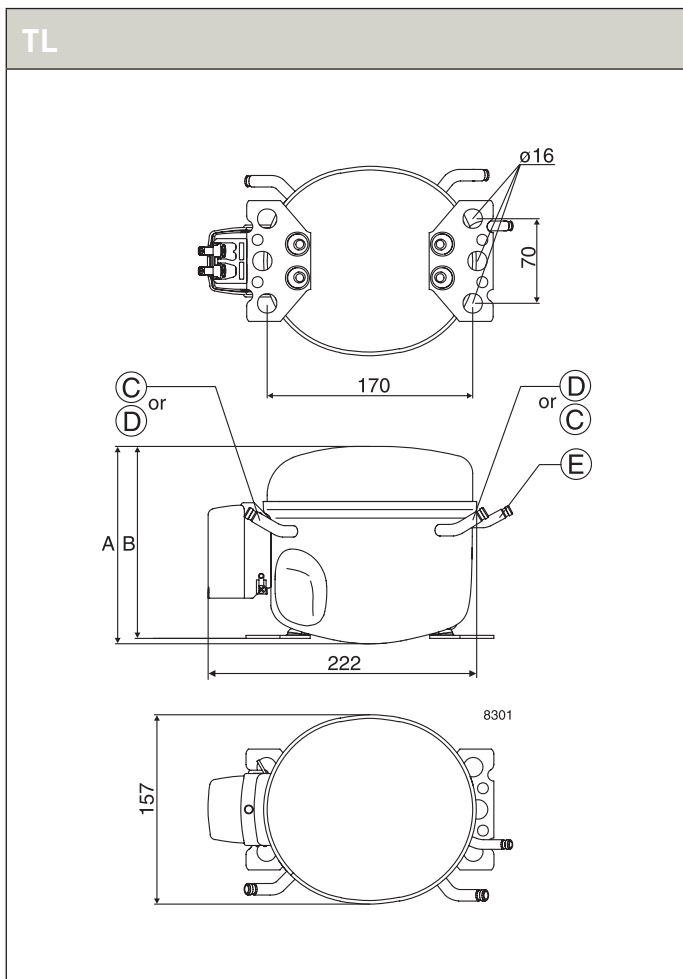

R290 • 220-240 V • 50 Hz • D-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]	
DLE4CN	102H4465	L/MBP	101	261	375	438			100	1.01	280	1.79	411	2.13	103	277	401	469		
DLE4.8CN	102H4565	L/MBP	107	311	456	547			106	0.88	335	1.75	539	2.25	128	339	495	596		
DLE5.7CN	102H4653	L/MBP	162	385	558	667			155	1.07	412	1.76	650	2.18	168	415	604	723		
DLE6.5CN	102H4765	L/MBP	165	414	608	731			160	1.04	446	1.75	709	2.13	168	446	653	784		
DLE7.5CN	102H4853	L/MBP	202	490	718	858			194	1.04	528	1.75	828	2.08	209	520	766	920		

R290 • 220-240 V • 50 Hz • D-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)	HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST			
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)	Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover		
		Spades		Spades		Spades	Spades	Spades		Spades					
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
DLE4CN	102H4465						103N0050		117-7129	117U7000	117U5014			103N1010	103N0491
DLE4.8CN	102H4565						103N0050		117-7129	117U7001	117U5014			103N1010	103N0491
DLE5.7CN	102H4653						103N0050		117-7129	117U7015	117U5015			103N1010	103N0491
DLE6.5CN	102H4765						103N0050		117-7129	117U7016	117U5015			103N1010	103N0491
DLE7.5CN	102H4853						103N0050		117-7129	117U7002	117U5015			103N1010	103N0491

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						Suction C	Process D	Dis-charge E	Oil cooler F	alt. connectors available			
191	1.48	345	2.03	522	2.69	*	1/6	4.00	198-254 V, 50 Hz	F2	175	169	6.2	6.2	5.0			3 4 6 7 10 11
243	1.56	423	2.04	708	2.91	*	1/4	4.80	198-254 V, 50 Hz	F2	175	169	8.2	6.2	6.2			3 4 6 7 10 11
298	1.53	517	2.03	850	2.80	*	1/4	5.70	198-254 V, 50 Hz	F2	175	169	8.2	6.2	6.2		X	3 4 6 7 10 11
316	1.53	559	1.98	921	2.71	*	1/3	6.50	198-254 V, 50 Hz	F2	175	169	8.2	6.2	6.2			3 4 6 7 10 11
367	1.47	656	1.97	1077	2.65	*	1/3	7.48	198-254 V, 50 Hz	F2	175	169	8.2	6.2	6.2		X	3 4 6 7 10 11

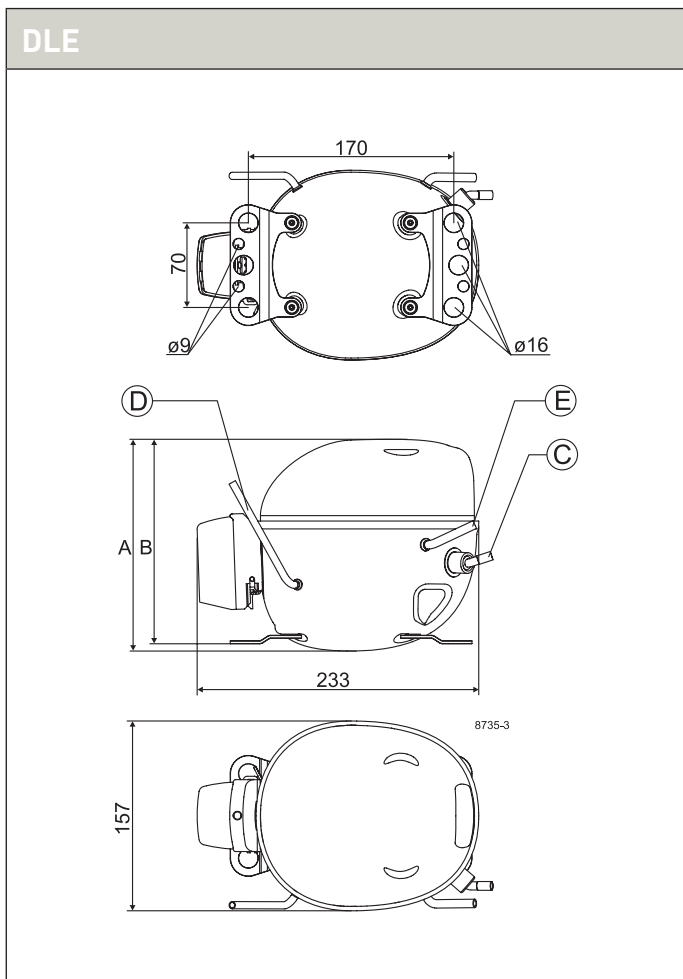



R290 • 220-240 V • 50 Hz • N-Series

Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54,4°C, T _{liq} =32,2°C, T _{suc} =32,2°C Evaporating temperature [°C]																
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15				
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15	-35	-15	-5	0	10
NL7CN	105H6756	L/MBP	166	458	679	814			166	0.91	498	1.63	782	1.90	175	475	713	860													
NL9CN	105H6856	L/MBP	194	526	778	930			192	0.94	571	1.62	890	1.88	205	549	816	981													
NLE8.8CN	105H6880	L/MBP	248	576	838	1001	1400		237	1.12	619	1.80	964	2.20	236	612	895	1069	1499												
NLE10CN	105H6175	L/MBP	274	669	978	1164	1603		265	1.10	721	1.73	1115	2.08	268	703	1039	1242	1724												
NLE11CNL	105H6174	LBP	291	734	1066				283	1.05	790	1.72			301	779	1145														

R290 • 220-240 V • 50 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NL7CN	105H6756	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119	117U7002	117U5015			103N1010	103N2010	
NL9CN	105H6856	103N0011	103N0018	103N0016	103N0021		117-7117	117-7119	117U7002	117U5015			103N1010	103N2010	
NLE8.8CN	105H6880					103N0050			117U7002	117U5015			103N1010	103N2010	
NLE10CN	105H6175					103N0050			117U7002	117U5015			103N1010	103N2010	
NLE11CNL	105H6174					103N0050			117U7003	117U5015			103N1010	103N2010	

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
326	1.35	609	1.87			*	1/2	7.27	198-254 V, 50 Hz	F1	203	197	8.2	6.2	6.2		X	3 4 6 10 11
380	1.39	698	1.86			*	1/2	8.35	198-254 V, 50 Hz	F1	203	197	8.2	6.2	6.2		X	3 4 6 10 11
431	1.57	766	2.04	1246	2.78		1/2	8.76	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2			3 4 6 10 11
487	1.47	889	1.95	1439	2.62		1/2	10.09	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2			3 4 6 10 11
541	1.52	981	1.98				1/2	11.15	198-254 V, 50 Hz	F2	203	197	8.2	6.2	6.2			4 6 10

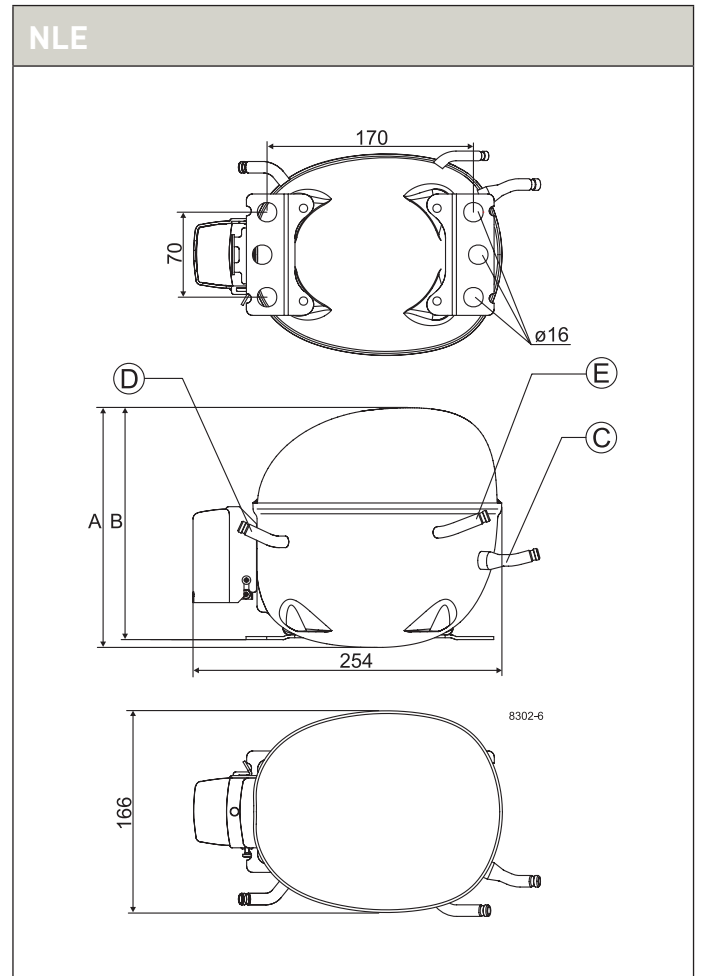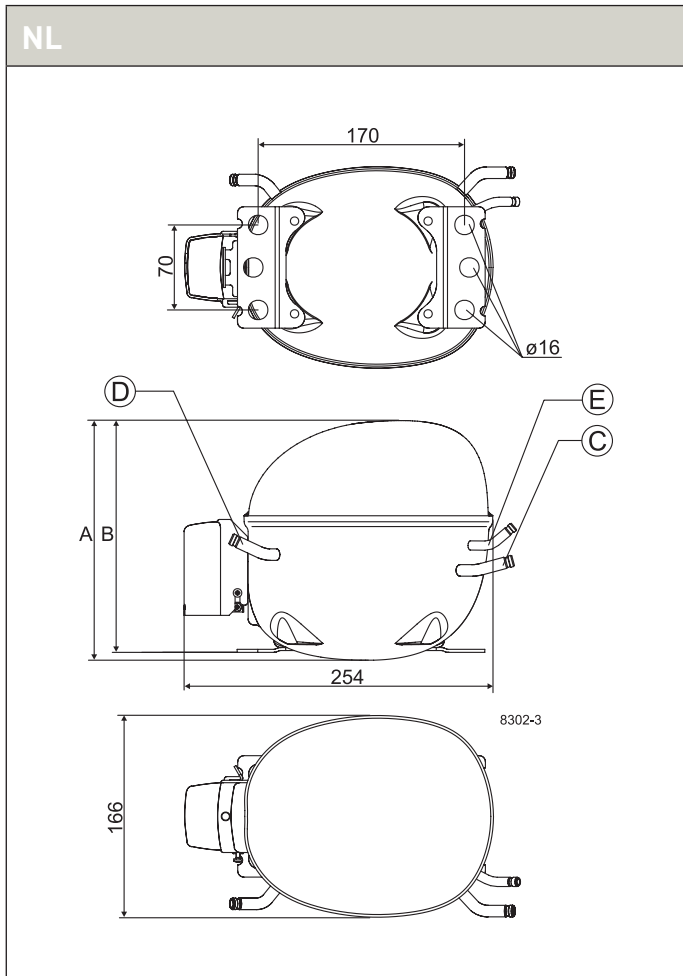

R290 • 220-240 V • 50 Hz • S-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]															
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15			
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]													
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15										
SC10CNX	104H8065	L/MBP	179	531	809	979			183	0.82	586	1.54	953	2.02	176	548	854	1044												
SC12CNX	104H8265	L/MBP	250	678	1050	1293			251	0.89	751	1.57	1279	2.00	227	712	1112	1374												
SC15CNX	104H8565	L/MBP	297	887	1328	1594			311	0.92	970	1.65	1549	1.93	252	919	1417	1719												
SC18CNX	104H8865	L/MBP	341	1033	1543	1849			352	0.89	1129	1.52	1806	1.72	316	1107	1686	2034												
SC12CNX.2	104H8266	LBP	258	725					260	0.85	794	1.50			231	743														
SC15CNX.2	104H8566	LBP	332	900					327	0.89	993	1.55			346	929														
SC18CNX.2	104H8866	LBP	384	1057					399	0.90	1130	1.58			343	1195														
SC21CNX.2	104H8166	LBP	492	1233					502	0.97	1305	1.45			463	1401														
SC10MNX	104H8075	MBP		567	883	1074					634	1.51	1043	2.04		576	922	1133												
SC12MNX	104H8275	MBP		741	1127	1361					817	1.57	1330	2.06		758	1196	1463												
SC15MNX	104H8575	MBP		887	1322	1586					966	1.56	1512	1.96		968	1411	1681												
SC18MNX	104H8875	MBP		1035	1506	1798					1112	1.48	1747	1.85		1110	1624	1946												
SLV15CNK.2 2000 rpm	104H8541	LBP	236	638					234	0.99	697	1.65			232	665														
SLV15CNK.2 2500 rpm	104H8541	LBP	297	805					296	1.01	878	1.69			291	842														
SLV15CNK.2 3000 rpm	104H8541	LBP	353	941					350	1.02	1021	1.70			360	981														
SLV15CNK.2 4000 rpm	104H8541	LBP	460	1228					459	1.00	1325	1.64			439	1299														

R290 • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
SC10CNX	104H8065									117U5372	117-7025	117-9719	103N1004	103N2009	
SC12CNX	104H8265									117U5372	117-7025	117-9719	103N1004	103N2009	
SC15CNX	104H8565									117U5373	117-7031	117-9711	103N1004	103N2009	
SC18CNX	104H8865									117U5373	117-7052	117-9718	103N1004	103N2009	
SC12CNX.2	104H8266								117U7003	117U5017			103N1004	103N2009	
SC15CNX.2	104H8566								117U7005	117U5017			103N1004	103N2009	
SC18CNX.2	104H8866								117U7011	117U5017			103N1004	103N2009	
SC21CNX.2	104H8166								117U7013	117U5012			103N1004	103N2009	
SC10MNX	104H8075								117U7005	117U5017			103N1004	103N2008	
SC12MNX	104H8275								117U7019	117U5017			103N1004	103N2008	
SC15MNX	104H8575								117U7019	117U5017			103N1004	103N2008	
SC18MNX	104H8875								117U7011	117U5017			103N1004	103N2008	
SLV15CNK.2	104H8541													105N46xx series controller	103N2008

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μ F]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F	
359	1.27	725	1.84			5	1/3	10.29	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		3 4 6 10 11
475	1.31	941	1.85			5	1/2	12.87	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2	X	3 4 6 10 11
597	1.36	1206	1.89			10	1/2	15.28	198-254 V, 50 Hz	F2	209	203	10.2	6.2	6.2	X	3 4 6 10 11
728	1.36	1438	1.80			10	3/4	17.69	198-254 V, 50 Hz	F2	209	203	10.2	6.2	6.2	X	3 4 6 10 11
491	1.20						1/2	12.87	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		4 6
625	1.32						3/4	15.28	198-254 V, 50 Hz	F2	209	203	10.2	6.2	6.2		4 6
798	1.31						3/4	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		4 6
963	1.46					10	1	20.95	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		4
352	1.20	781	1.75	1357	2.66		1/2	10.29	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		3 7 10 11
475	1.13	1015	1.83	1744	2.71		1/2	12.87	198-254 V, 50 Hz	F2	219	213	8.2	6.2	6.2		3 7 10 11
681	1.51	1210	1.80	1948	2.48		3/4	15.28	198-254 V, 50 Hz	F2	219	213	8.2	6.2	6.2		3 7 10 11
778	1.31	1391	1.76	2284	2.41		3/4	17.69	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		3 7 10 11
446	1.32						3/4	15.28	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
566	1.43						3/4	15.28	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
675	1.44						3/4	15.28	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6
889	1.42						3/4	15.28	180-254 V, 50 Hz *	F2	199	193	10.2	6.2	6.2		4 6

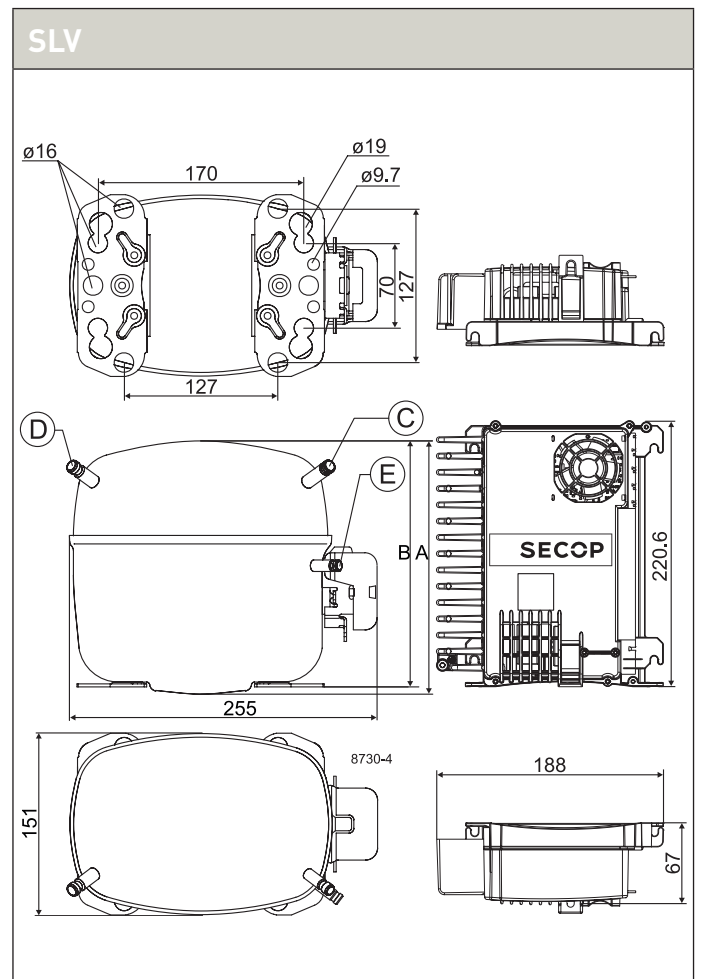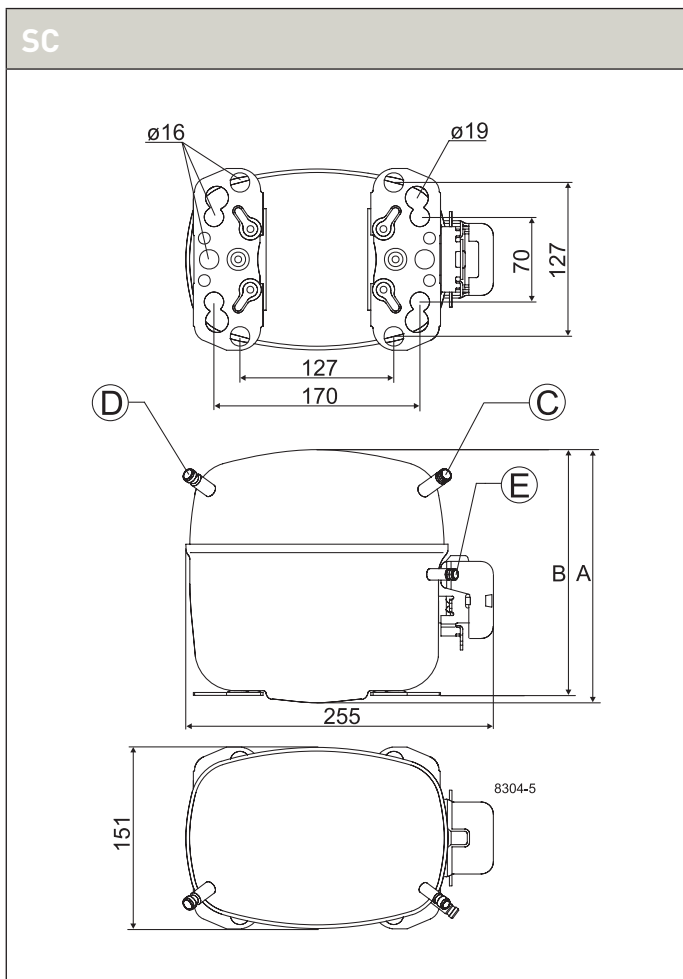

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R407C

220-240 V | 50 Hz



S-Series 124-125

Chemical formula

$\text{CH}_2\text{F}_2 / \text{CHF}_2\text{CF}_3 / \text{CH}_2\text{FCF}_3$

Typelabel

Typelabel stripe colour: Red
Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSRC: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R407C • 220-240 V • 50 Hz • S-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -35°C / 40°C			MBP rating point -10°C / 45°C			HBP rating point 5°C / 50°C			-35		-15		-5		0		10		15	
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]
SC10DL	104L2525	M/HBP		611	968	1192	1747	2085			673	1.33	1100	1.64		645	1053	1302	1919	2299			
SC12DL	104L2625	M/HBP		806	1279	1565	2258	2674			892	1.36	1441	1.70		866	1409	1731	2512	2989			
SC15DL	104L2856	M/HBP		964	1493	1825	2652	3156			1047	1.38	1682	1.71		1036	1643	2015	2933	3498			
SC10/10DL	104L4091	M/HBP		1222	1935	2383	3494	4169			1345	1.33	2199	1.64		1290	2105	2604	3838	4597			
SC12/12DL	104L4092	M/HBP		1612	2559	3130	4516	5348			1783	1.36	2883	1.70		1732	2817	3461	5024	5978			
SC15/15DL	104L4093	M/HBP		1928	2985	3651	5304	6311			2094	1.38	3364	1.71		2071	3286	4029	5865	6995			

R407C • 220-240 V • 50 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
SC10DL	104L2525								117U6005	117U5017			103N1004	103N2009
SC12DL	104L2625								117U6019	117U5017			103N1004	103N2009
SC15DL	104L2856									117U5373	117-7029		103N1004	103N2009
SC10/10DL	104L4091								117U6005	117U5017			103N1004	103N2009
SC12/12DL	104L4092								117U6019	117U5017			103N1004	103N2009
SC15/15DL	104L4093									117U5373	117-7029		103N1004	103N2009

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		alt. connectors available
		854	1.56	1512	2.24		1/2	10.29	198-254 V, 50 Hz	F2	209	203	8.2	6.2	6.2		X	10 11
		1145	1.62	1987	2.35		3/4	12.87	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	10 11
		1338	1.61	2317	2.34	10	3/4	15.28	198-254 V, 50 Hz	F2	219	213	10.2	6.2	6.2		X	10 11
		1708	1.56	3023	2.24		1	20.58	198-254 V, 50 Hz	F2	249	244	12.0	6.2	6.2			10 11
		2290	1.63	3974	2.35		1 1/4	25.74	198-254 V, 50 Hz	F2	259	254	12.0	6.2	6.2			10 11
		2676	1.61	4633	2.33	10	1 1/2	30.56	198-254 V, 50 Hz	F2	259	254	16.0	6.2	6.2			10 11

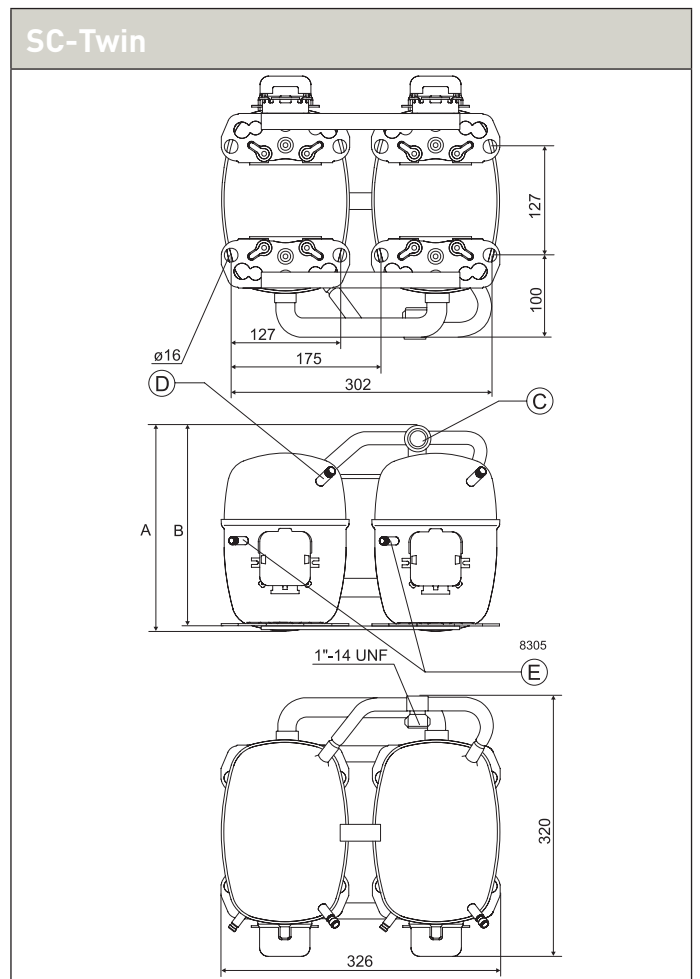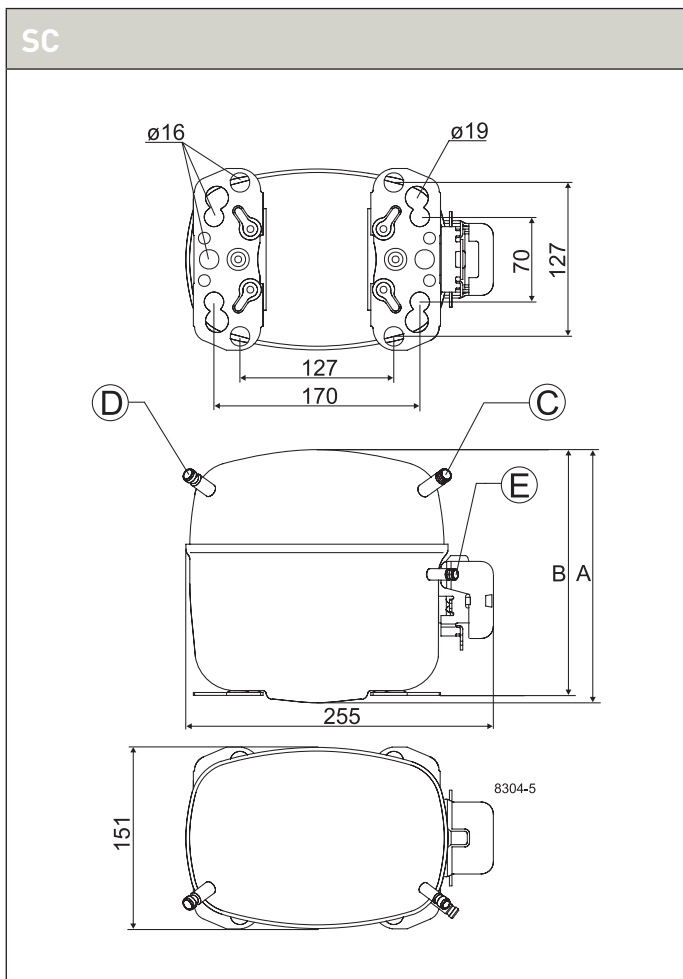

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R134a

220-240 V | 60 Hz



T-Series	128-129
N-Series.....	130-131
F-Series	132-133
S-Series	134-135

Chemical formula

CH₂FCF₃

Typelabel

Typelabel stripe colour: Blue
Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSRC: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices


LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h



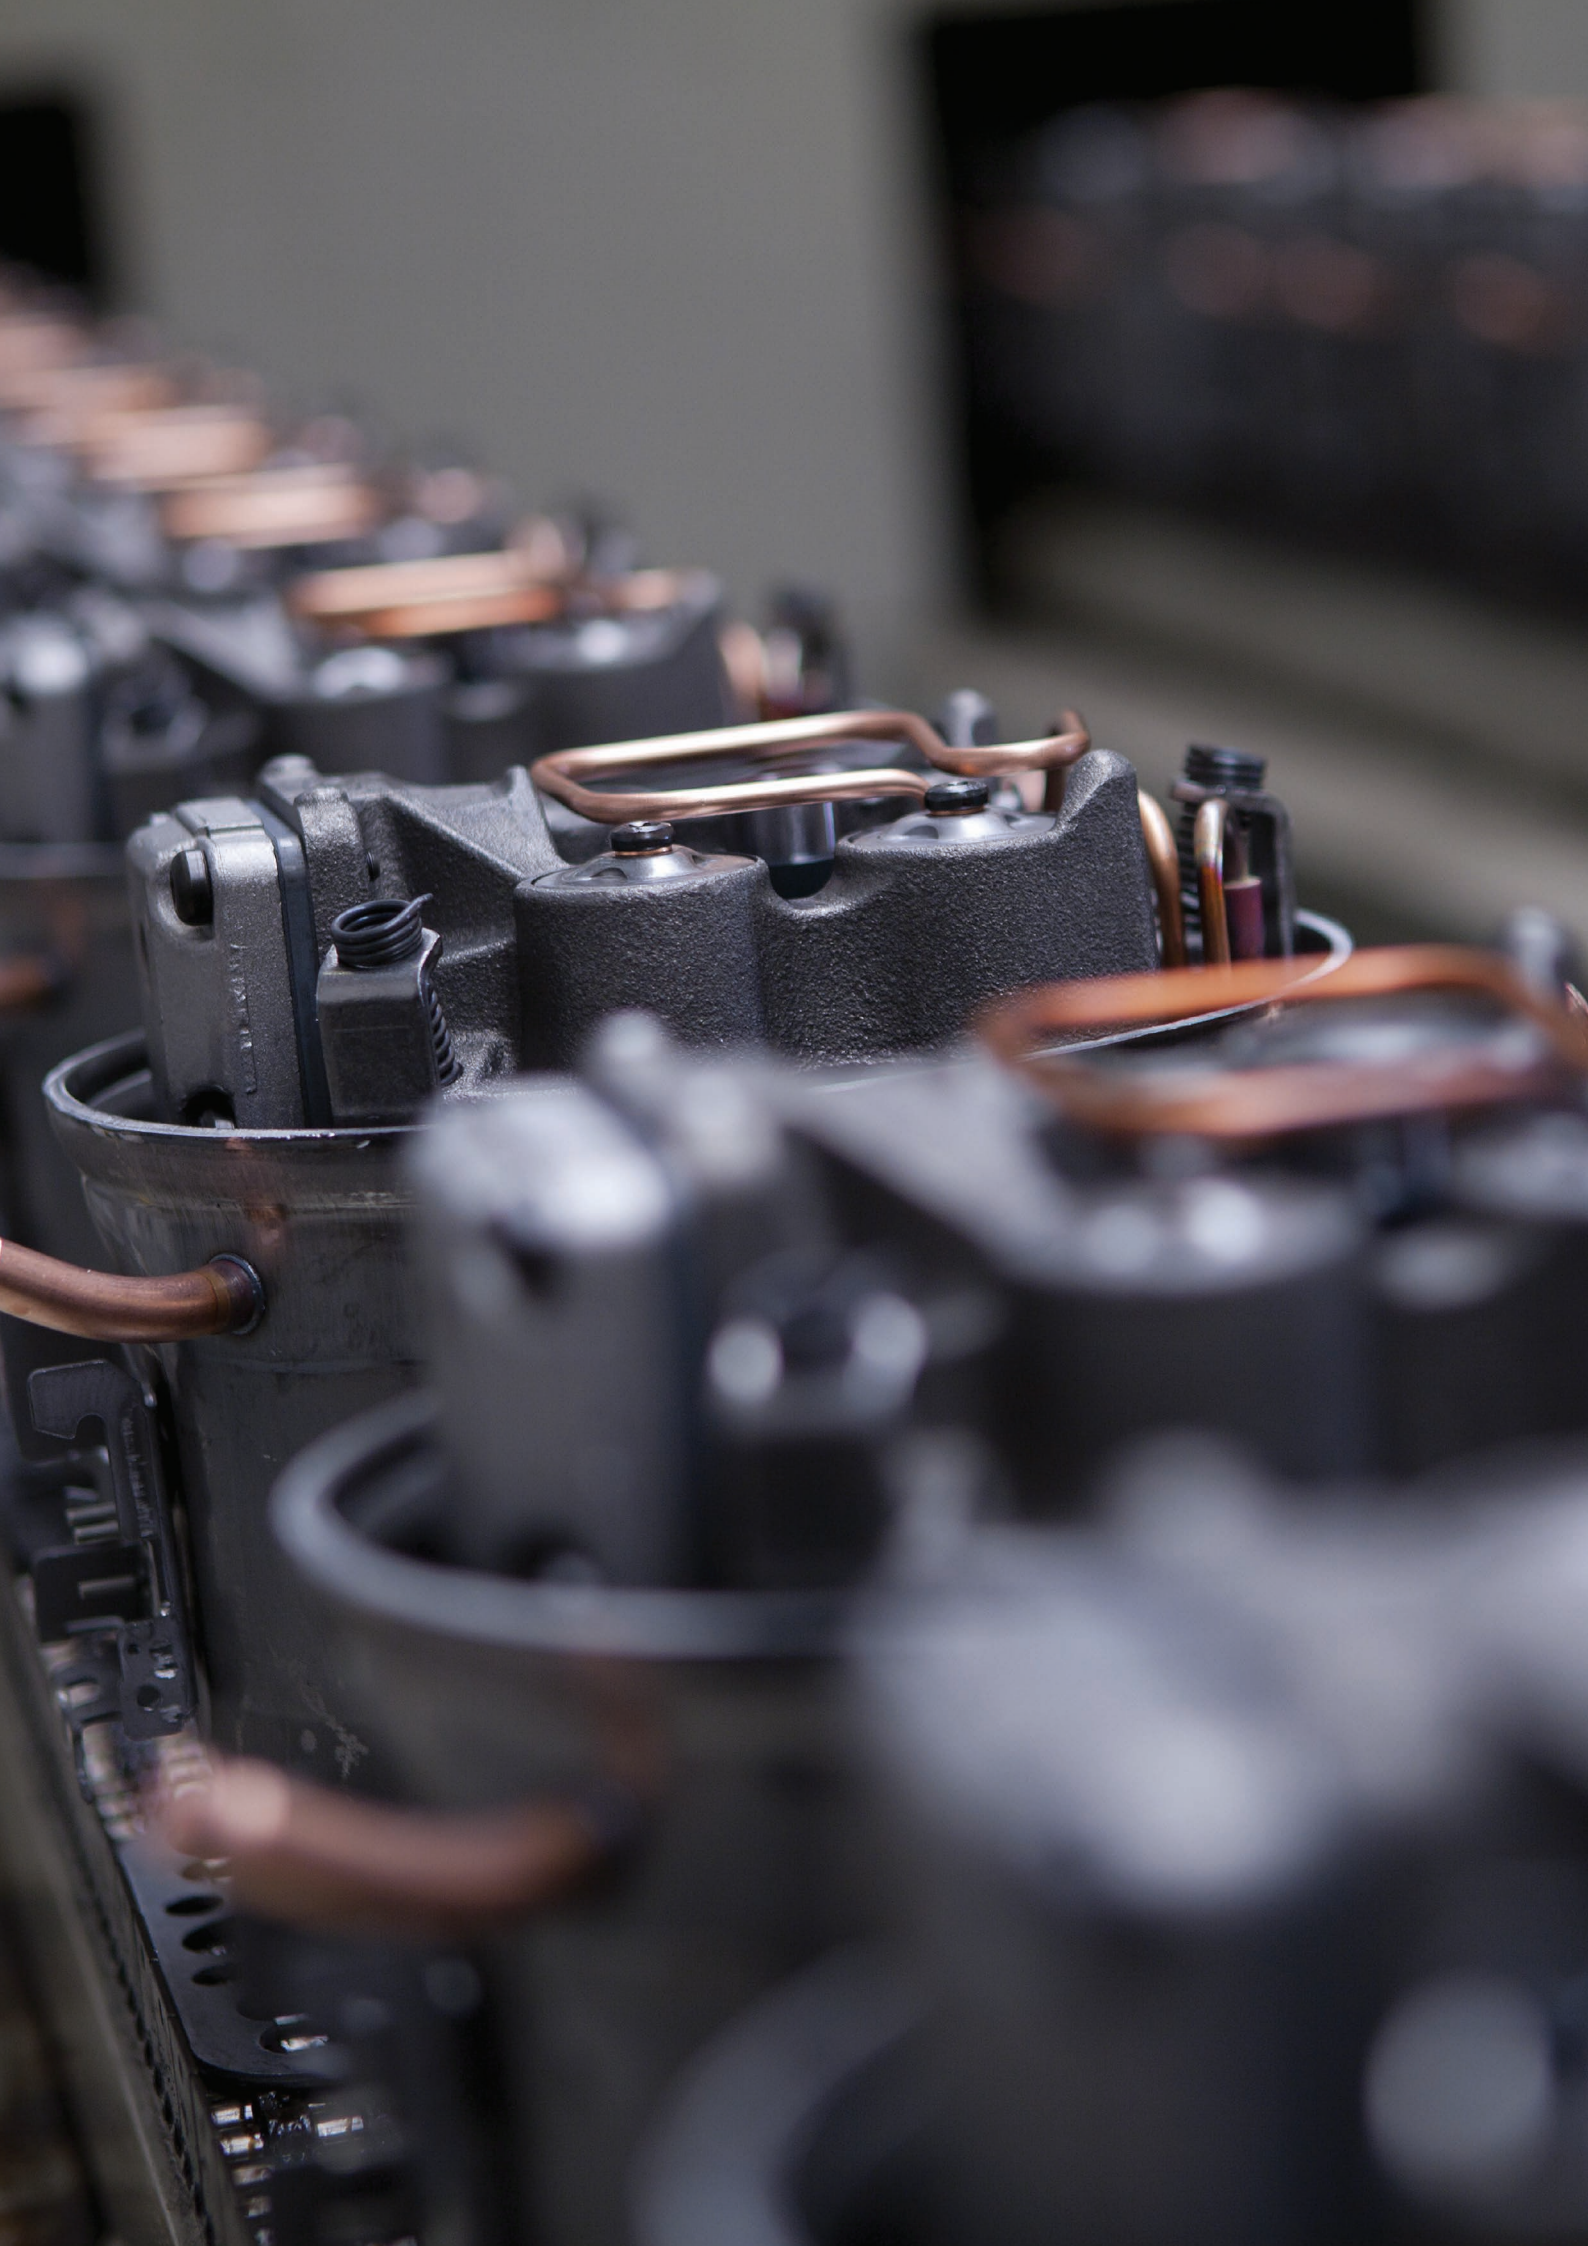

R134a • 220-240 V • 60 Hz • T-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]									
			LBP rating point -25°C / 55°C						MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C													
			Cooling capacity		COP				Cooling capacity		COP		Cooling capacity		COP									
			-35	-15	-5	0	10	15	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	-35	-15	-5	0	10	15		
TL2.5G	102G4251	L/M/HBP	14	80	134	168	253	306	42	0.62	105	1.09	208	1.58	18	100	167	210	317	383				
TL3G	102G4350	LBP		95	161				47	0.68	125	1.13				118	200							
TL4G	102G4452	LBP		127	211				70	0.80	166	1.23				158	261							
TL4G	102G4458	LBP		127	211				70	0.80	166	1.23				158	261							
TL5G	102G4550	LBP		162	260				91	0.87	207	1.22				200	322							
TL4GH	102G4455	HBP		118	208	264	403	489			160	1.15	328	1.70		149	260	329	503	611				

R134a • 220-240 V • 60 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TL2.5G	102G4251	103N0011	103N0018						117U6007	117U5014			103N1010	103N2011	
TL3G	102G4350	103N0011	103N0018						117U6009	117U5014			103N1010	103N2010	
TL4G	102G4452	103N0011	103N0018						117U6004	117U5014			103N1010	103N2010	
TL4G	102G4458	103N0011	103N0018						117U6004	117U5014			103N1010	103N2011	
TL5G	102G4550	103N0011	103N0018						117U6000	117U5014			103N1010	103N2010	
TL4GH	102G4455								117U6000	117U5014			103N1010	103N2011	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		
60	0.85	140	1.37	258	1.92		1/10	2.61	198-254 V, 60 Hz *	S	163	159	6.2	6.2	5.0		X	3 10 11
68	0.93	167	1.39				1/10	3.13	198-254 V, 60 Hz *	S	163	159	6.2	6.2	5.0		X	6 10
97	1.06	220	1.53				1/10	3.86	198-254 V, 60 Hz *	S	173	169	6.2	6.2	5.0		X	6 10
97	1.06	220	1.53				1/10	3.86	198-254 V, 60 Hz *	S	173	169	6.5	6.5	5.0		X	6 10
126	1.13	272	1.49				1/8	5.08	198-254 V, 60 Hz *	S	173	169	6.2	6.2	5.0		X	6 10
		217	1.47	409	2.06		1/8	3.86	198-254 V, 60 Hz *	F2	173	169	6.2	6.2	5.0			8

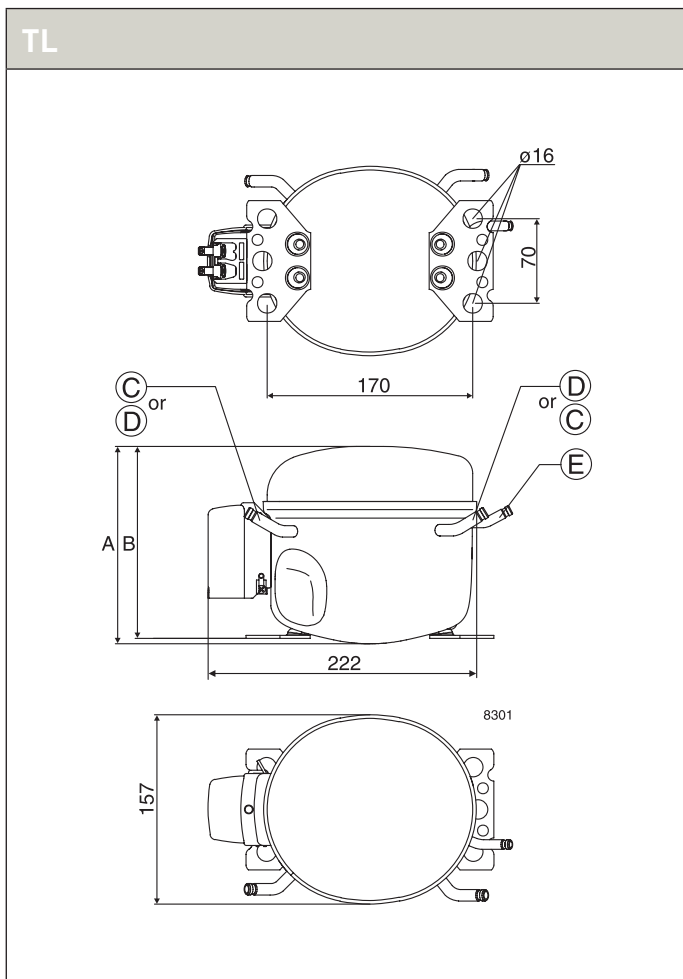



R134a • 220-240 V • 60 Hz • N-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity	COP		Cooling capacity	COP		Cooling capacity	COP		W	W/W	W	W/W	W	W/W	W	W/W	W	W/W	W	W/W
			[W]	[W/W]		[W]	[W/W]		[W]	[W/W]													
NF7FX	105G6743	L/MBP		313	489	602				187	0.91	393	1.35	734	1.96		387	606	746				
NF10FX	105G6846	L/MBP		363	569	706				223	0.89	456	1.28	870	1.79		448	705	876				
NL6FT	105G6628	LBP	59	199						119	0.94	251	1.40			73	247						
NL6.1MF	105G6660	L/MBP	43	223	374	470				117	0.89	292	1.34	581	1.90	55	278	465	585				
NL7.3MF	105G6772	L/MBP	73	283	458	570				159	0.92	363	1.32	700	1.85	92	352	570	709				
NL8.4MF	105G6879	L/MBP	77	325	532	664				179	0.95	420	1.35	818	1.87	96	404	662	827				
NL10MF	105G6885	L/MBP	109	406	650	807				233	1.00	518	1.39	989	1.91	136	503	807	1002				

R134a • 220-240 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
NF7FX	105G6743							117U4140	117U5018			117U0349	117U1023	
NF10FX	105G6846							117U4139	117U5018			117U0349	117U1023	
NL6FT	105G6628	103N0011	103N0018					117U6000	117U5015			103N1010	103N2010	
NL6.1MF	105G6660	103N0011	103N0018					117U6015	117U5015			103N1010	103N2011	
NL7.3MF	105G6772	103N0011	103N0018					117U6016	117U5015			103N1010	103N2011	
NL8.4MF	105G6879	103N0011	103N0018					117U6016	117U5018			103N1010	103N2011	
NL10MF	105G6885	103N0011	103N0018					117U6022	117U5018			103N1010	103N2011	

ASHRAE						Run capacitor [* optional] µF	Power [HP]	Displacement [cm³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						Suction C	Process D	Dis- charge E	Oil cooler F	alt. connectors available			
254	1.18	512	1.68	903	2.37		1/4	7.27	198-242 V, 60 Hz*	F1	203	197	8.2	6.5	6.5		X	3
300	1.14	595	1.58	1078	2.15		1/3	10.09	198-242 V, 60 Hz *	F2	203	197	8.2	6.5	6.5		X	3
162	1.22						1/7	6.13	198-254 V, 60 Hz *	S	197	191	6.2	6.2	5.0			3
165	1.17	390	1.67	722	2.31		1/5	6.13	187-254 V, 60 Hz *	S	190	184	8.2	6.2	6.2		X	3
221	1.19	480	1.64	865	2.24		1/4	7.27	187-254 V, 60 Hz *	F1	197	191	8.2	6.2	6.2		X	3
249	1.24	556	1.67	1013	2.27		1/3	8.35	187-254 V, 60 Hz *	F1	197	191	8.2	6.2	6.2		X	3
320	1.29	681	1.71	1221	2.31		1/3	10.09	187-254 V, 60 Hz *	F1	203	197	8.2	6.2	6.2		X	3

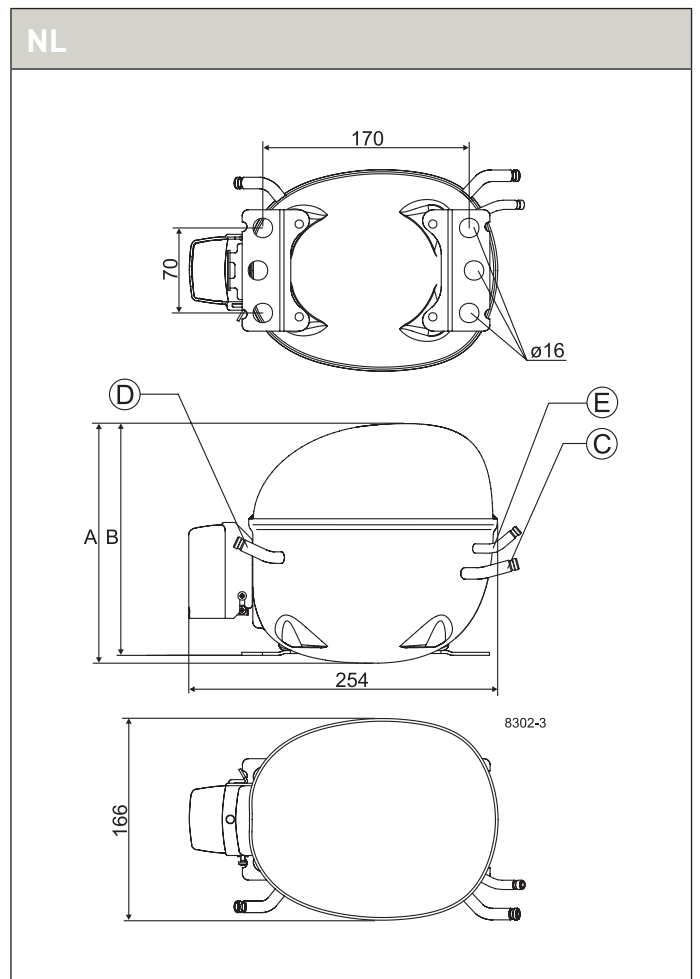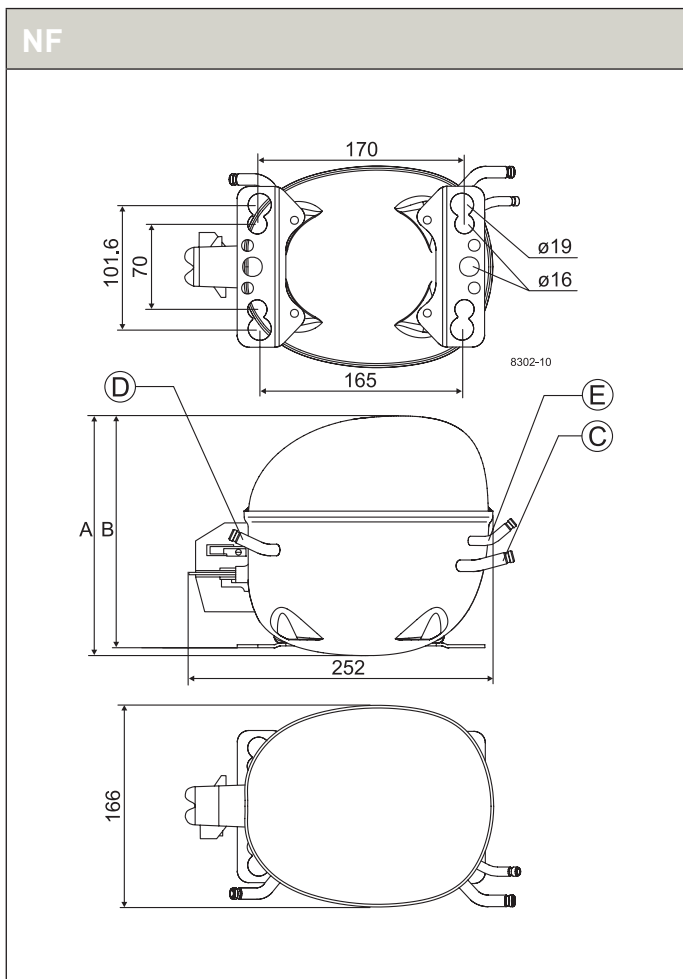


R134a • 220-240 V • 60 Hz • F-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]									
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15		
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]
FR6G	103G6660	LBP	199	345					92	0.78	266	1.35							247	428				
FR7.5G	103G6680	LBP	228	385					112	0.81	300	1.31							282	477				
FR7.5G	103G6690	LBP	228	385					112	0.81	300	1.31							282	477				
FR8.5G	103G6780	LBP	263	441					138	0.85	345	1.26							327	547				
FR8.5G	103G6790	LBP	263	441					138	0.85	345	1.26							327	547				
FR10G	103G6880	LBP	292	486					153	0.79	381	1.21							362	602				
FR10G	103G6890	LBP	292	486					153	0.79	381	1.21							362	602				
FR7GH	103G6683	HBP	225	379	482	753	924				294	1.35	607	1.91					279	471	600	940	1155	
FR7GH	103G6692	HBP	225	379	482	753	924				294	1.35	607	1.91					279	471	600	940	1155	

R134a • 220-240 V • 60 Hz • F-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
FR6G	103G6660	103N0011	103N0018							117U6000	117U5015			103N1010	103N2010
FR7.5G	103G6680	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
FR7.5G	103G6690	103N0011	103N0018							117U6001	117U5015			103N1010	103N2010
FR8.5G	103G6780	103N0011	103N0018							117U6015	117U5015			103N1010	103N2010
FR8.5G	103G6790	103N0011	103N0018							117U6015	117U5015			103N1010	103N2010
FR10G	103G6880	103N0011	103N0018							117U6010	117U5015			103N1010	103N2010
FR10G	103G6890	103N0011	103N0018							117U6010	117U5015			103N1010	103N2010
FR7GH	103G6683									117U6016	117U5015			103N1010	103N2011
FR7GH	103G6692									117U6016	117U5015			103N1010	103N2011

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
135	1.06	357	1.69				1/8	6.23	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2			6 10
161	1.09	399	1.62				1/7	6.93	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2		X	4 6 10
161	1.09	399	1.62				1/7	6.93	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2	6.2		4 6 10
194	1.11	459	1.55				1/6	7.95	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2			4 6 10
194	1.11	459	1.55				1/6	7.95	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2	6.2		4 6 10
215	1.05	505	1.49				1/5	9.05	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2		X	4 6 10
215	1.05	505	1.49				1/5	9.05	198-254 V, 60 Hz *	F1	196	191	8.2	6.2	6.2	6.2		4 6 10
		393	1.67	758	2.33		1/4	6.93	198-254 V, 60 Hz *	F2	196	191	8.2	6.2	8.2			8
		393	1.67	758	2.33		1/4	6.93	198-254 V, 60 Hz *	F2	196	191	8.2	6.2	8.2	8.2		8

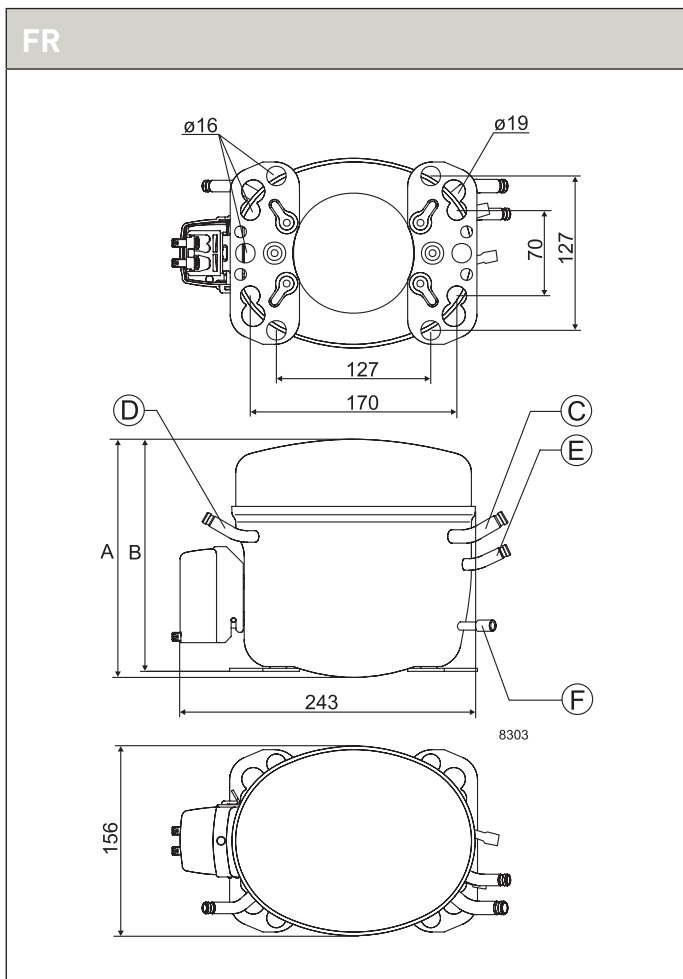

R134a • 220-240 V • 60 Hz • S-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C						MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C									
			-35	-15	-5	0	10	15	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
SC12FT	104G8205	LBP	125	477	761			272	0.91	608	1.33			156	592	947				
SC12FT	104G8215	LBP	125	477	761			272	0.91	608	1.33			156	592	947				
SC15FT	104G8505	LBP	154	571	904			330	0.92	724	1.35			192	709	1124				
SC18FTX	104G8805	LBP	187	675	1071			390	0.93	857	1.38			234	838	1333				
SC21FTX	104G8106	LBP	240	800	1262			470	0.99	1012	1.43			298	991	1565				
SC10G	104G8000	LBP	27	314	569			132	0.63	432	1.27			35	390	706				
SC12G	104G8240	LBP	74	406	704			203	0.77	542	1.31			93	505	876				
SC12G	104G8245	MBP		370	696	907	1449			519	1.34	1157	2.07		461	866	1130	1808		
SC12G	104G8250	LBP	74	406	704			203	0.77	542	1.31			93	505	876				
SC15G	104G8520	LBP		515	863			262	0.79	677	1.34				640	1071				
SC15G	104G8526	MBP		468	834	1049	1567			641	1.37	1292	2.01		583	1037	1305	1956		
SC18G	104G8823	MBP		573	955	1207	1858			745	1.46	1506	2.13		712	1188	1502	2318		
SC18G	104G8820	LBP		623	1021			338	0.88	807	1.31				772	1266				
SC18G	104G8830	LBP		623	1021			338	0.88	807	1.31				772	1266				
SC21G	104G8140	LBP		655	1145			303	0.80	880	1.36				816	1421				
SC10GH	104G8041	HBP		318	541	683	1042	1265		421	1.24	849	1.71		400	676	854	1305	1586	
SC12GH	104G8261	HBP		371	680	880	1393	1714		511	1.31	1116	2.01		462	845	1095	1737	2141	
SC15GH	104G8561	HBP		425	776	1012	1629	2019		582	1.37	1295	2.03		525	964	1259	2032	2523	
SC18GH	104G8861	HBP		573	955	1207	1858	2268		745	1.46	1506	2.13		712	1188	1502	2318	2834	
SC18MFX	104G8804	MBP		668	1067	1322	1968			851	1.45	1621	2.03		827	1324	1642	2451		

R134a • 220-240 V • 60 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
SC12FT	104G8205	103N0011							117U6003	117U5017			103N1004	103N2009
SC12FT	104G8215	103N0011							117U6003	117U5017			103N1004	103N2009
SC15FT	104G8505	103N0011							117U6005	117U5017			103N1004	103N2009
SC18FTX	104G8805								117U6019	117U5017			103N1004	103N2009
SC21FTX	104G8106									117U5373	117-7039		103N1004	103N2008
SC10G	104G8000	103N0011							117U6002	117U5017			103N1004	103N2009
SC12G	104G8240	103N0011							117U6003	117U5017			103N1004	103N2008
SC12G	104G8245								117U6011	117U5017			103N1004	103N2008
SC12G	104G8250	103N0011							117U6003	117U5017			103N1004	103N2009
SC15G	104G8520								117U6005	117U5017			103N1004	103N2009
SC15G	104G8526								117U6011	117U5017			103N1004	103N2008
SC18G	104G8823									117U5373	117-7039		103N1004	103N2008
SC18G	104G8820								117U6019	117U5017			103N1004	103N2009
SC18G	104G8830								117U6019	117U5017			103N1004	103N2009
SC21G	104G8140									117U5373	117-7029		103N1004	103N2009
SC10GH	104G8041								117U6005	117U5017			103N1004	103N2008
SC12GH	104G8261								117U6011	117U5017			103N1004	103N2008
SC15GH	104G8561								117U6011	117U5017			103N1004	103N2008
SC18GH	104G8861									117U5373	117-7039		103N1004	103N2008
SC18MFX	104G8804										117-7027		103N1004	103N2008

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
375	1.19	799	1.64				1/3	12.87	198-254 V, 60 Hz *	F1	209	203	8.2	6.2	6.2		X	4 6 10
375	1.19	799	1.64				1/3	12.87	198-254 V, 60 Hz *	F1	209	203	8.2	6.2	6.2	6.2	X	4 6 10
453	1.20	950	1.67				1/2	15.28	198-254 V, 60 Hz *	F2	209	203	10.2	6.2	6.2		X	4 10
536	1.21	1125	1.72				1/2	17.69	198-254 V, 60 Hz *	F2	219	213	10.2	6.2	6.2		X	4 10
642	1.29	1322	1.74			10	3/4	20.95	187-254 V, 60 Hz	F2	219	213	10.2	6.2	6.2		X	4 10
197	0.87	588	1.64				1/6	10.29	198-254 V, 60 Hz *	F2	199	193	8.2	6.2	6.2		X	4 6 10
289	1.03	731	1.65				1/4	12.87	198-254 V, 60 Hz *	F2	209	203	8.2	6.2	6.2		X	4 6 10
		716	1.70	1451	2.54		1/2	12.87	187-254 V, 60 Hz	F2	209	203	10.2	6.5	6.5		X	3
289	1.03	731	1.65				1/4	12.87	198-254 V, 60 Hz *	F2	209	203	8.2	6.2	6.2	6.2	X	4 6 10
372	1.07	900	1.69				1/3	15.28	198-254 V, 60 Hz *	F2	209	203	10.2	6.2	6.2		X	4 10
		866	1.72	1597	2.46		1/2	15.28	187-254 V, 60 Hz	F2	209	203	10.2	6.5	6.5		X	3
		994	1.82	1876	2.59	10	3/4	17.69	187-254 V, 60 Hz	F2	219	213	10.2	6.5	6.5		X	3
469	1.13	1064	1.63				1/2	17.69	198-254 V, 60 Hz *	F2	219	213	10.2	6.2	6.2		X	4 10
469	1.13	1064	1.63				1/2	17.69	198-254 V, 60 Hz *	F2	219	213	10.2	6.2	6.2	6.2	X	4 10
446	1.08	1186	1.72			10	1/2	20.95	198-254 V, 60 Hz *	F2	219	213	10.2	6.2	6.2		X	4 10
		566	1.53	1059	2.09		1/3	10.29	198-254 V, 60 Hz *	F2	209	203	10.2	6.2	8.2		X	8
		700	1.67	1398	2.46		1/2	12.87	198-254 V, 60 Hz *	F2	209	203	10.2	6.2	8.2		X	8
		797	1.72	1627	2.47		1/2	15.28	198-254 V, 60 Hz *	F2	209	203	10.2	6.2	8.2		X	8
		994	1.82	1876	2.59	10	3/4	17.69	198-254 V, 60 Hz *	F2	219	213	10.2	6.2	8.2		X	8
529	1.26	1116	1.80	2000	2.45	10	3/4	17.69	187-254 V, 60 Hz *	F2	219	213	10.2	6.2	6.2			3 10 11

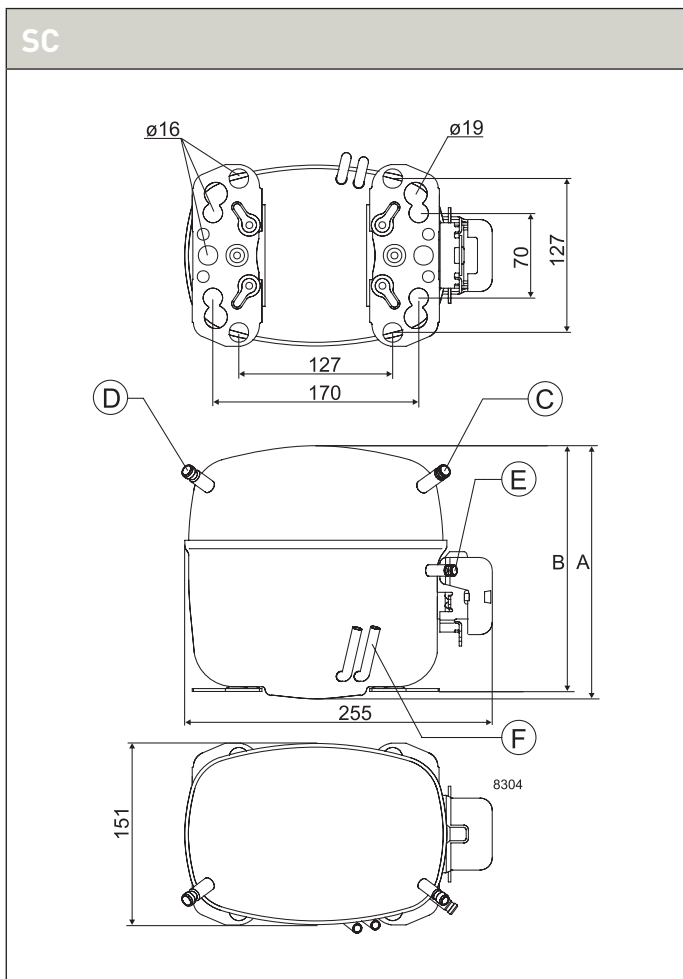

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R404A/R507

220-240 V | 60 Hz



N-Series.....	138-139
S-Series.....	140-141
G-Series.....	142-143

Chemical formula

R404A: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3 / \text{CH}_2\text{FCF}_3$
 R507: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3$

Typelabel

Typelabel stripe colour: Lilac
 Typelabel colour: Yellow

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSCR: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
 O = Oil cooling
 F_1 = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
 F_2 = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
 LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
 To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
 HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
 • Compressor restart possible after a few seconds
 • Operational wattage loss reduced by 2 watt
 • PTC protection screen not needed (surface temp. < 82 °C)
 • Temperature resistant up to min. +60 °C
 • Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
 1 Watt = 3.41 Btu/h







R404A/R507 • 220-240 V • 60 Hz • N-Series

Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]	
NF7MLX	105F3721	MBP		618	940	1137				666	1.34	1041	1.51		663	1031	1259			
NL6.1MLX	105F3611	MBP		507	771	932				546	1.41	854	1.65		544	846	1032			

R404A/R507 • 220-240 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades		Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
NF7MLX	105F3721								117U4139	117U5018			117U0349	117U1021
NL6.1MLX	105F3611								117U6022	117U5015			103N1010	103N2011

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]	Connectors location/I.D. [mm]				alt. connectors available		
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]							Suction C	Process D	Dis-charge E	Oil cooler F			
427	1.16	842	1.61	1441	2.12		1/2	7.27	187-254 V, 60 Hz *	F2	203	197	9.7	6.5	6.5		X	10 11
350	1.24	690	1.67	1182	2.29		1/3	6.13	187-254 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			10 11

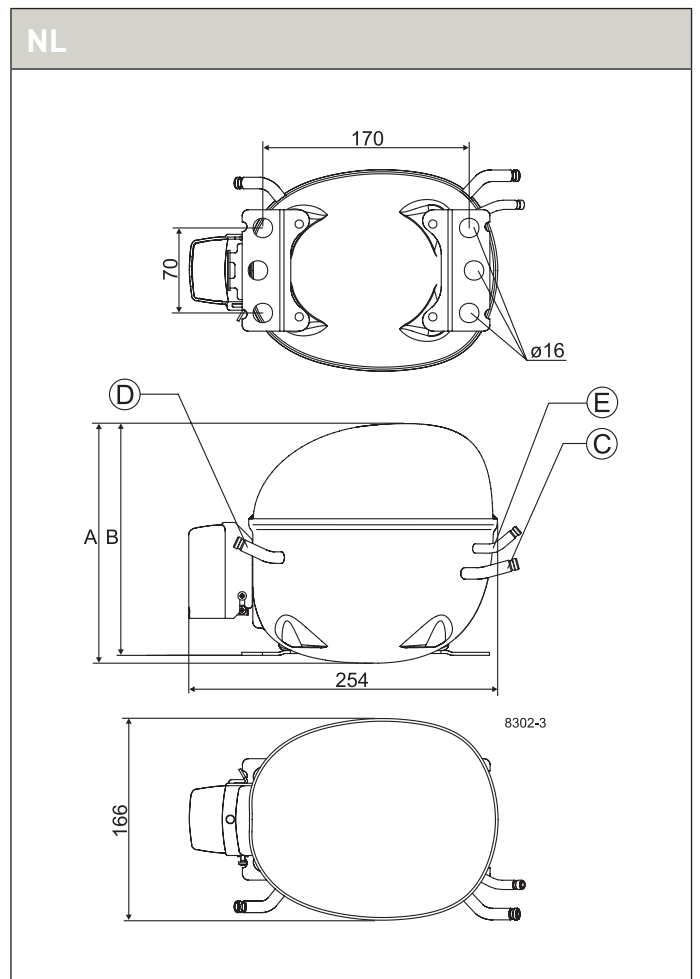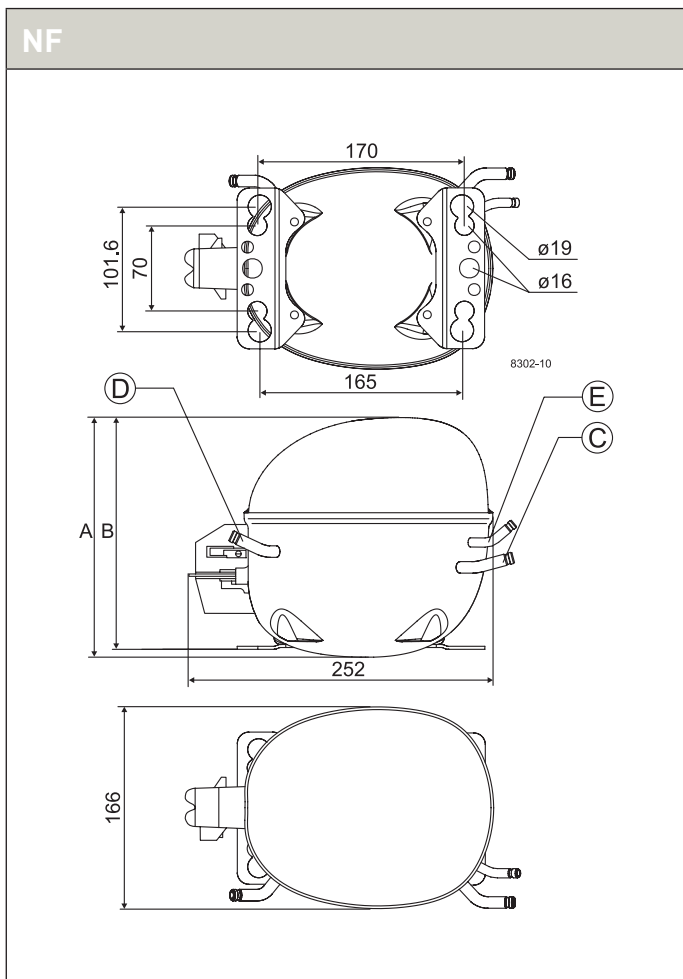

R404A/R507 • 220-240 V • 60 Hz • S-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]						
			LBP rating point -35°C / 40°C			MBP rating point -10°C / 45°C			HBP rating point 5°C / 50°C			T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C		Evaporating temperature [°C]							
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]	[W]
SC10CLX	104L2533	LBP	224	738						244	0.72	786	1.20			156	817				
SC12CLX	104L2695	LBP	282	972						303	0.74	1041	1.26			226	1098				
SC15CLX	104L2854	LBP	351	1158						391	0.85	1229	1.35			235	1215				
SC12CLX.2	104L2697	LBP	343	1011						351	0.85	1083	1.32			317	1087				
SC12CLX.2	104L2699	LBP	343	1011						351	0.84	1083	1.46			317	1087				
SC15CLX.2	104L2897	LBP	437	1239						444	0.91	1323	1.48			414	1339				
SC18CLX.2	104L2195	LBP	542	1410						547	0.91	1482	1.42			521	1556				
SC10MLX	104L2506	MBP		816	1246	1510						881	1.37	1371	1.52		843	1334	1637		
SC12MLX	104L2606	MBP		970	1465	1770						1040	1.35	1605	1.49		1011	1576	1925		
SC18MLX	104L2138	MBP		1412	2106	2538						1502	1.26	2337	1.47		1523	2331	2843		
SC15MLX.2	104L2803	MBP		1145	1737	2107						1230	1.36	1934	1.62		1235	1898	2323		
SC12/12CLX	104L4034	LBP	561	1935						602	0.73	2072	1.25			451	2185				

R404A/R507 • 220-240 V • 60 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info					Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)	Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades	Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
SC10CLX	104L2533							117U6005	117U5017			103N1004	103N2008	
SC12CLX	104L2695							117U6019	117U5017			103N1004	103N2008	
SC15CLX	104L2854								117U5373	117-7039		103N1004	103N2008	
SC12CLX.2	104L2697							117U6019	117U5017			103N1004	103N2008	
SC12CLX.2	104L2699									117-7027		103N1004	103N2008	
SC15CLX.2	104L2897								117U5373	117-7039		103N1004	103N2008	
SC18CLX.2	104L2195								117U5373	117-7066		103N1004	103N2008	
SC10MLX	104L2506							117U6011	117U5017			103N1004	103N2008	
SC12MLX	104L2606							117U6011	117U5017			103N1004	103N2008	
SC18MLX	104L2138									117-7066		103N1004	103N2008	
SC15MLX.2	104L2803									117-7058		103N1004	103N2008	
SC12/12CLX	104L4034							117U6019	117U5017			103N1004	103N2009	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [µF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		alt. connectors available
518	1.16						1/2	10.29	198-254 V, 60 Hz *	F2	209	203	8.2	6.2	6.2		X	4 10
699	1.23						3/4	12.87	198-254 V, 60 Hz	F2	219	213	8.2	6.2	6.2		X	4 6
775	1.23					10	3/4	15.28	198-254 V, 60 Hz	F2	219	213	10.2	6.2	6.2			4 6
708	1.20						3/4	12.87	198-254 V, 60 Hz *	F2	219	213	8.2	6.2	6.2		X	4 6
708	1.27					10	3/4	12.87	187-254 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	4 6
883	1.33					10	3/4	15.28	187-254 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	4 6
1115	1.40					10	1	17.69	187-254 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	4 6
531	1.15	1086	1.58	1884	2.09		3/4	10.29	187-254 V, 60 Hz *	F2	209	203	8.2	6.5	6.5			10 11
651	1.18	1285	1.57	2206	2.05		3/4	12.87	187-254 V, 60 Hz *	F2	219	213	8.2	6.5	6.5			10 11
1034	1.18	1904	1.52	3259	2.07	10	1	17.69	187-254 V, 60 Hz	F2	219	213	9.7	6.5	6.5			10 11
842	1.20	1549	1.61	2677	2.24	15	3/4	15.28	187-254 V, 60 Hz	F2	219	213	10.2	6.5	6.5			10 11
1391	1.23						1 1/4	25.74	198-254 V, 60 Hz	F2	259	254	12.0	6.2	6.2			4

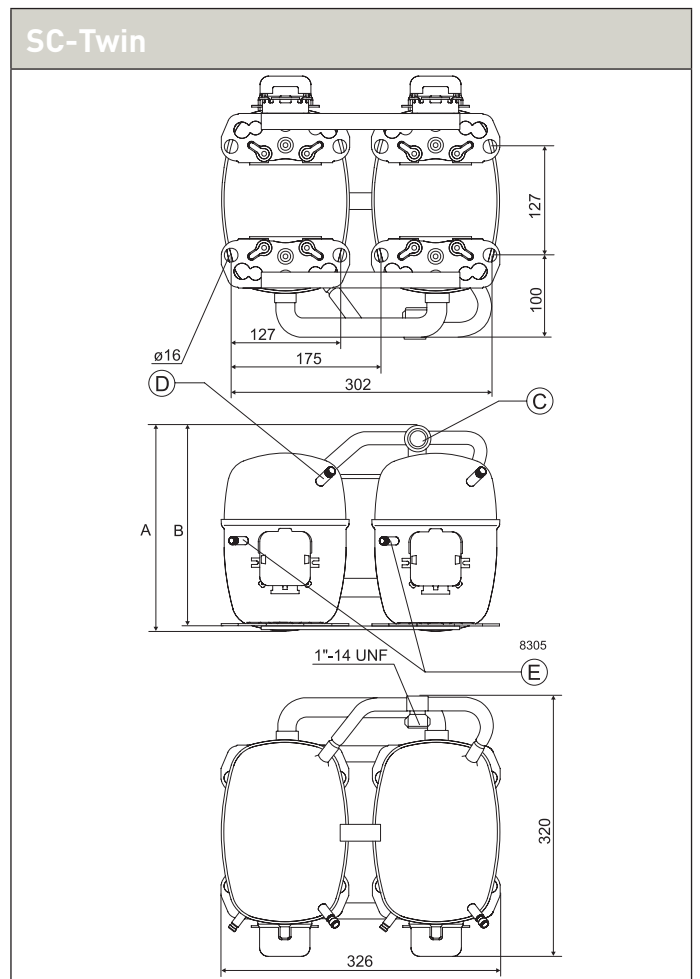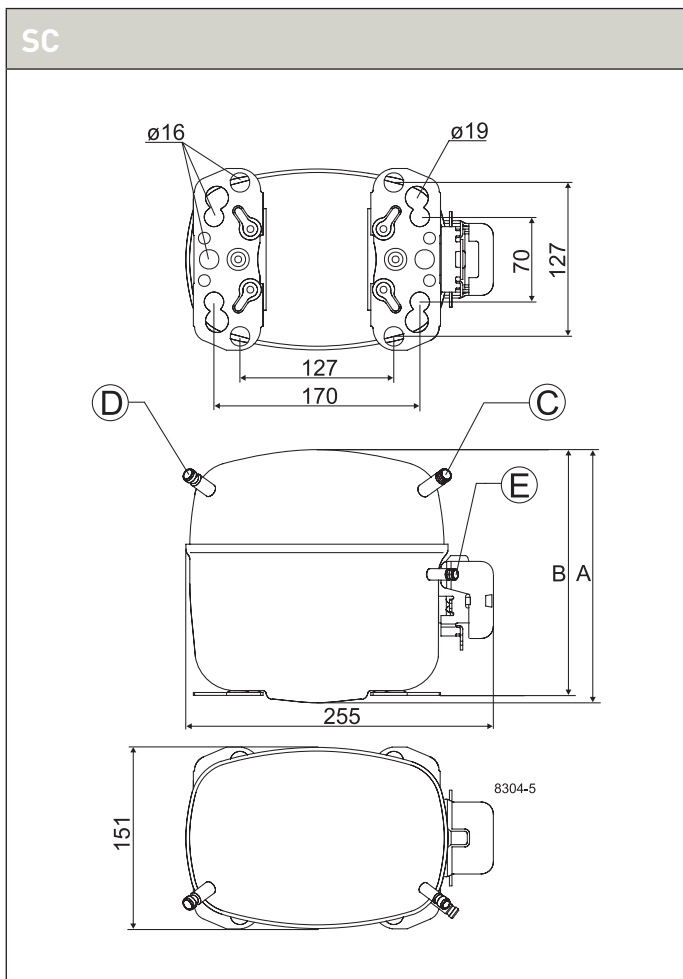

R404A/R507 • 220-240 V • 60 Hz • G-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]
GS21CLX	107B0506	LBP	655	1937					669	1.05	2084	1.65			630	2080				
GS26CLX	107B0505	LBP	755	2001					773	0.89	2135	1.27			720	2117				
GS21MLX	107B0509	MBP		1939	2950	3578					2088	1.68	3227	1.95		2046	3138	3825		

R404A/R507 • 220-240 V • 60 Hz • G-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
GS21CLX	107B0506											117-7056		107B9101	
GS26CLX	107B0505											117-7073		107B9101	
GS21MLX	107B0509											117-7073		107B9106	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						Suction C	Process D	Dis-charge E	Oil cooler F	alt. connectors available			
1360	1.53					10	1 1/4	21.20	187-254 V, 60 Hz	F2	259	247	12.9	6.5	8.2			4
1427	1.22					20	1 1/4	26.30	187-254 V, 60 Hz	F2	279	267	12.9	6.5	8.2			4
		2564	1.92	4391	2.65	20	1 1/4	21.20	187-254 V, 60 Hz	F2	279	267	12.9	6.5	9.7			4 10

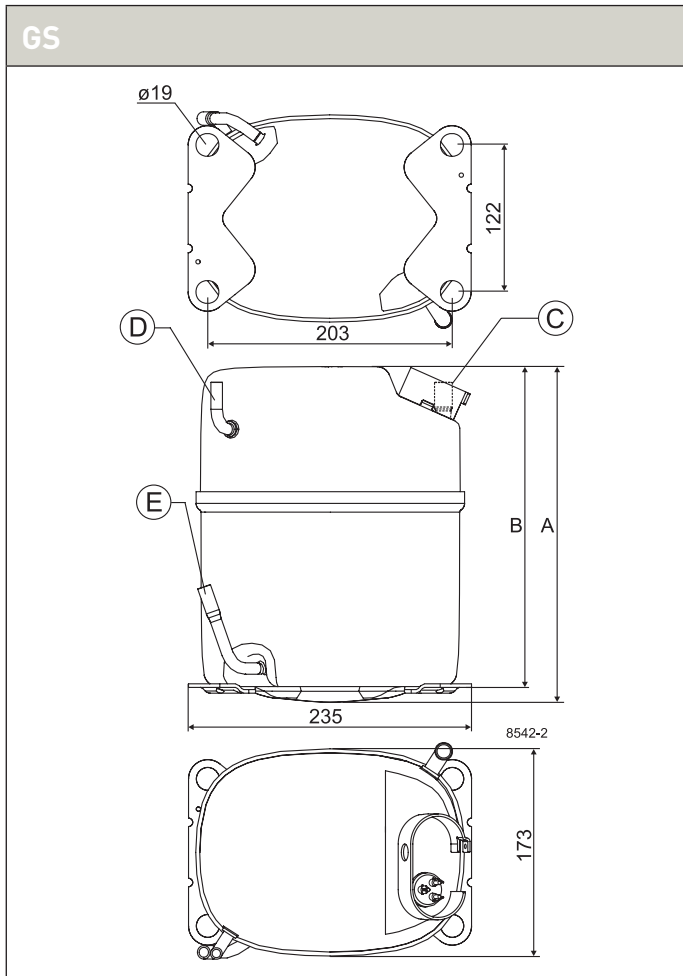

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R134a

115 V | 60 Hz



P-Series	146-147
T-Series	148-149
N-Series	150-151
F-Series	152-153
S-Series	154-155

Chemical formula

CH₂FCF₃

Typelabel

Typelabel stripe colour: Blue
Typelabel colour: Green

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSRC: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R134a • 115 V • 50 - 60 Hz • P-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]
PL30F	101G9100	L/M/HBP		44	78	99	154	189	21	0.42	59	0.95	125	1.58		55	97	124	193	236
PL50F	101G9202	L/MBP		69	111	138			37	0.59	88	1.05				85	138	171		

R134a • 115 V • 50 - 60 Hz • P-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info				Run capacitor (RC)	HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST		
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)	Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover
		Spades		Spades		Spades	Spades	Spades		Spades			
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	
PL30F	101G9100	103N0026	103N0023					117U6000	117U5015			103N1010	103N0492
PL50F	101G9202	103N0026	103N0023					117U6000	117U5015			103N1010	103N0492

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F		alt. connectors available
30	0.60	80	1.23	156	1.94		1/10	1.41	90-127 V, 60 Hz *	S	134	132	6.5	6.5	5.0			1 5
52	0.79	117	1.33				1/10	2.00	103-127 V, 60 Hz	S	134	132	6.5	6.5	5.0			1 5

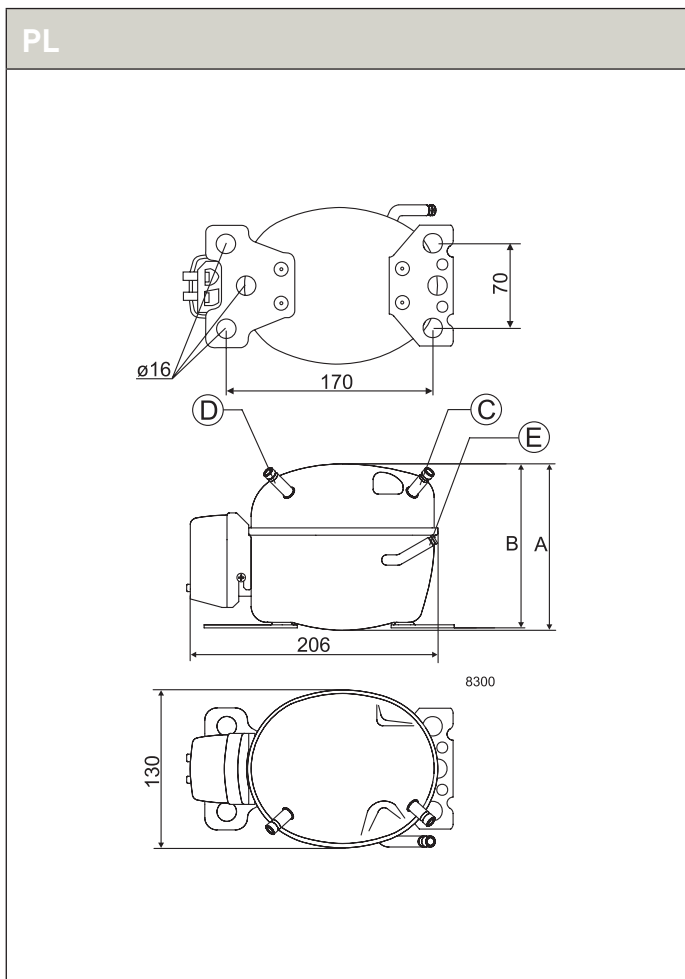



R134a • 115 V • 60 Hz • T-Series

Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54,4°C, T _{liq} =32,2°C, T _{suc} =32,2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C		Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
			-35	-15	-5	0	10	15												
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]			
TF3.5F	102G3304	LBP	30	119					64	0.72	155	1.20			38	147				
TFS4F	102G3431	LBP	35	142					75	0.82	186	1.34			44	176				
TFS4.5FT	102G3432	L/MBP	56	180	290	358			102	0.84	231	1.27	435	1.69	70	223	360	444		
TFS4.5FT	102G3433	LBP	56	180					102	0.84	231	1.27			70	223				
TL2.5F	102G3206	LBP		80	134				43	0.70	105	1.11				99	167			
TL3F	102G3300	LBP		97	163				54	0.75	127	1.11				121	203			
TL4F	102G3402	LBP	42	120					66	0.77	159	1.21			52	149				
TL2.5G	102G3255	L/M/HBP		79	144	186	289	350	39	0.57	108	1.14	234	1.85		99	179	231	360	436
TL4G	102G3460	L/M/HBP		123	211	268	408	493	64	0.71	163	1.20	333	1.76		153	263	333	508	615
TLS4.5F	102G3420	LBP	56	180	290				102	0.83	231	1.26			70	223	360			
TT2.5F	102G3248	LBP		80	134				43	0.70	105	1.11				99	167			
TTE4F	102G3444	LBP	36	152					84	0.94	195	1.46			45	189				
TTE4.6FK	102G3448	LBP	50	184					106	1.06	235	1.57			62	229				
TTY5F	102G3546	LBP	62	224					126	1.05	289	1.59			77	278				

R134a • 115 V • 60 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TF3.5F	102G3304													117U0349	117U1021
TFS4F	102G3431													117U0349	117U1021
TFS4.5FT	102G3432								117U4126	117U5022				117U0349	117U1021
TFS4.5FT	102G3433													117U0349	117U1021
TL2.5F	102G3206	103N0026	103N0023											103N1010	103N2011
TL3F	102G3300	103N0026	103N0023											103N1010	103N2011
TL4F	102G3402	103N0026	103N0023											103N1010	103N2011
TL2.5G	102G3255	103N0026	103N0023											103N1010	103N2011
TL4G	102G3460	103N0026	103N0023						117U6003	117U5023				103N1010	103N2011
TLS4.5F	102G3420	103N0026	103N0023						117U6003	117U5023				103N1010	103N2011
TT2.5F	102G3248	117U6102				117U3301									117U1026
TTE4F	102G3444			117U6102		117U3304	117-7118								117U1026
TTE4.6FK	102G3448			117U6106		117U3302	117-7118								117U1026
TTY5F	102G3546			117U6102		117U3302	117-7118								117U1026

ASHRAE						Run capacitor [* optional] [µF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application		
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]						
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		alt. connectors available	
90	0.96						1/10	3.59	95-135 V, 60 Hz	S	173	169	6.5	6.5	5.0			1 5	
105	1.08						1/10	3.86	95-135 V, 60 Hz	S	173	169	6.5	6.5	5.0			1 5	
140	1.10	304	1.56	531	2.00		1/6	4.63	95-135 V, 60 Hz	S	173	169	6.5	6.5	4.9		X	1 2	
140	1.10						1/8	4.63	95-135 V, 60 Hz	S	173	169	6.5	6.5	5.0		X	1 2	
60	0.92	140	1.37				1/10	2.61	103-127 V, 60 Hz	S	163	159	6.5	6.5	5.0			1 7	
74	0.97	170	1.38				1/10	3.13	103-127 V, 60 Hz	S	163	159	6.5	6.5	5.0			1 5	
91	1.00	214	1.52				1/10	3.86	103-127 V, 60 Hz	S	163	159	6.5	6.5	5.0		X	1 5	
56	0.78	148	1.48	291	2.26		1/10	2.61	103-127 V, 60 Hz	S	163	159	6.5	6.5	5.0		X	3	
90	0.94	219	1.51	413	2.13		1/8	3.86	90-135 V, 60 Hz *	S	173	169	6.5	6.5	5.0		X	3	
140	1.09	304	1.54				1/8	4.63	103-127 V, 60 Hz	S	163	159	6.5	6.5	5.0			1 2 5	
60	0.92	140	1.37				1/10	2.61	103-127 V, 60 Hz	S	158	152	6.5	6.5	4.9			1	
117	1.24						15	1/10	3.86	103-127 V, 60 Hz	S	173	169	6.5	6.5	5.0			1
145	1.38						15	1/8	4.63	103-127 V, 60 Hz	S	173	169	6.5	6.5	5.0			1 2
174	1.38						15	1/6	5.54	103-127 V, 60 Hz	S	173	169	6.5	6.5	4.9			1 2

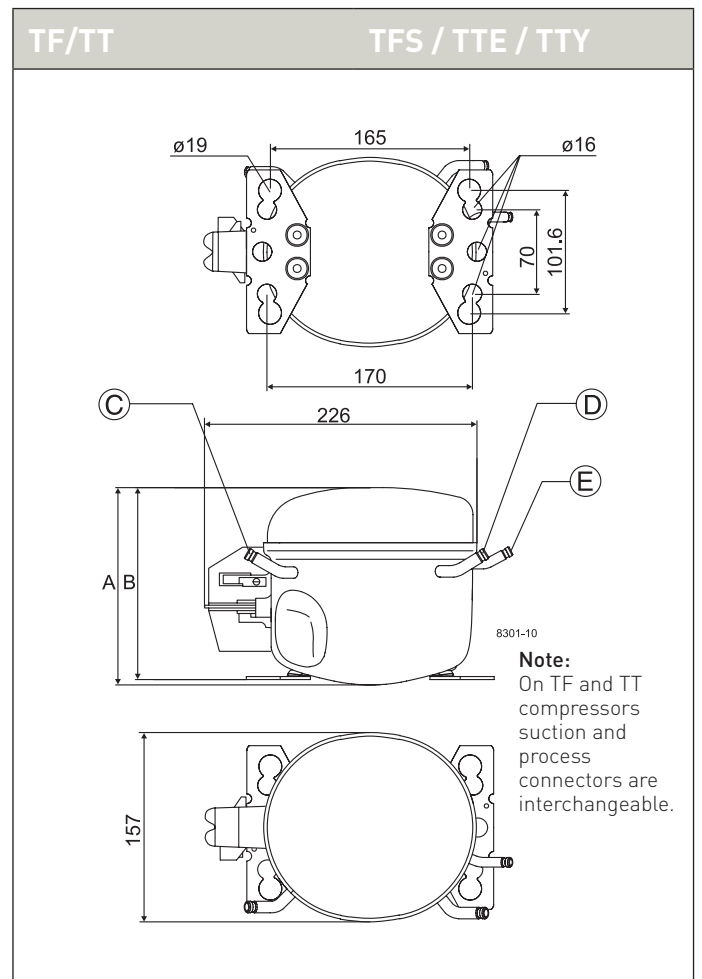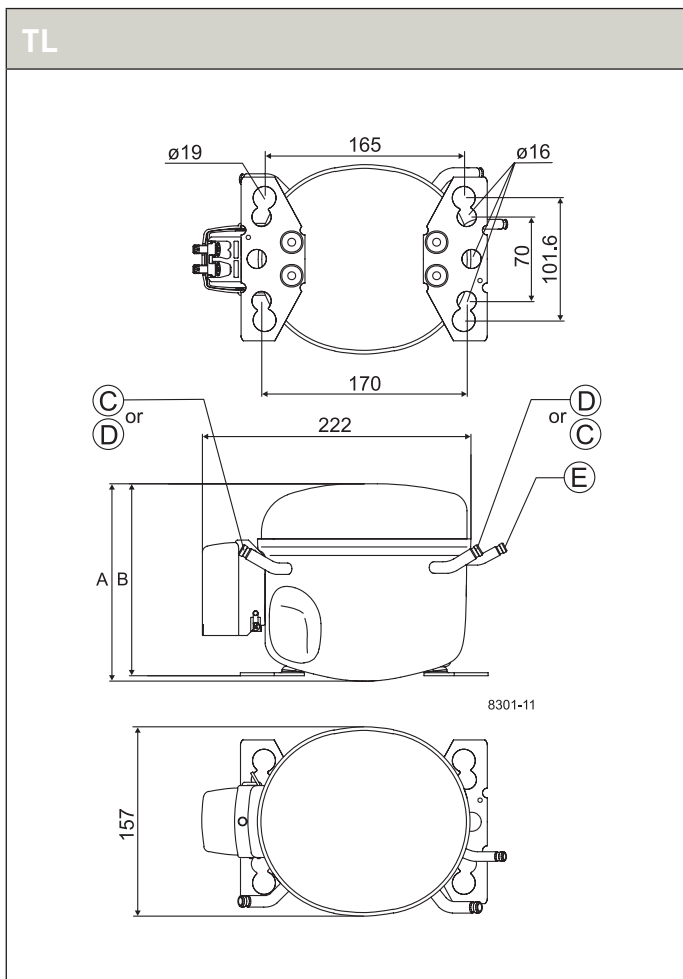

R134a • 115 V • 60 Hz • N-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
									LBP rating point -25°C / 55°C		MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C							
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
									[W]	[W/W]	[W]	[W/W]	[W]	[W/W]						
NF6FK	105G5628	L/MBP	63	249	397	490			143	0.88	317	1.30	599	1.91	79	309	493	610		
NF7FK	105G5728	L/MBP	91	302	473	583			180	0.93	380	1.33	711	1.90	112	374	587	724		
NF5.5FX	105G5623	L/MBP	66	260	414	511			148	0.93	330	1.38	624	2.02	83	322	514	635		
NF7FX	105G5723	L/MBP	93	311	488	601			186	0.90	392	1.34	733	1.95	116	385	605	746		
NF7FX	105G5733	L/MBP	93	311	488	601			186	0.90	392	1.34	733	1.95	116	385	605	746		
NF9FX	105G5920	L/MBP		344	548	677			202	0.86	437	1.34	826	1.90		426	679	840		
NF10FX	105G5941	L/MBP		386	610	752			227	0.91	488	1.34	919	1.86		476	756	934		
NF11FX	105G5945	MBP	114	410	653	808			237	0.84	521	1.27	988	1.77	140	506	809	1003		
NF6.1FX.2	105G5631	L/MBP	69	274	442	547			153	0.90	352	1.47	666	2.11	86	341	549	679		
NF7.3FX.2	105G5722	L/MBP	91	334	532	656			190	0.88	426	1.40	796	2.00	114	414	661	814		
NF8.4FX.2	105G5918	L/MBP		381	603	741			221	0.94	484	1.43	899	2.00		473	749	920		
NF11FX.2	105G5916	MBP		485	772	950					618	1.36	1154	1.91		603	959	1180		
NLV6.1F 2000	105G5660	L/MBP	43	158	257	319			89	1.16	204	1.78	392	2.61	53	196	319	397		
NLV6.1F 3000	105G5660	L/MBP	70	236	378	468			137	1.14	301	1.74	572	2.48	87	292	469	580		
NLV6.1F 3500	105G5660	L/MBP	88	285	453	560			167	1.12	362	1.66	683	2.33	109	353	562	694		
NLV6.1F 4000	105G5660	L/MBP	93	314	502	622			182	1.07	400	1.61	761	2.30	115	389	623	772		
NLV8.4F 2000	105G5960	L/MBP	68	219	348	430			129	1.18	278	1.69	525	2.32	84	271	432	533		
NLV8.4F 3000	105G5960	L/MBP	104	335	532	656			197	1.13	425	1.64	801	2.27	129	414	659	814		
NLV8.4F 3500	105G5960	L/MBP	119	382	607	749			225	1.11	485	1.60	914	2.21	148	473	752	929		
NLV8.4F 4000	105G5960	L/MBP	133	427	678	838			251	1.10	542	1.59	1022	2.20	165	529	841	1039		
NTY5.5FK	105G5620	LBP	90	256					151	1.14	329	1.59			111	318				
NTY9FK	105G5921	LBP	129	369					221	1.18	469	1.61			159	458				

R134a • 115 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NF6FK	105G5628								117U4132	117U5022			117U0349	117U1021	
NF7FK	105G5728								117U4132	117U5022			117U0349	117U1021	
NF5.5FX	105G5623								117U4127	117U5025			117U0349	117U1021	
NF7FX	105G5723								117U4061	117U5025			117U0349	117U1021	
NF7FX	105G5733								117U4061	117U5025			117U0349	117U1021	
NF9FX	105G5920								117U4129	117U5025			117U0349	117U1021	
NF10FX	105G5941								117U4129	117U5022			117U0349	117U1021	
NF11FX	105G5945								117U4123	117U5028			117U0349	117U1021	
NF6.1FX.2	105G5631								117U4127	117U5025			117U0349	117U1021	
NF7.3FX.2	105G5722								117U4061	117U5025			117U0349	117U1021	
NF8.4FX.2	105G5918								117U4129	117U5025			117U0349	117U1021	
NF11FX.2	105G5916								117U4151	117U5028			117U0349	117U1021	
NLV6.1F	105G5660								Electronic unit 105N4212						
NLV8.4F	105G5960														
NTY5.5FK	105G5620				117U6102			117U3306	117-7118					117U1026	
NTY9FK	105G5921				117U6102			117U3310	117-7118					117U1026	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] µF	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application		
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]						
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		alt. connectors available	
196	1.14	416	1.62	739	2.32		1/5	6.13	95-135 V, 60 Hz	F2	203	197	8.2	6.5	6.5		X	2	
245	1.20	496	1.66	876	2.30		1/4	7.27	95-135 V, 60 Hz	F2	203	197	8.2	6.5	6.5			2	
205	1.21	433	1.72	770	2.46		1/4	6.13	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	3	
253	1.18	512	1.67	903	2.36		1/4	7.27	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	3	
253	1.18	512	1.67	903	2.36		1/4	7.27	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5	6.5		3	
275	1.12	573	1.67	1017	2.28		1/3	8.35	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	3	
308	1.18	638	1.65	1132	2.24		1/3	10.09	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	3	
323	1.09	682	1.56	1219	2.14		1/2	11.15	95-135 V, 60 Hz	F2	203	197	8.2	6.5	6.5		X	3	
212	1.19	463	1.84	818	2.53		1/4	6.13	95-135 V, 60 Hz	F1	197	191	8.2	6.5	6.5			3	
263	1.16	558	1.75	978	2.41		1/3	7.27	95-135 V, 60 Hz	F1	197	191	8.2	6.5	6.5			3	
303	1.22	633	1.77	1102	2.39		1/3	8.35	95-135 V, 60 Hz	F1	197	191	8.2	6.5	6.5			3	
		810	1.70	1416	2.29		1/2	11.25	95-135 V, 60 Hz	F2	203	197	9.7	6.5	6.5		X	3	
123	1.52	268	2.22	483	3.18		1/7	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
187	1.49	395	2.16	704	3.00		1/7	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
228	1.45	474	2.06	840	2.81		1/7	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
249	1.39	525	2.00	937	2.78		1/7	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
176	1.52	364	2.08	645	2.78		1/5	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
268	1.47	556	2.03	985	2.73		1/5	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
307	1.43	635	1.98	1124	2.66		1/5	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
343	1.42	710	1.97	1257	2.64		1/5	8.35	80-140 V, 60 Hz *	F2	203	197	8.2	6.5	6.5			3	
205	1.48						15	1/5	6.13	103-127 V, 60 Hz	S	203	197	8.2	6.5	6.5			2
299	1.53						15	1/4	8.35	103-127 V, 60 Hz	S	203	197	8.2	6.5	6.5			2

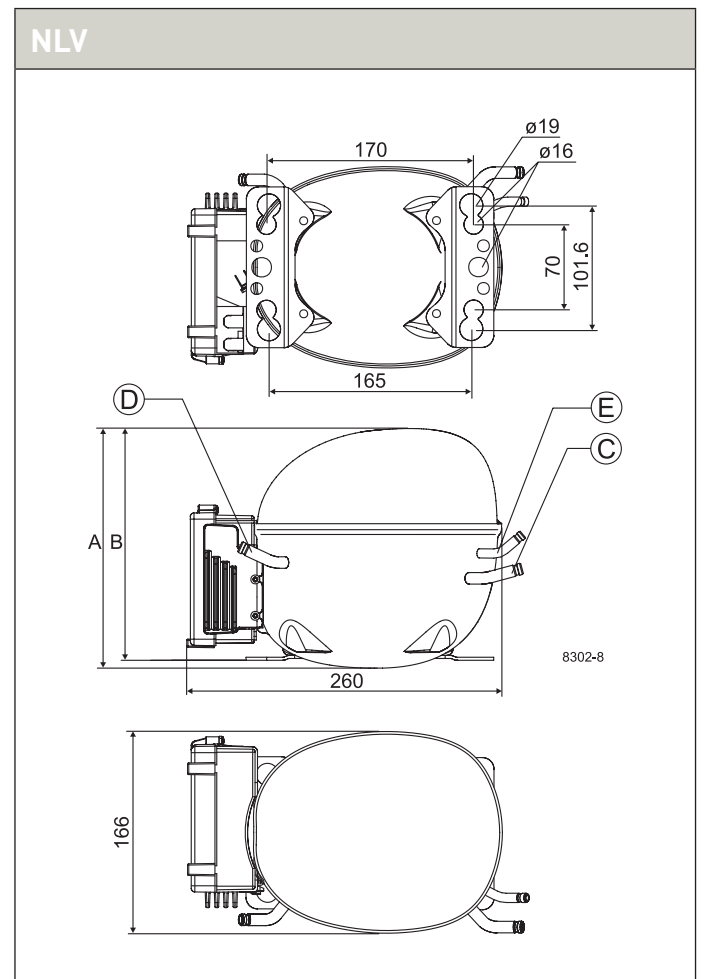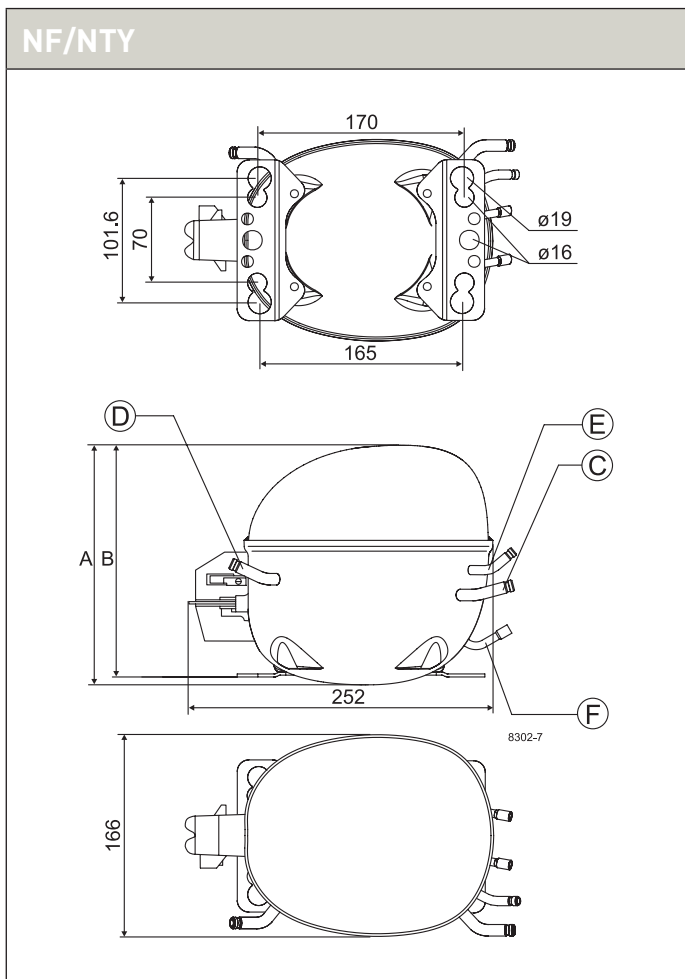

R134a • 115 V • 60 Hz • F-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]								
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C			-35		-15		-5		0		10		15	
			Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP	Cooling capacity		COP
			[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]
FF6GK	103G5680	L/M/HBP	187	345	445	685		83	0.68	259	1.28	558	1.97		234	430	553	852					
FF7.5GK	103G5780	L/M/HBP	221	391	498	753		106	0.77	299	1.30	618	1.89		274	485	617	935					
FF8.5GX	103G5880	L/M/HBP	268	454	569	841		139	0.70	354	1.18	698	1.73		332	563	706	1045					
FF10GX	103G5980	L/M/HBP	291	498	625	931		149	0.68	386	1.16	770	1.71		362	619	778	1159					

R134a • 115 V • 60 Hz • F-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
FF6GK	103G5680													117U0349	117U1021
FF7.5GK	103G5780													117U0349	117U1021
FF8.5GX	103G5880								117U4060	117U5041				117U0349	117U1021
FF10GX	103G5980								117U4061	117U5040				117U0349	117U1021

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						Suction	Process	Dis-charge	Oil cooler	alt. connectors available			
122	0.93	356	1.63	693	2.38		1/5	6.23	103-127 V, 60 Hz	F1	196	191	8.2	6.5	6.5			3
152	1.02	404	1.63	763	2.27		1/4	6.93	103-127 V, 60 Hz	F1	196	191	8.2	6.5	6.5			3
195	0.93	472	1.49	857	2.08		1/4	7.95	103-127 V, 60 Hz	F2	196	191	8.2	6.5	6.5			3
210	0.91	518	1.46	949	2.05		1/3	9.05	103-127 V, 60 Hz	F2	196	191	8.2	6.5	6.5			3

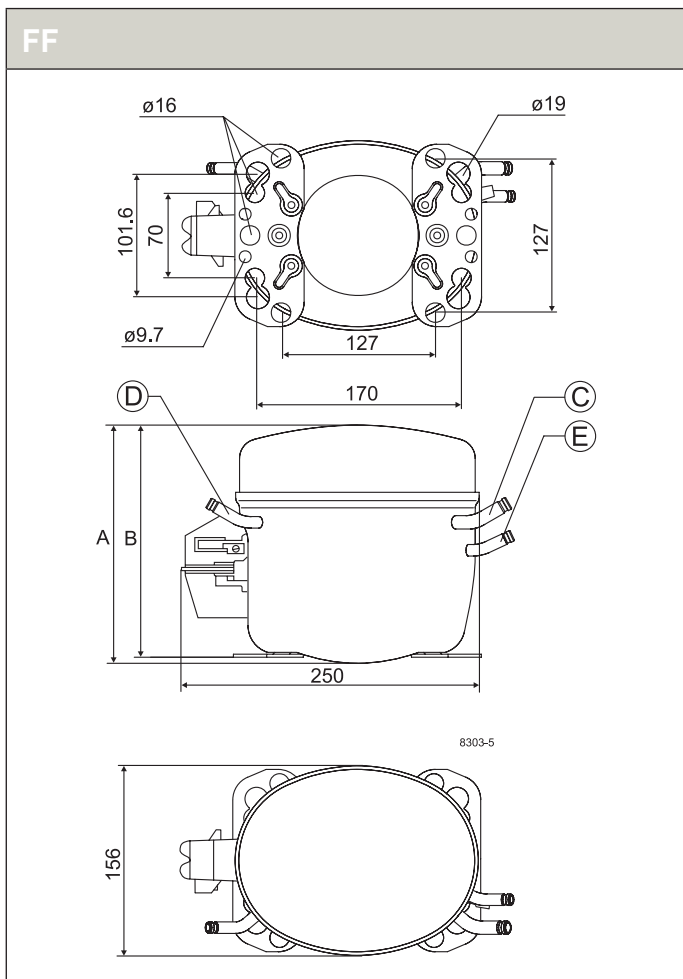

R134a • 115 V • 60 Hz • S-Series



Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C						MBP rating point -10°C / 55°C		HBP rating point 5°C / 55°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
									[W]	[W/W]	[W]	[W/W]	[W]	[W/W]						
SC15FTX	104G7505	LBP	158	571	898				332	0.87	722	1.23			199	707	1114			
SC12G	104G7250	L/M/HBP	43	422	729	924	1414		202	0.73	563	1.27	1151	1.90	60	528	909	1152	1765	
SC12G	104G7260	L/M/HBP	43	422	729	924	1414		202	0.73	563	1.27	1151	1.90	60	528	909	1152	1765	
SC15G	104G7550	L/M/HBP		502	876	1099	1639		190	0.67	679	1.24	1352	1.78		625	1087	1364	2039	
SC18G	104G7800	L/M/HBP		592	995	1238	1829	2187	264	0.71	782	1.23	1514	1.72		740	1240	1542	2282	2734
SC15MFX	104G7520	MBP		532	916	1142	1666				713	1.37	1392	1.96		664	1140	1423	2079	

R134a • 115 V • 60 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
SC15FTX	104G7505								117U6020	117U5023			103N1004	103N2008	
SC12G	104G7250								117U6020	117U5023			103N1004	103N2008	
SC12G	104G7260								117U6020	117U5023			103N1004	103N2008	
SC15G	104G7550								117U6020	117U5023			103N1004	103N2008	
SC18G	104G7800								117-7441	117U5042	117-7053			117U1021	
SC15MFX	104G7520								117U6020	117U5023			103N1004	103N2008	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]	Connectors location/I.D. [mm]				Oil cooler alt. connectors available		
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]							Suction C	Process D	Dis-charge E	F			
456	1.13	942	1.51				1/2	15.28	90-135 V, 60 Hz *	F2	209	203	8.2	6.5	6.5		X	4
296	0.99	760	1.61	1432	2.31		1/2	12.87	103-127 V, 60 Hz	F1	209	203	8.2	6.5	6.5		X	3
296	0.99	760	1.61	1432	2.31		1/2	12.87	103-127 V, 60 Hz	F1	209	203	8.2	6.5	6.5	6.5		3
304	0.95	910	1.55	1666	2.15		1/2	15.28	103-127 V, 60 Hz	F1	209	203	8.2	6.5	6.5		X	3
400	0.99	1042	1.53	1868	2.08		3/4	17.69	95-135 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	3
357	1.04	956	1.72	1713	2.37		1/2	15.28	95-135 V, 60 Hz	F2	209	203	9.7	6.5	6.5			4

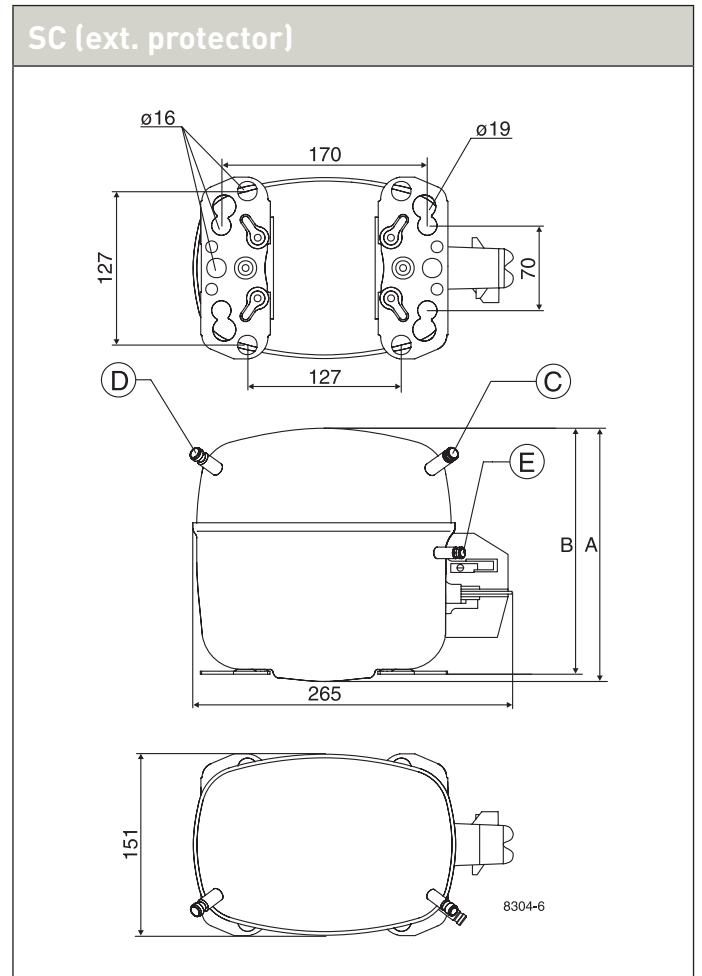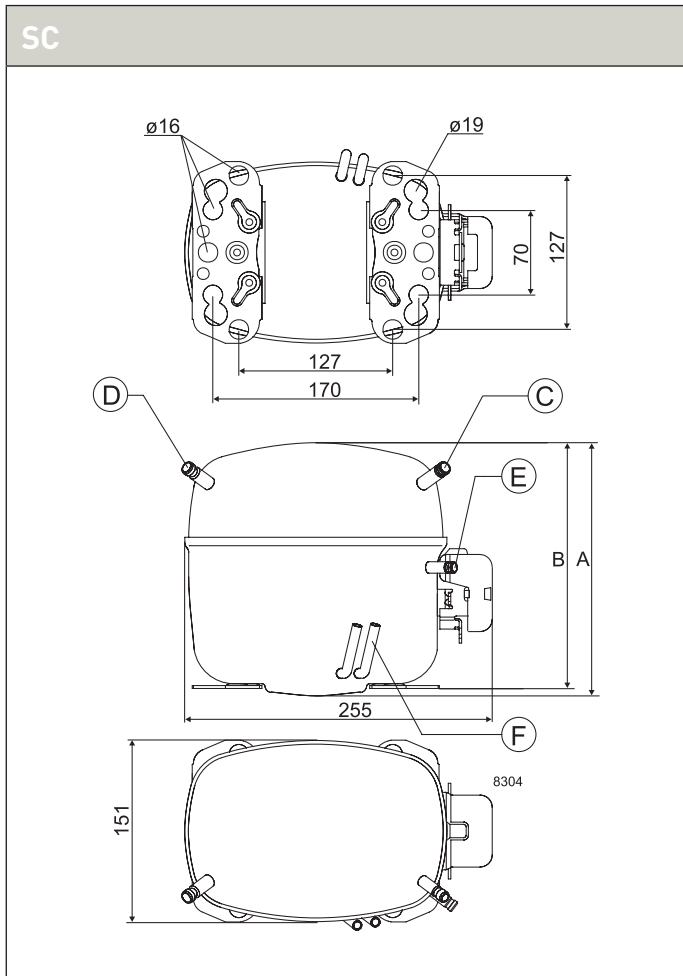


With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R600a

115 V | 60 Hz



N-Series..... 158-159

Chemical formula

C_4H_{10}

Typelabel

Typelabel stripe colour: Red
Typelabel colour: Green

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSRC: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC

- Compressor restart possible after a few seconds
- Operational wattage loss reduced by 2 watt
- PTC protection screen not needed (surface temp. < 82 °C)
- Temperature resistant up to min. +60 °C
- Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R600a • 115 V • 60 Hz • N-Series


Compressor	Code number	Application	CECOMAF Capacity [W] T _c =55°C, T _{liq} =55°C, T _{suc} =32°C Evaporating temperature [°C]						CECOMAF						ASHRAE Capacity [W] T _c =54,4°C, T _{liq} =32,2°C, T _{suc} =32,2°C Evaporating temperature [°C]					
			LBP rating point -25°C / 55°C			MBP rating point -10°C / 55°C			HBP rating point 5°C / 55°C											
			-35	-15	-5	0	10	15	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
NLE11KTK	105H5942	L/MBP	87	255	395	470			145	0.95	322	1.42	544	1.83	106	310	482	574		
NLE13KTK	105H5949	L/MBP	100	284	441	535			170	0.95	357	1.37	638	1.78	122	346	538	653		

R600a • 115 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info				Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST		
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)	Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades	Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm		
NLE11KTK	105H5942	103N0026	103N0023	103N0027	103N0024		117-7118	117-7120					103N1010	103N2010
NLE13KTK	105H5949	103N0026	103N0023	103N0027	103N0024		117-7118	117-7120					103N1010	103N2010

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F	
196	1.23	414	1.72			*	1/5	11.15	95-135 V, 60 Hz	F1	197	191	8.2	6.5	6.5		2 4
227	1.21	460	1.66			*	1/5	13.25	95-135 V, 60 Hz	F1	197	191	8.2	6.5	6.5		2 4

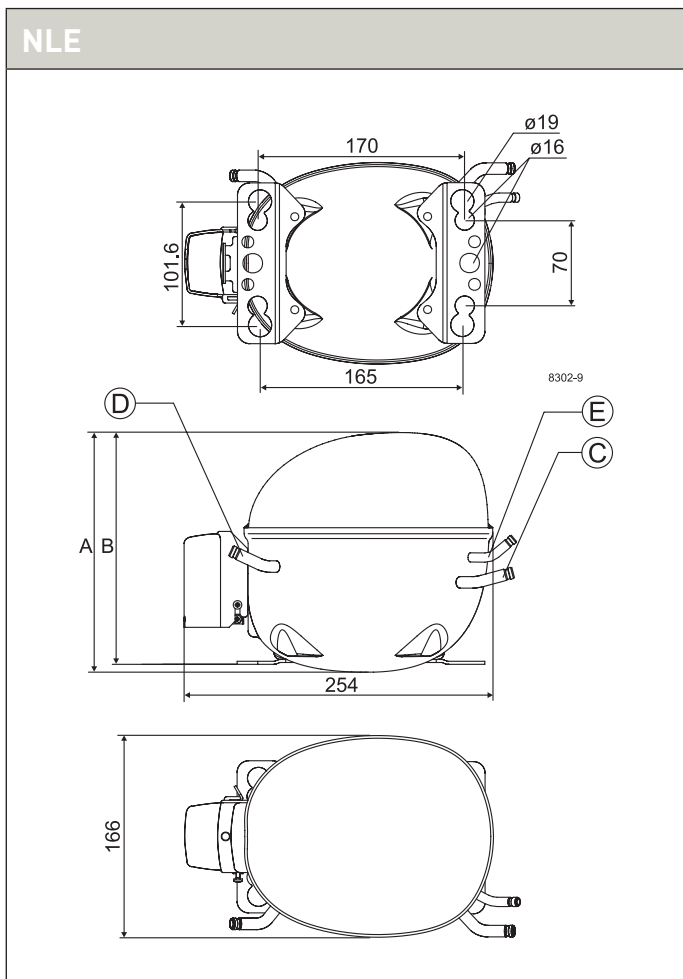

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R404A/R507

115 V | 60 Hz



T-Series	162-163
N-Series.....	164-165
S-Series	166-167

Chemical formula

R404A: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3 / \text{CH}_2\text{FCF}_3$
R507: $\text{CHF}_2\text{CF}_3 / \text{CH}_3\text{CF}_3$

Typelabel

Typelabel stripe colour: Lilac
Typelabel colour: Green

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSCR: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices


LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h



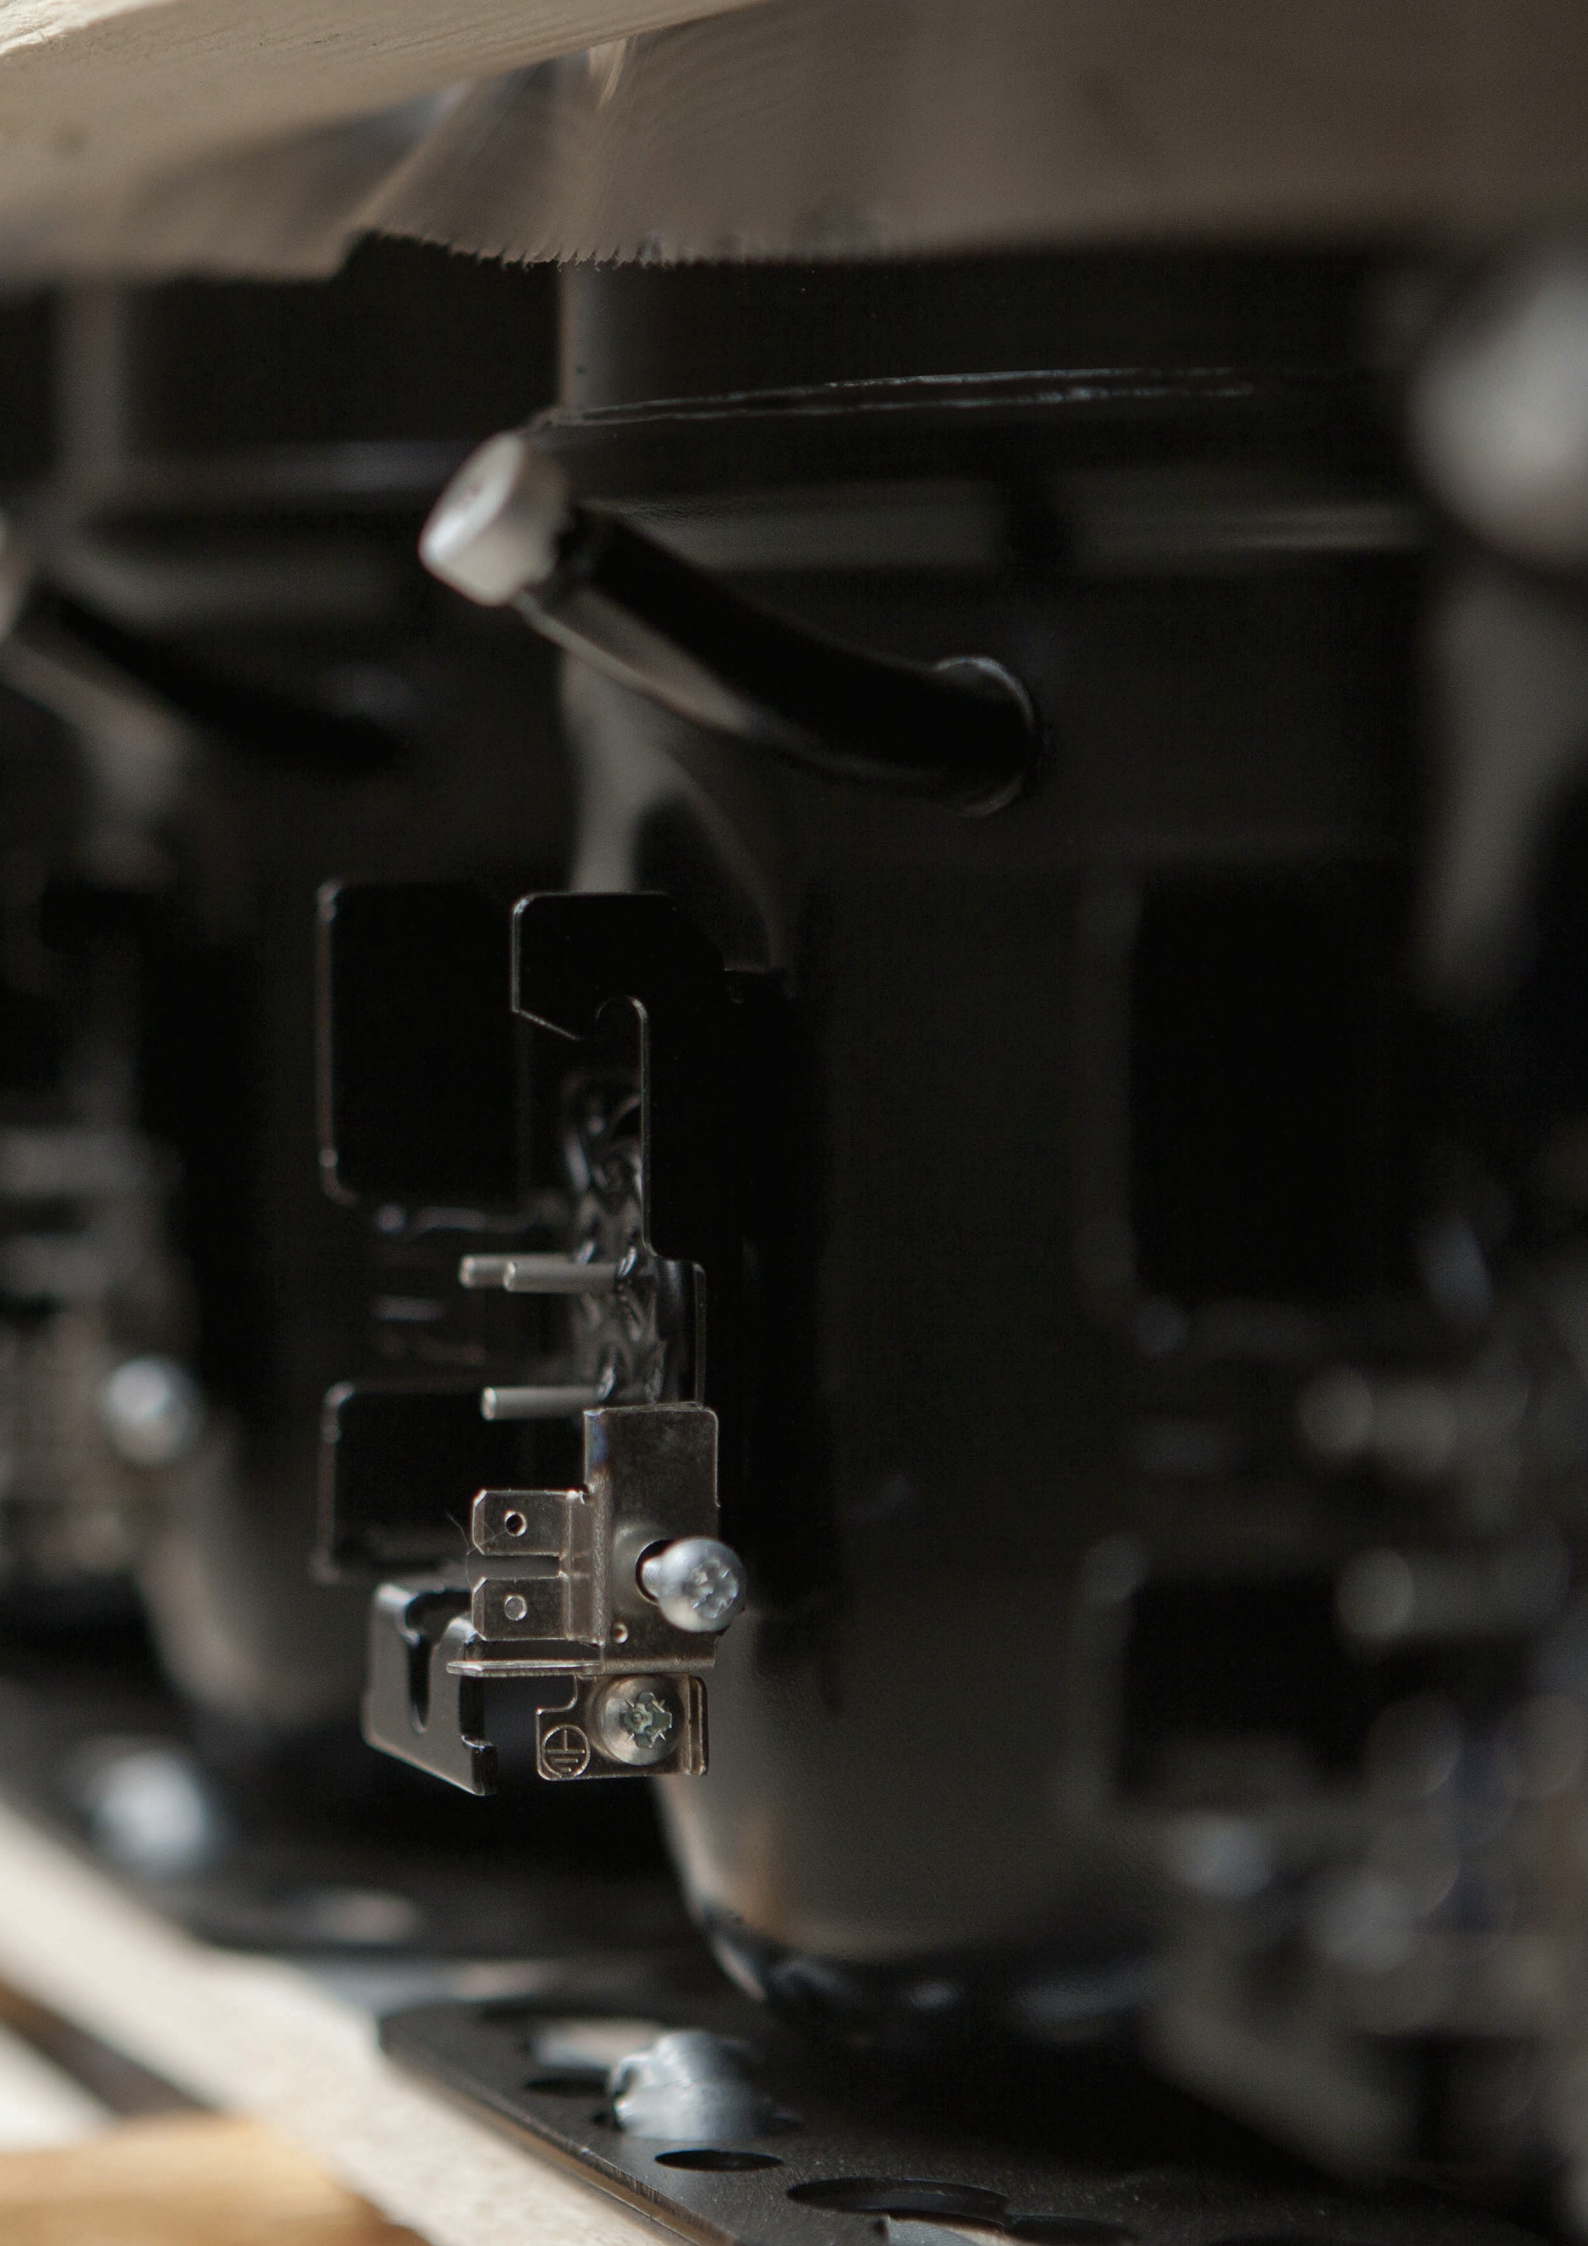

R404A/R507 • 115 V • 60 Hz • T-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C			HBP rating point 5°C / 50°C			T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]
TF4CLX	102U2102	L/MBP	101	285	427	513			101	0.71	305	1.21	470	1.23	100	311	475	576		
TFS4.5CLX	102U2103	LBP	137	366					137	0.83	388	1.18			140	402				

R404A/R507 • 115 V • 60 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TF4CLX	102U2102								117U4148	117U5025			117U0349	117U1021	
TFS4.5CLX	102U2103								117U4148	117U5025			117U0349	117U1021	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis-charge E	Oil cooler F	
207	1.13	389	1.44	654	1.72		1/5	3.86	103-135 V, 60 Hz	F2	173	169	6.5	6.5	5.0		4 5 10 11
273	1.20	496	1.40				1/4	4.63	103-135 V, 60 Hz	F2	173	169	6.5	6.5	5.0		4 5

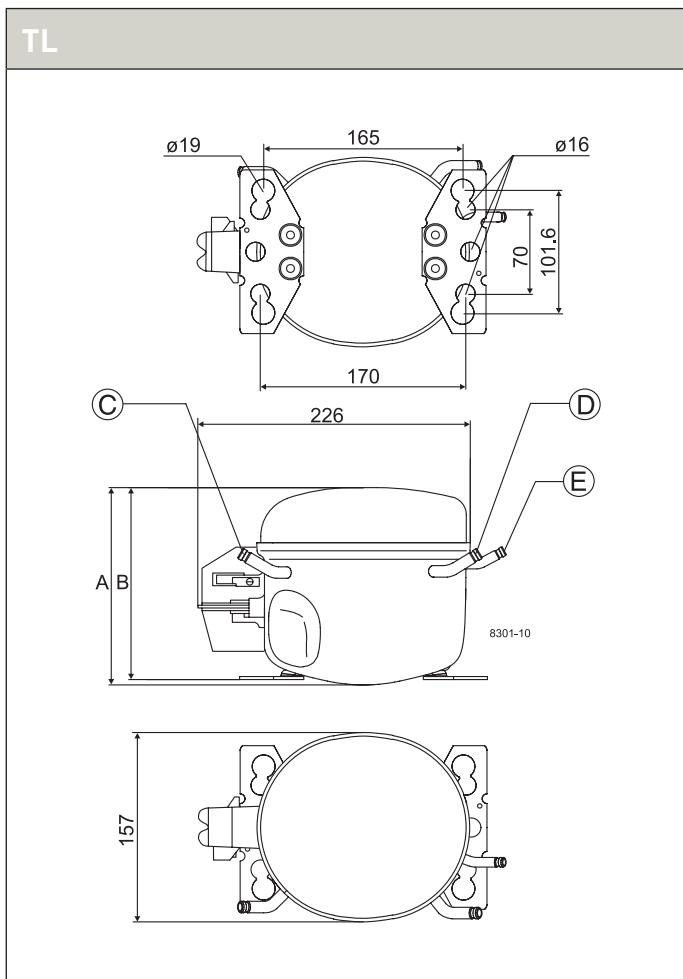

R404A/R507 • 115 V • 60 Hz • N-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]							EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]															
			LBP rating point -35°C / 40°C							MBP rating point -10°C / 45°C				HBP rating point 5°C / 50°C																	
			-35		-15		-5		0			15				Cooling capacity		COP		-35		-15		-5		0		10		15	
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		
NF5.5CLX	105F1621	L/MBP	190	495	728	869			189	0.84	524	1.30	799	1.43	192	539	814	984													
NF7CLX	105F1721	L/MBP	230	623	923	1105			230	0.83	662	1.33	1017	1.47	228	675	1029	1248													

R404A/R507 • 115 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST			
		PTC starting device		PTC starting device with RC connector		Protector (external)		optional or compulsory (refer to data sheet)		Starting relay		Starting capacitor		Starting device *		Starting kit *	
		Spades		Spades		Spades		Spades		Spades		Spades		Spades		Cord relief	Cover
		6.3 mm		4.8 mm		6.3 mm		4.8 mm		6.3 mm		6.3 mm		6.3 mm			
NF5.5CLX	105F1621									117U4061	117U5025				117U0349	117U1021	
NF7CLX	105F1721									117U4129	117U5022				117U0349	117U1021	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
367	1.23	667	1.58	1113	2.02		1/3	6.13	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	4 10 11
453	1.23	841	1.61	1417	2.08		1/2	7.27	95-135 V, 60 Hz	F2	197	191	8.2	6.5	6.5		X	4 10 11

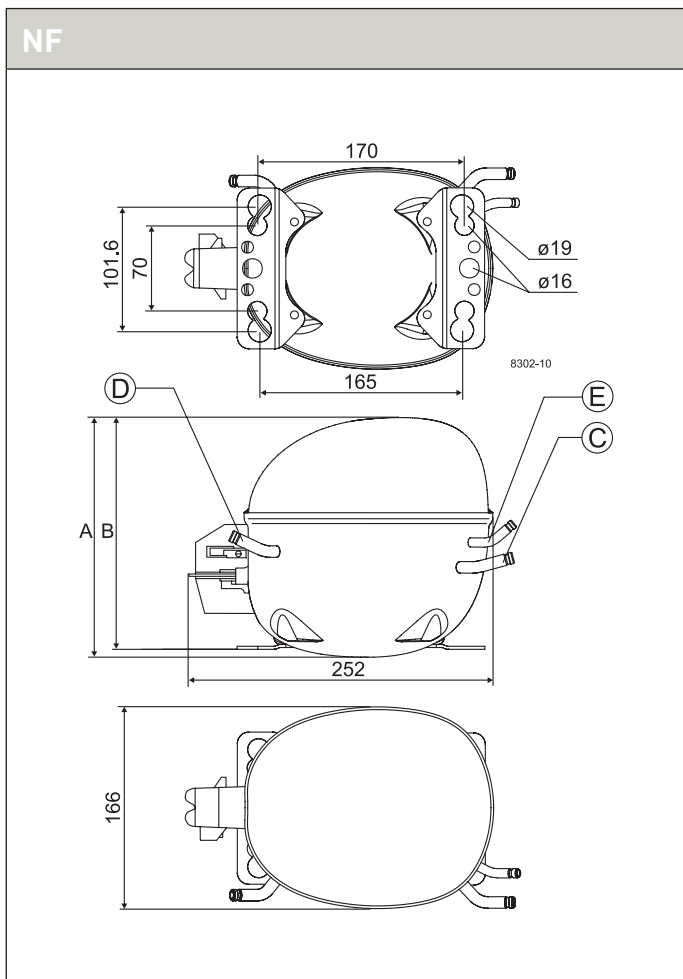

R404A/R507 • 115 V • 60 Hz • S-Series



Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]							
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C			
			-35	-15	-5	0	10	15	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	-35	-15	-5	0	10	15
SC10CL	104L1503	L/MBP	172	729	1148	1401			198	0.66	802	1.29	1262	1.50	130	701	1157	1442				
SC12CL	104L1603	LBP	282	972					303	0.66	1041	1.13			226	1098						
SC12CLX.2	104L1696	LBP	334	997					345	0.74	1062	1.19			304	1106						
SC15CLX.2	104L1853	LBP	437	1239					444	0.83	1323	1.35			414	1339						
SC18CLX.2	104L2198	LBP	523	1360					528	0.86	1430	1.34			503	1502						
SC12MLX	104L1606	MBP		978	1484	1799					1051	1.30	1661	1.52		1042	1631	2003				
SC15MLX	104L1805	MBP		1129	1714	2078					1213	1.22	1918	1.42		1203	1883	2313				
SC18MLX	104L2105	MBP		1412	2106	2538					1502	1.26	2337	1.47		1523	2331	2843				
SC15MLX.2	104L1807	MBP		1147	1715	2069					1222	1.30	1905	1.49		1236	1897	2315				

R404A/R507 • 115 V • 60 Hz • S-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
SC10CL	104L1503								117U6020	117U5023			103N1004	103N2008	
SC12CL	104L1603								117U6020	117U5023			103N1004	103N2008	
SC12CLX.2	104L1696								117U6020	117U5023			103N1004	103N2008	
SC15CLX.2	104L1853							117-7114	117-7441	117U5043	117-7045		117U1021		
SC18CLX.2	104L2198							117-7114	117-7441	117U5043	117-7045		117U1021		
SC12MLX	104L1606								117-7441	117U5042	117-7053		117U1021		
SC15MLX	104L1805							117-7114	117-7441	117U5043	117-7045		117U1021		
SC18MLX	104L2105							117-7114	117-7441	117U5043	117-7045		117U1021		
SC15MLX.2	104L1807							117-7114	117-7441	117U5043	117-7045		117U1021		

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					Oil cooler alt. connectors available
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						A	B	Suction C	Process D	Dis- charge E	F		
418	0.99	936	1.47	1690	2.05		1/2	10.29	103-127 V, 60 Hz	F2	209	203	8.2	6.5	6.5		X	4 10 11
699	1.11						3/4	12.87	103-127 V, 60 Hz	F2	209	203	8.2	6.5	6.5		X	4
726	1.14	1381	1.48				3/4	12.87	103-127 V, 60 Hz	F2	209	203	8.2	6.5	6.5		X	4
883	1.21	1683	1.62			*	3/4	15.28	103-127 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	4
1076	1.32	1783	1.61				1	17.69	103-127 V, 60 Hz	F2	219	213	9.7	6.5	6.5		X	4
686	1.18	1328	1.56	2315	2.12		3/4	12.87	95-135 V, 60 Hz	F2	219	213	8.2	6.5	6.5			10 11
792	1.10	1533	1.45	2673	1.98	*	3/4	15.28	95-135 V, 60 Hz	F2	219	213	9.7	6.5	6.5			10 11
1034	1.18	1904	1.52	3259	2.07	23.5	1	17.69	103-127 V, 60 Hz	F2	219	213	9.7	6.5	6.5			10 11
836	1.23	1548	1.55	2656	2.09	23.5	3/4	15.28	103-127 V, 60 Hz	F2	219	213	9.7	6.5	6.5			10 11

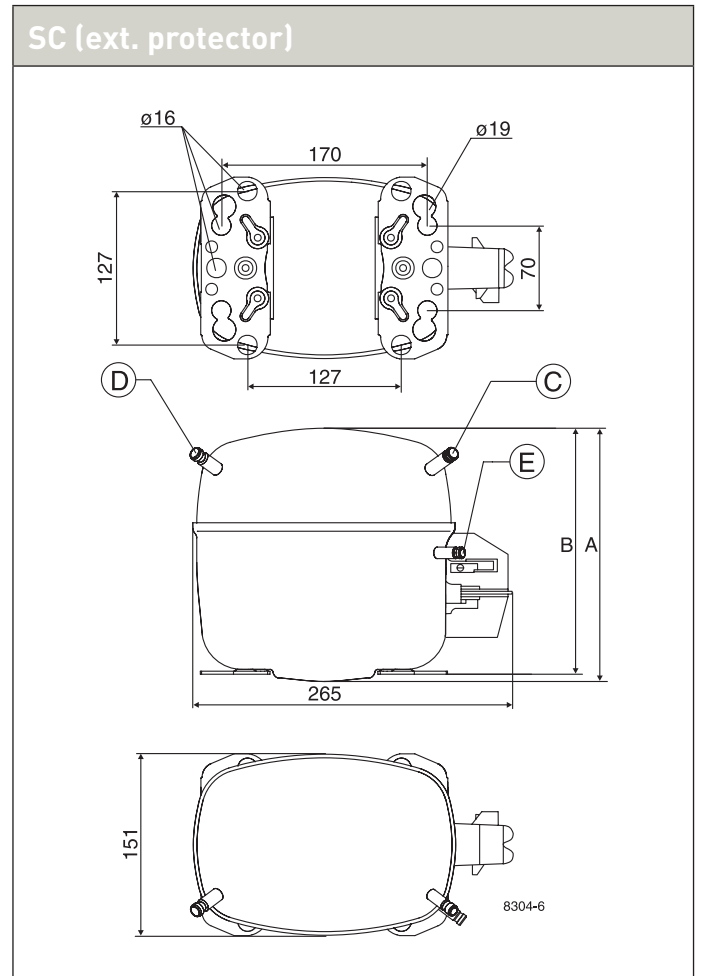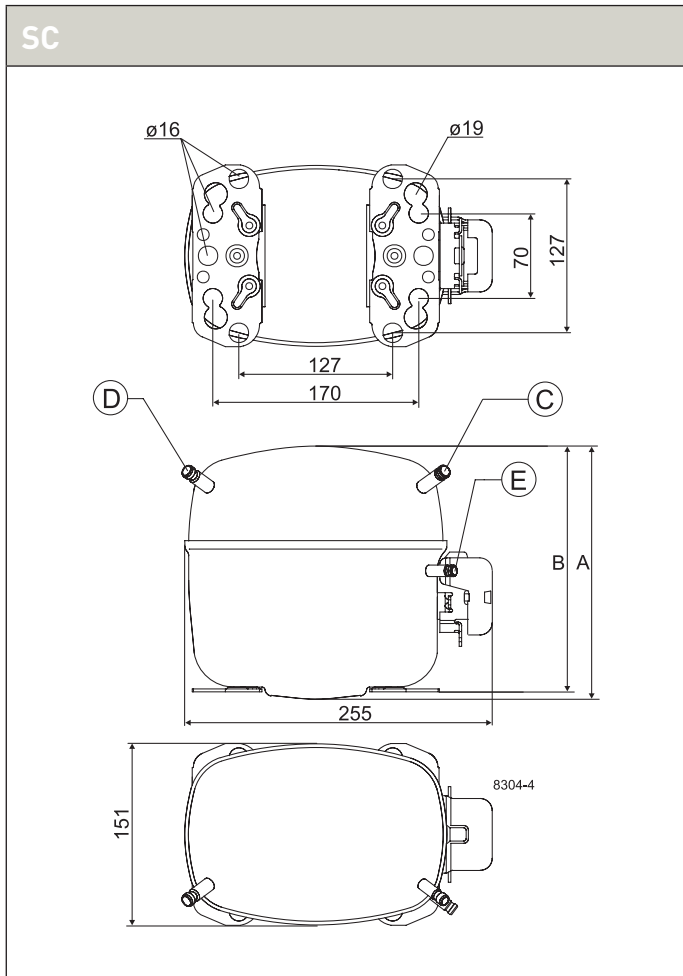

With more than 50 years of experience in compressor technology and highly committed employees, our focus is to develop and apply the advanced

compressor technologies to achieve standard setting performance for leading products and businesses around the world.

R290

115 V | 60 Hz



T-Series	170-171
D-Series	172-173
N-Series	174-175
S-Series	176-177

Chemical formula

C_3H_8

Typelabel

Typelabel stripe colour: Red
Typelabel colour: Green

Applications

LBP: Low Back Pressure
HBP: High Back Pressure
MBP: Medium Back Pressure

Motor types

RSIR: Resistant Start Induction Run
RSICR: Resistant Start Capacitor Run
CSIR: Capacitor Start Induction Run
CSR: Capacitor Start Run

Compressor cooling

S = Static cooling normally sufficient
O = Oil cooling
F₁ = Fan cooling 1.5 m/s (compressor compartment temp. equal to ambient temperature)
F₂ = Fan cooling 3.0 m/s necessary

Starting devices

LST: Low Starting Torque
LST is used with capillary tube control and pressure equalizing. (Pressure equalizing may exceed 10 minutes). The PTC starting device requires 5 minutes cooling before each start.
To fulfil the requirements of EN 60355-2-34 the protection screen 103N0476 must be applied to the PTC starting device.
HST: High Starting Torque
HST consisting of relay and starting capacitor is used for expansion valve control or for capillary tube control without pressure equalizing.
ePTC: Electronically controlled PTC
• Compressor restart possible after a few seconds
• Operational wattage loss reduced by 2 watt
• PTC protection screen not needed (surface temp. < 82 °C)
• Temperature resistant up to min. +60 °C
• Additional information, code numbers: refer to page 18

Test conditions

Electrical equipment being used is listed in our data sheets

1 Watt = 0.86 kcal/h
1 Watt = 3.41 Btu/h





R290 • 115 V • 60 Hz • T-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]	
TL4.0CNX.2	102H3490	L/MBP	112	292	438	530			111	0.81	319	1.57	517	2.07	107	310	467	566		
TL4.8CNX.2	102H3590	L/MBP	141	356	521	621			141	0.90	384	1.57	601	1.96	137	380	560	668		

R290 • 115 V • 60 Hz • T-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
TL4.0CNX.2	102H3490									117U7005	117U5023			103N1010	103N2011
TL4.8CNX.2	102H3590									117U7005	117U5023			103N1010	103N2011

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application	
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]					alt. connectors available
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F		
212	1.27	399	1.85	671	2.69		1/5	4.01	95-135 V, 60 Hz	F2	173	169	6.5	6.5	5.0		3 4 5 7 10 11	
263	1.34	479	1.86	772	2.52		1/4	4.78	95-135 V, 60 Hz	F2	173	169	6.5	6.5	5.0		3 4 5 7 10 11	

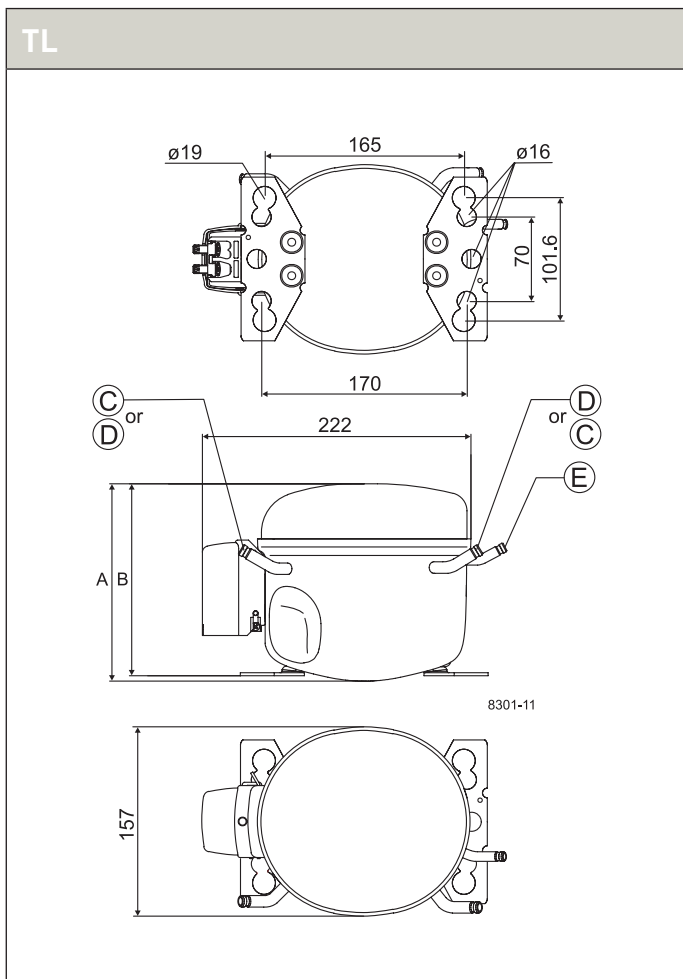

R290 • 115 V • 60 Hz • D-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]																
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15				
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15	-35	-15	-5	0	10
DLE4CN	102H3482	L/MBP	126	315	464	555			123	1.03	341	1.81	536	2.32	128	331	494	595													
DLE4.8CN	102H3582	L/MBP	160	384	563	672			157	1.01	414	1.75	646	2.25	154	408	600	717													

R290 • 115 V • 60 Hz • D-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		ePTC	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
DLE4CN	102H3482						103N0058	117-7118		117U7022	117U5023			103N1010	103N0492
DLE4.8CN	102H3582						103N0058	117-7118		117U7011	117U5023			103N1010	103N0492

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						Suction C	Process D	Dis-charge E	Oil cooler F	alt. connectors available		
230	1.50	422	2.10	699	3.01	*	1/5	4.01	95-135 V, 60 Hz	175	169	8.2	6.5	6.5		3 4 6 10 11	
286	1.47	514	2.06	835	2.97	*	1/4	4.78	95-135 V, 60 Hz	175	169	8.2	6.5	6.5		3 4 6 10 11	

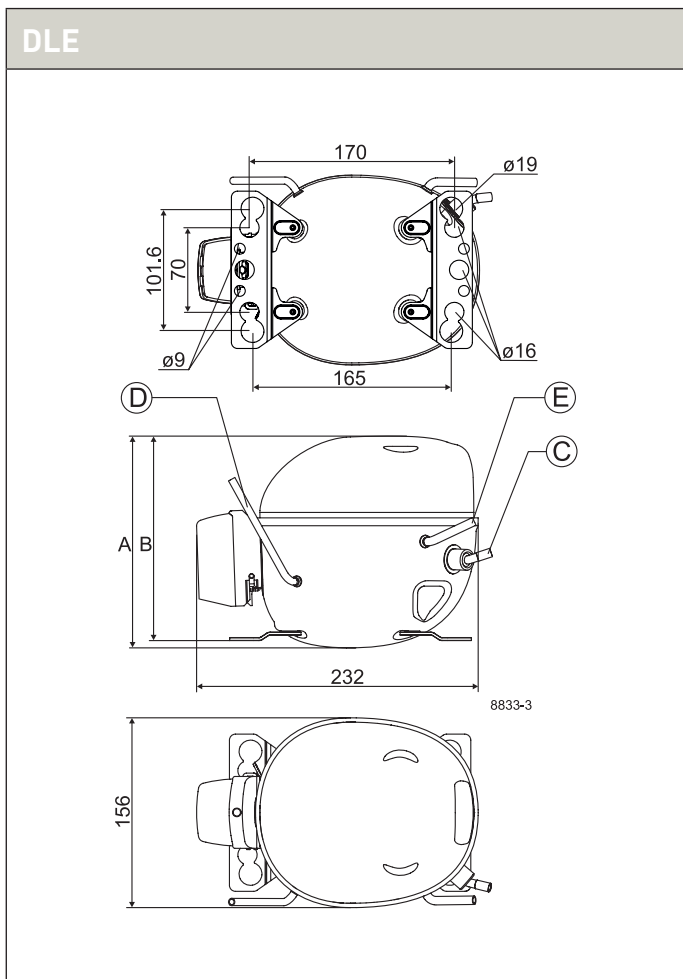

R290 • 115 V • 60 Hz • N-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			LBP rating point -35°C / 40°C						MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C				T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]					
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15
			[W]	[W]	[W]	[W]	[W]	[W]	[W/W]	[W/W]	[W]	[W/W]	[W]	[W/W]	[W]	[W]	[W]	[W]	[W]	[W]
NL7.3CNX.2	105H6790	L/MBP	226	577	856	1024			214	0.90	627	1.71	990	2.16	244	612	917	1103		
NL8.4CNX.2	105H6090	L/MBP	263	664	976	1167			254	1.00	717	1.71	1127	2.10	267	699	1038	1249		

R290 • 115 V • 60 Hz • N-Series • Electrical Equipment

Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST	
		PTC starting device		PTC starting device with RC connector		Protector (external)	optional or compulsory (refer to data sheet)		Starting relay	Starting capacitor	Starting device *	Starting kit *	Cord relief	Cover	
		Spades		Spades		Spades	Spades		Spades		Spades				
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm			
NL7.3CNX.2	105H6790								117U7013	117U5035			103N1010	103N2011	
NL8.4CNX.2	105H6090								117U7013	117U5035			103N1010	103N2011	

Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional]	Power	Displacement	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP	Cooling capacity [W]	COP	Cooling capacity [W]	COP						Suction C	Process D	Dis-charge E	Oil cooler F	alt. connectors available		
422	1.44	783	2.02	1288	2.81		1/2	7.27	95-135 V, 60 Hz	F2	203	197	8.2	6.5	6.5		3 4 5 7 10 11
487	1.47	887	1.98	1467	2.72		1/2	8.35	95-135 V, 60 Hz	F2	203	197	8.2	6.5	6.5		3 4 5 7 10 11

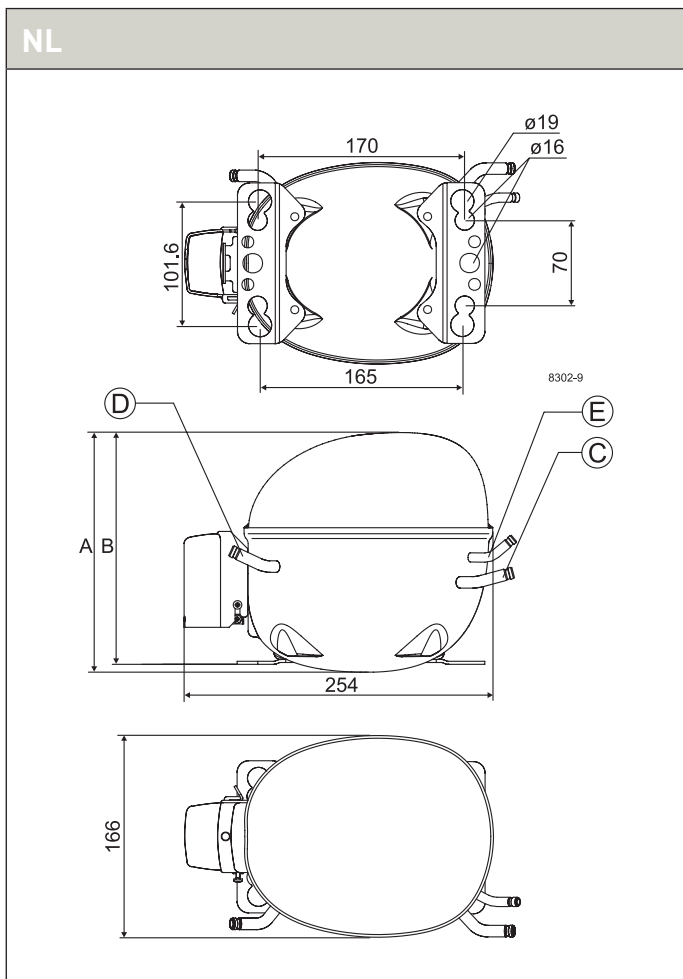

R290 • 115 V • 60 Hz • S-Series


Compressor	Code number	Application	EN 12900 Capacity [W] T _c =45°C, T _{liq} =45°C, T _{suc} =32°C Evaporating temperature [°C]						EN 12900						ASHRAE Capacity [W] T _c =54.4°C, T _{liq} =32.2°C, T _{suc} =32.2°C Evaporating temperature [°C]																	
			LBP rating point -35°C / 40°C		MBP rating point -10°C / 45°C		HBP rating point 5°C / 50°C		Cooling capacity		COP		Cooling capacity		COP		-35		-15		-5		0		10		15					
			[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]		[W]		[W/W]			
			-35	-15	-5	0	10	15	Cooling capacity	COP	Cooling capacity	COP	Cooling capacity	COP	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15	-35	-15	-5	0	10	15
SC10CNX.2	104H7070	L/MBP	209	712	1093	1323			224	0.76	789	1.61	1298	2.26	156	728	1163	1428														
SC12CNX.2	104H7270	L/MBP	308	881	1315	1577			311	0.86	961	1.65	1542	2.11	282	930	1423	1723														

R290 • 115 V • 60 Hz • S-Series • Electrical Equipment


Compressor	Code number	LST (RSIR & RSCR) - refer to data sheet for more info						Run capacitor (RC)		HST (CSIR & CSR) - * alt. cable lengths avail.				LST/HST			
		PTC starting device		PTC starting device with RC connector		Protector (external)		optional or compulsory (refer to data sheet)		Starting relay		Starting capacitor		Starting device *		Starting kit *	
		Spades		Spades		Spades		Spades		Spades		Spades		Spades		Cord relief	Cover
		6.3 mm	4.8 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	4.8 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm	6.3 mm				
SC10CNX.2	104H7070									117U7020	117U5023					103N1004	103N2008
SC12CNX.2	104H7270									117U7020	117U5023					103N1004	103N2008


Refrigerators = 1 | Freezers = 2 | Beverage coolers = 3 | Commercial freezers = 4 | Minibars = 5 | Ice cream cabinets = 6
 Water coolers = 7 | Heat pumps = 8 | Wine coolers = 9 | Display cabinets = 10 | Ice makers = 11

ASHRAE						Run capacitor [* optional] [μF]	Power [HP]	Displacement [cm ³]	Voltage and frequencies [* dual frequency type with 50/60 Hz]	Compressor cooling [refer to data sheet]	Dimensions						Application
LBP rating point -23.3°C / 54.4°C		MBP rating point -6.7°C / 54.4°C		HBP rating point 7.2°C / 54.4°C							Height [mm]		Connectors location/I.D. [mm]				
Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]	Cooling capacity [W]	COP [W/W]						A	B	Suction C	Process D	Dis- charge E	Oil cooler F	
449	1.17	985	1.93				1/2	10.29	95-135 V, 60 Hz	F2	209	203	9.7	6.5	6.5		3 4 7 10 11
614	1.29	1212	1.93				3/4	12.87	95-135 V, 60 Hz	F2	209	203	9.7	6.5	6.5		3 4 7 10 11

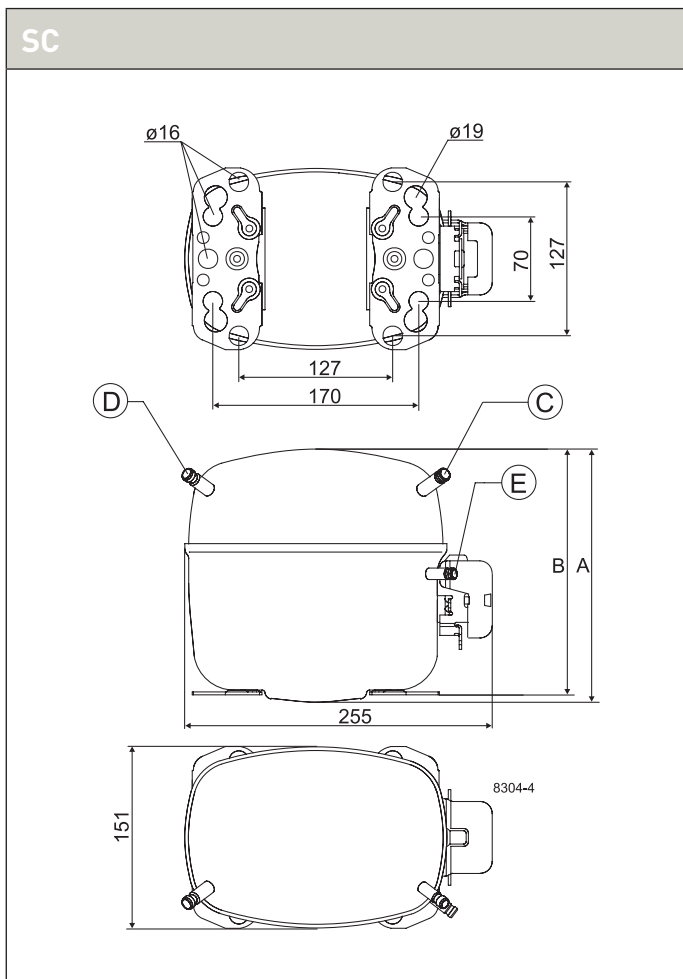

NOTES

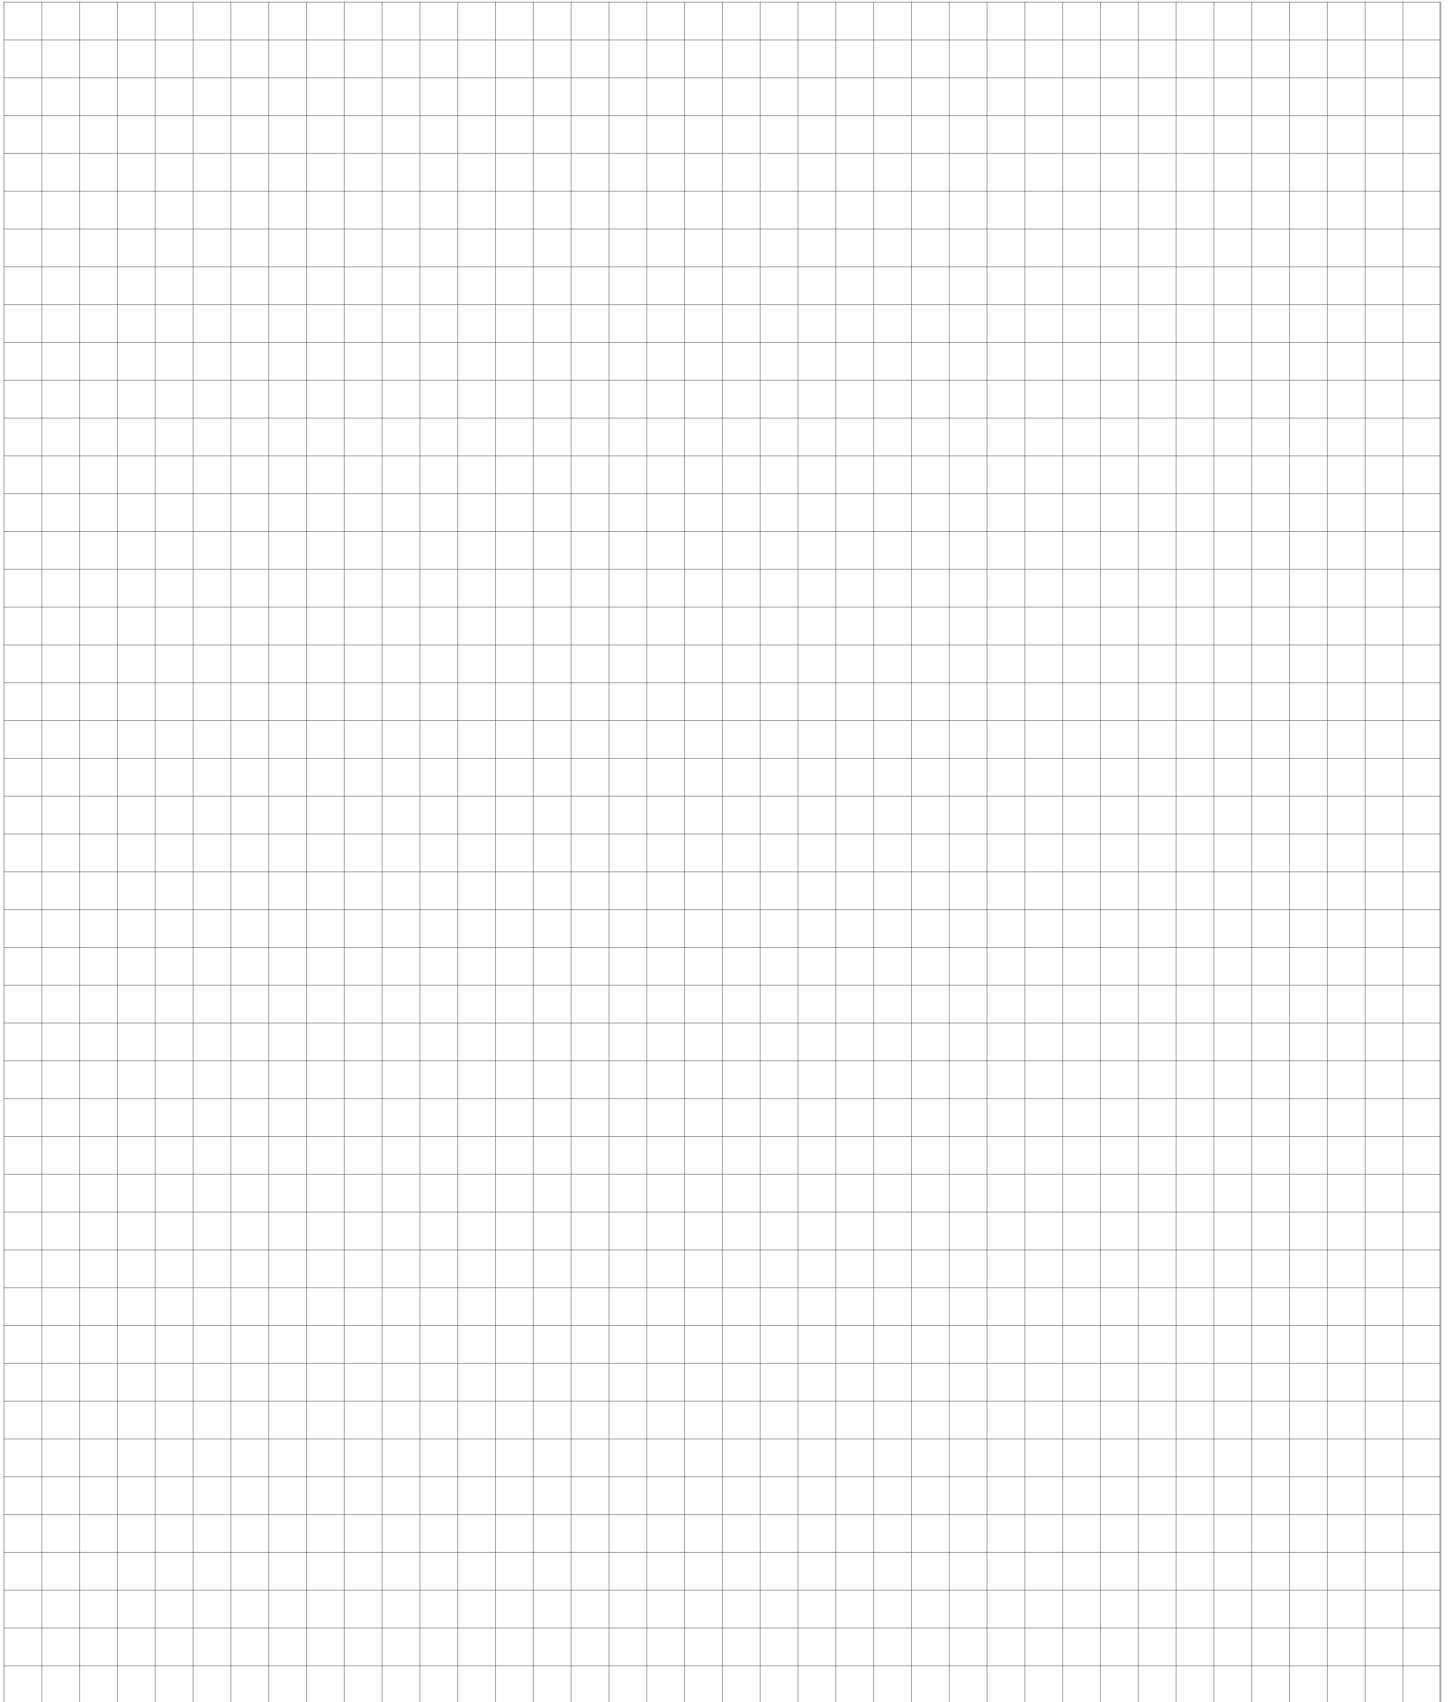

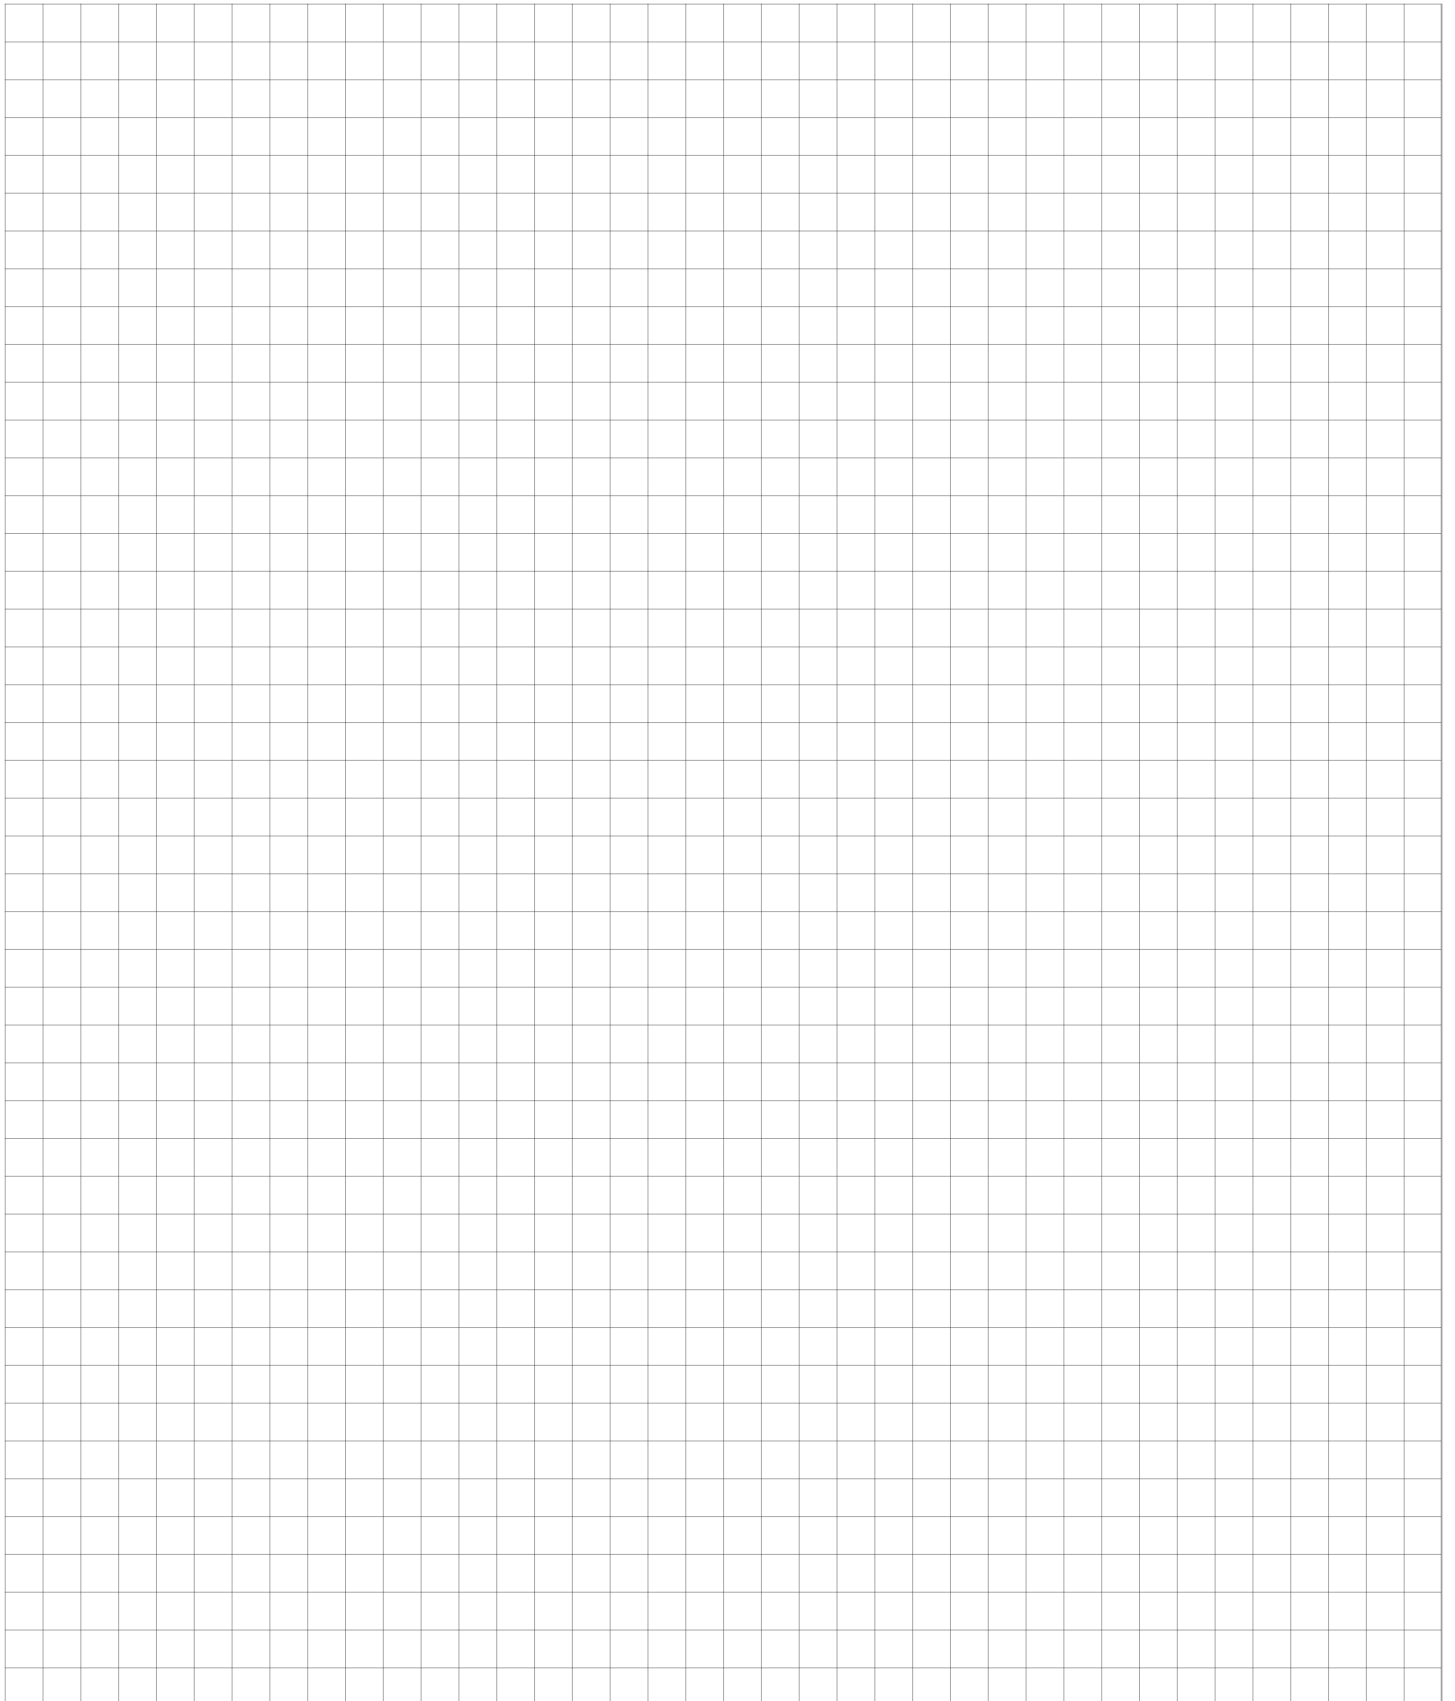

OUR IDENTITY

At Secop we are committed to our industry and are genuinely passionate about the difference we are able to make for our customers. We understand their business and objectives and the challenges of today's world of refrigeration and cooling systems.

We work in a straightforward way, being open, direct and honest because we want to make things clear and easy.

Our people are committed to increasing value for our customers and constantly strive for better performance, knowing that our own progression and success is dependent on theirs.



OUR JOURNEY
SO FAR

<p>1956 Production facility and headquarters in Flensburg, Germany founded</p>	<p>1970 Introduction of SC compressors. The birth of a standard setting platform in the light commercial market.</p>	<p>1990 Introduction NL compressors.</p>	<p>1992 Introduction PL compressors.</p>	<p>1999 Start of production with natural refrigerant R290 (Propane).</p>	<p>2005 Introduction GS compressors.</p>	<p>2008 Production facility in Wuqing, China founded.</p>	<p>2013 Introduction of the XV compressor. Opening a new chapter in refrigeration history. Secop acquires ACC Fürstenfeld, Austria.</p>
<p>1958 Start up production of PW compressors.</p>	<p>1972 Introduction FR compressors.</p>	<p>1977 Introduction TL and BD compressors.</p>	<p>1993 Start of production with natural refrigerant R600a (Isobutane) Production facility in Crnomelj, Slovenia founded.</p>	<p>2002 Production facility in Zlate Moravce, Slovakia founded.</p>	<p>2010 Introduction SLV-CNK.2 and SLV-CLK.2 variable speed compressors. Introduction BD1.4F Micro DC compressor. Introduction of DLX and NLU compressors.</p>		

