


Compressor, FL15S68NAA, 1/5 hp, LBP,  
R134a, 6.8 cm<sup>3</sup>, 185 w, 159 kcal/h,  
632 btu

Category: compressor

written by Amina | 7 November 2023

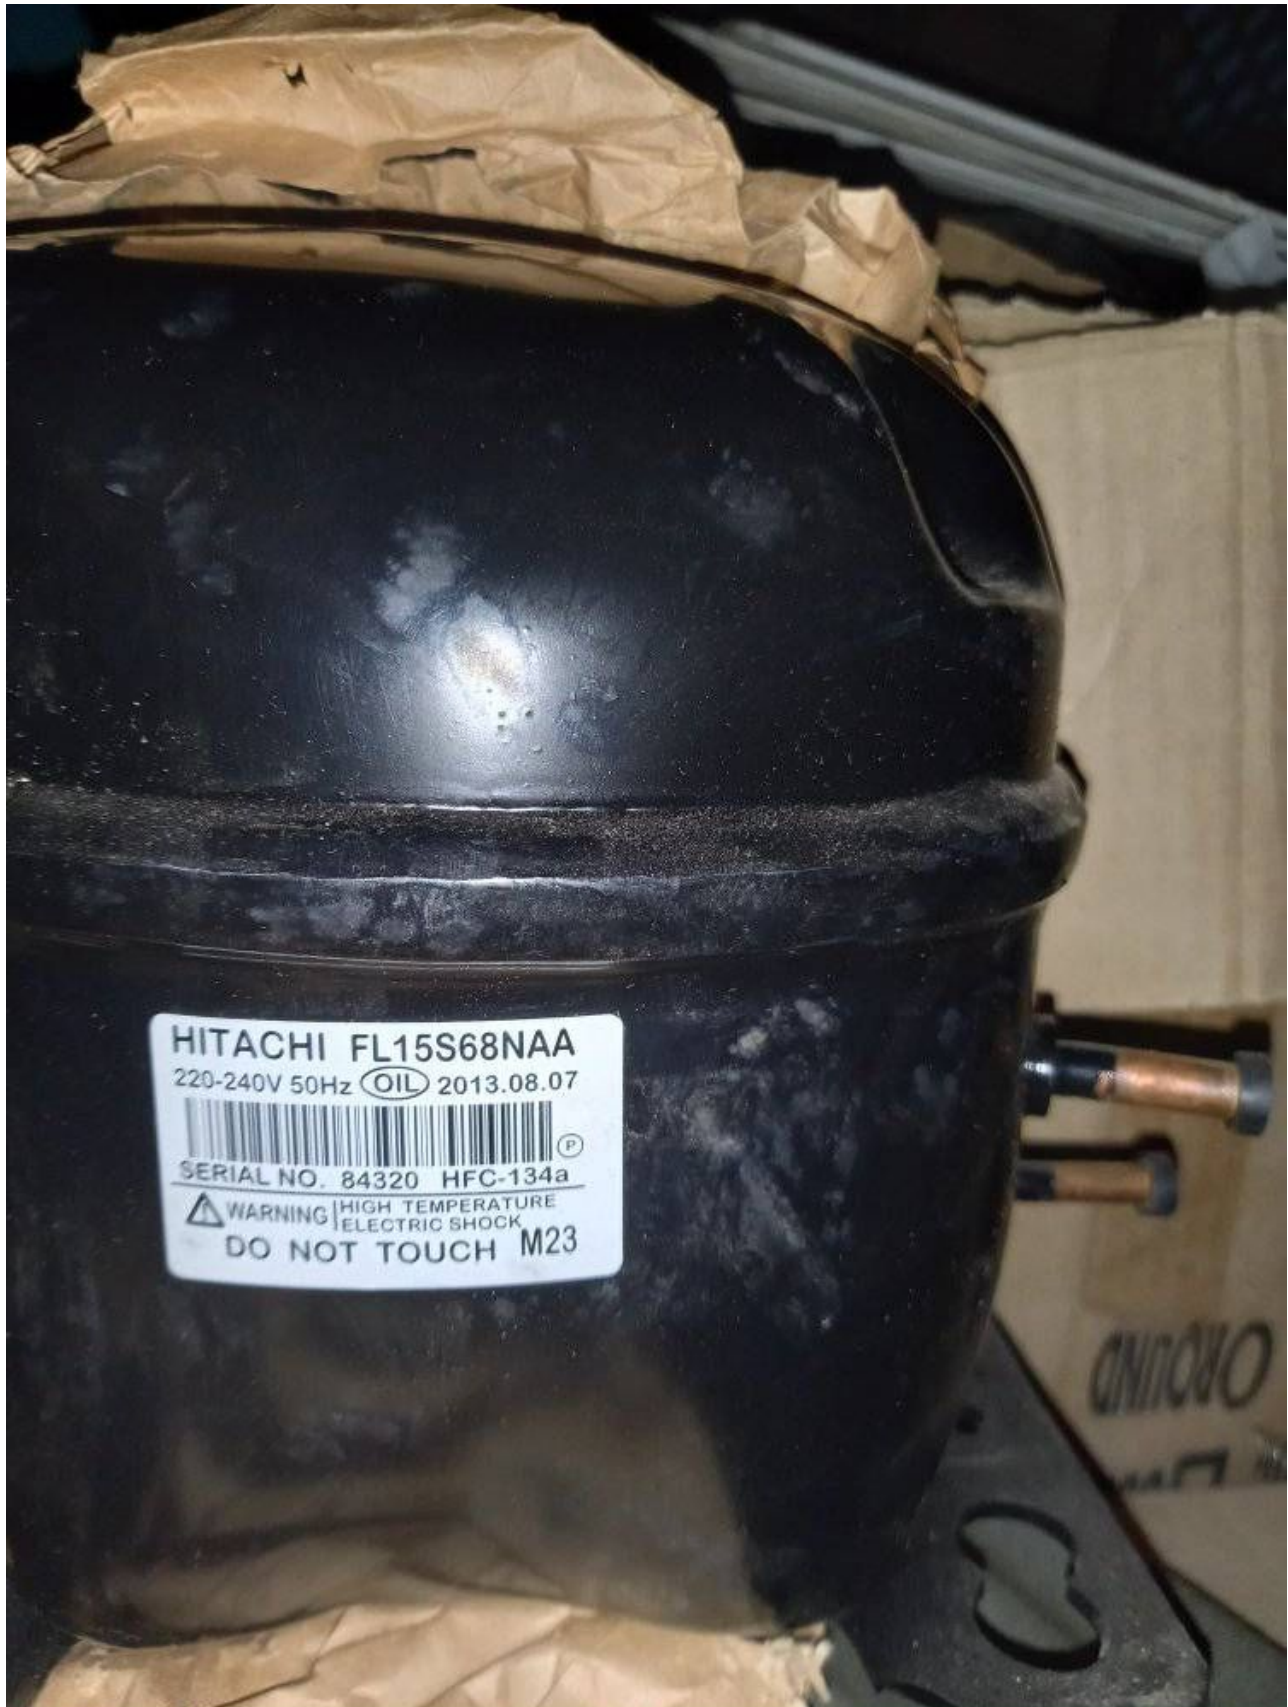

HITACHI FL15S68NAA  
220-240V 50Hz OIL 2013.08.07  
SERIAL NO. 84320 HFC-134a  
WARNING HIGH TEMPERATURE  
ELECTRIC SHOCK  
DO NOT TOUCH M23

	(Volt)	(Hz)	(Cm <sup>2</sup> )	W	Kcal / h	Btu / h	W / W		uF / V	(kg)	(mm)
FL08S47NAA	220-240	50	4.7	130	112	444	1.50	RSCR	4/400	6.9	178
FL11S52NAJ	220-240	50	5.2	143	123	488	1.50	RSCR	4/400	7.7	178
FL12S57NAQ	220-240	50	5.7	160	138	546	1.50	RSCR	4/400	8.0	186
FL12S57NAP	220-240	50	5.7	160	138	546	1.60	RSCR	4/400	9.5	196
FL14S62NAE	220-240	50	6.2	165	142	563	1.50	RSCR	4/400	10.8	211
FL14S62NAF	220-240	50	6.2	165	142	563	1.60	RSCR	4/400	11.0	211
FL15S68NAQ	220-240	50	6.8	185	159	632	1.50	RSCR	4/400	11.0	211
FL15S68NAP	220-240	50	6.8	185	159	632	1.60	RSCR	4/400	11.0	211
FL15S68NAR	220-240	50	6.8	185	159	632	1.70	RSCR	4/400	11.0	211
FL15S68NAS	220-240	50	6.8	185	159	632	1.80	RSCR	4/400	11.2	216
FL18S75NAL	220-240	50	7.5	200	172	683	1.50	RSCR	4/400	11.0	211
FL18S75NAH	220-240	50	7.5	200	172	683	1.60	RSCR	4/400	11.0	211
FL18S75NAJ	220-240	50	7.5	200	172	683	1.70	RSCR	4/400	11.0	211
FL18S75NAM	220-240	50	7.5	200	172	683	1.80	RSCR	4/400	11.2	216
FL20S88NAV	220-240	50	8.8	260	224	888	1.50	RSCR	4/400	10.8	211
FL20S88NAW	220-240	50	8.8	260	224	888	1.60	RSCR	4/400	11.0	216
FL20S88NAX	220-240	50	8.8	260	224	888	1.70	RSCR	4/400	11.2	216
FL20S88NAY	220-240	50	8.8	260	224	888	1.80	RSCR	4/400	11.2	216

**Note:** All data covered by this catalog are given as general information only.

Since we are constantly improving our product, the specification and availability are subject to change with out notice.

Test Conditions (ASHRAE Condition)	Evaporating Temperature	Condensing Temperature	Liquid Temperature	Return gas Temperature	Ambient Temperature
Low back pressure (LBP)	-23.3 °C (-10 °F)	54.4 °C (130 °F)	32.2 °C (90 °F)	32.2 °C (90 °F)	32.2 °C (90 °F)

