

SCHNEIDER N:ATV32H075M2 variable speed drive ATV32 – 0,75 kw – 200 V – 1 phase – with heat sink

written by Lilianne | 29 December 2021







PINCE EMBOITURE VIRAX 12-32MM SERTISSAGE AXIAL PER-PEX 12-16MM

written by Lilianne | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO









- 252641 Ø 12-14-16-18-22 MM
- 252644 Ø 12-14-16-18-22-28-32 MM
- 252679 Ø 12-15-18-22-28 MM
- 252637 Ø 9-10-14-16-18
- 252651 Ø 9-10-14-16-18-1.5"
- 252681 Ø 9-10-14-16-18-1.5"



Private Picture Copyright : WWW.MBSM.PRO

Machine a laver lg 11kg

written by Lilianne | 29 December 2021



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



BONNAMY AUTOMATIC TUBE BENDER

written by Lilianne | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO





White whale look machine a laver

written by Lilianne | 29 December 2021




Private Picture Copyright: WWW.MBSM.PRO



Tambour samsung 5kg

written by Lilianne | 29 December 2021

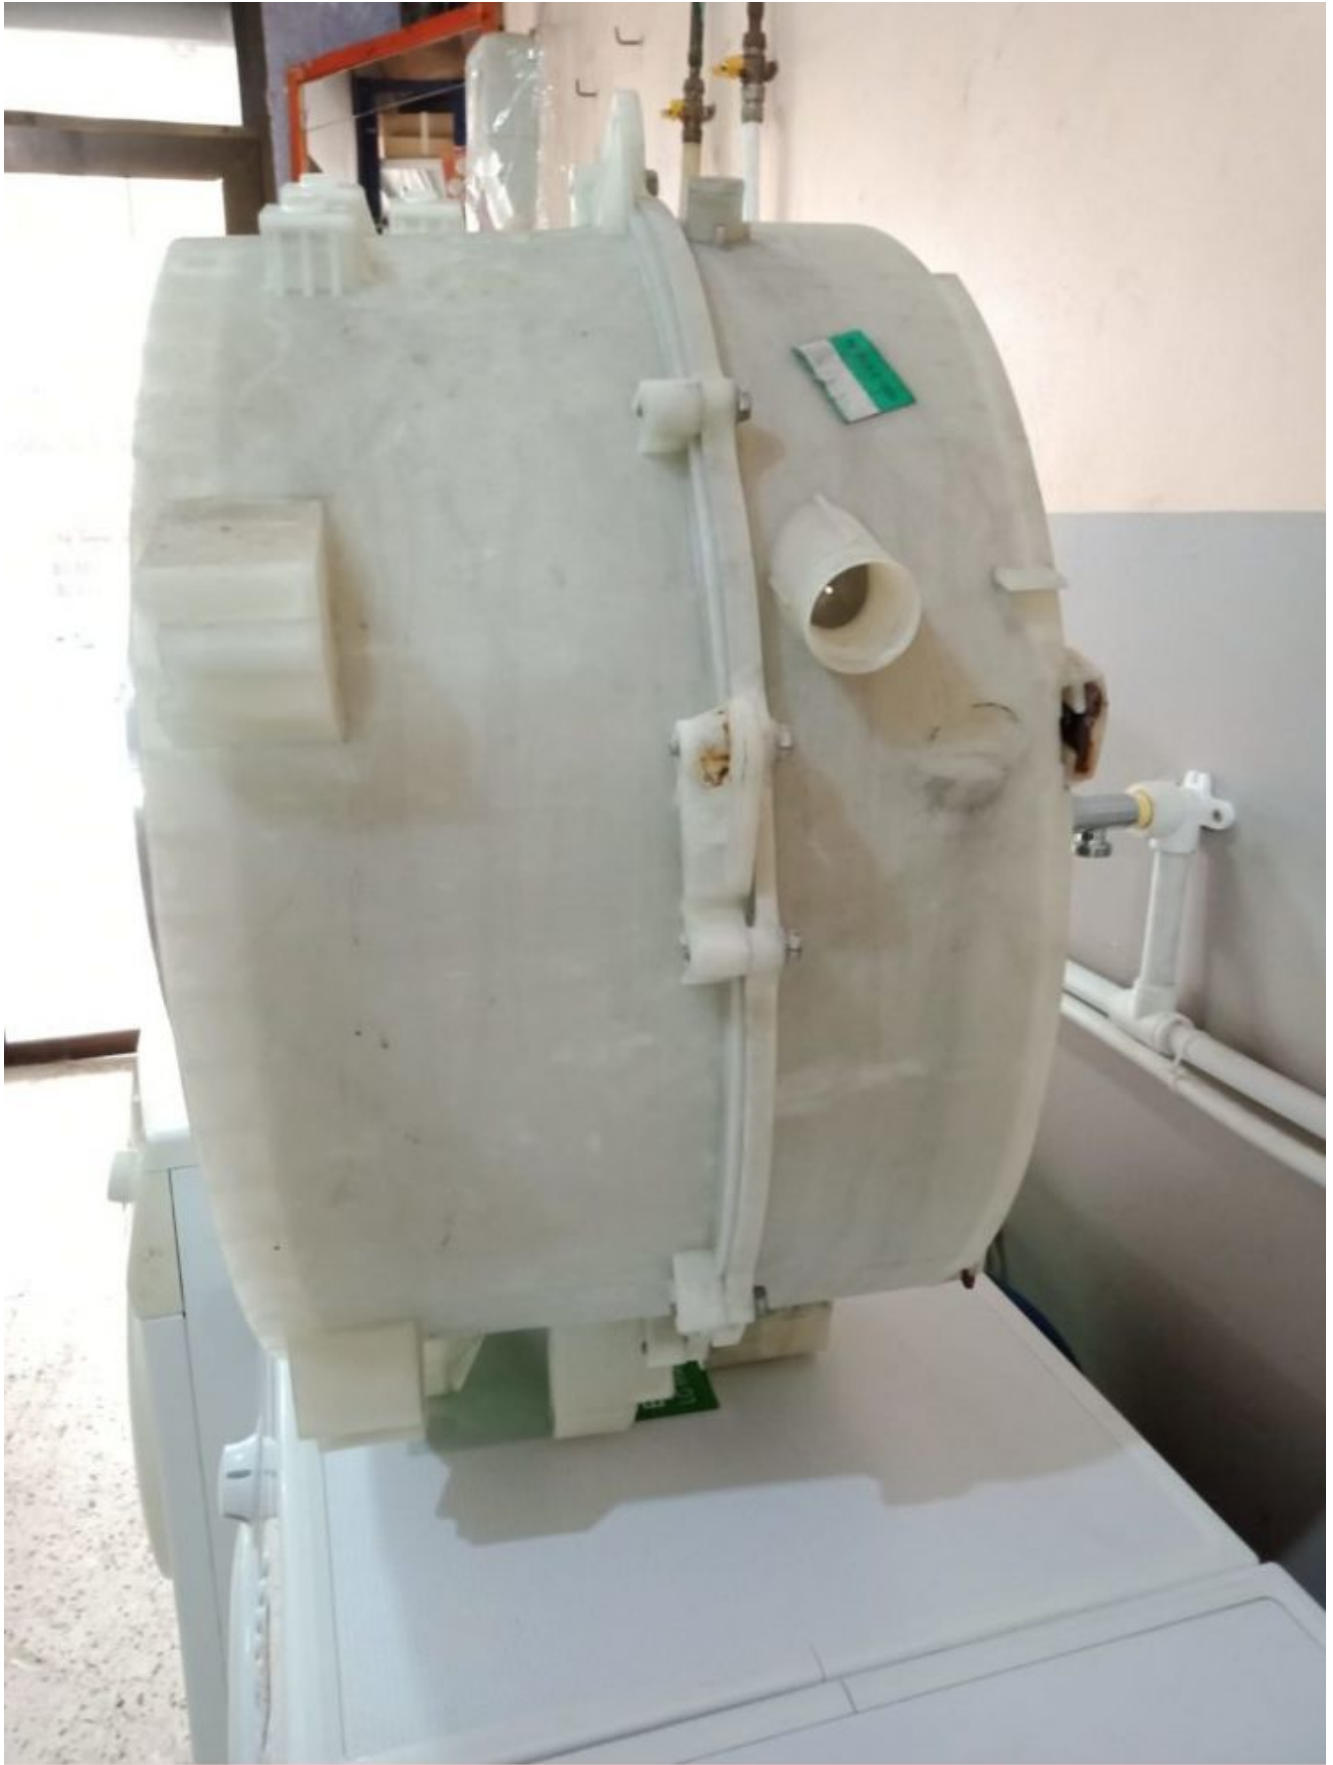



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Chaudiere saunier duval 24kw

written by Lilianne | 29 December 2021

Mbsm_dot_pro_private_picture_chaudiere-saunier-duval-24kwTélécharger



LG, compressor, 1/10, 1/8, 1/6, 1/5, 1/4, 1/3, hp power, wattage, capillary, amperes

written by Lilianne | 29 December 2021

Refrigerator compressor LG India full data HP codes, amperes, capillary tube, wattage trace Hp power and connect size wise capillary tube

Capillary	Ampair	Wattage	Codes	Hp Power
0.028	0.75	63	NS36LAEG	1\10
0.033	0.81	77	MSA43LBEG	1\8
0.033	1.12	116	MA53LAEG	1\6
0.033	1.12	142	MA57LBEG	1\6+
0.036	1.35	160	MA62LCEG	1\5
0.040	1.35	174	MA69LCEG	1\5+
0.040	1.4	200	MA72LCEG	1\4
0.042	1.6	210	MA88LCEG	1\3
0.042	1.6	279	MA98LAEM	1\3+

High, Efficiency, R134a, Hermetic, Compressor, GPY16AF, RoHS, 3/8hp, csir, 1bp, 220v, 380w

written by Lilianne | 29 December 2021

R134a GPY16AF series sealed refrigeration compressor 220-240v/50Hz

The main feature:
strong loading capacity,
high efficiency,
low noise,
light vibration,
good reliability.

suitable for mid-size refrigerators, freezers, displayers, beer displayers and other mid-size refrigeration appliances.

The structure form is hermetical crank connecting-rod reciprocating piston type.

They are the best selling high-tech compressors sold in the world. They are ideal for domestic refrigeration and also for small commercial applications. They are small, have low noise and vibration levels, they achieve the highest levels of efficiency available in the market for this category.

KONOR	Displ.	power	Motor type	V/Hz	Cooling capacity W	Net Weight	KG
GQR60AA	6	1/6	RSIR	220-240V/50Hz	140		9.4
GQR70AA	6.6	1/5	RSIR	220-240V/50Hz	165		9.4
GQR80AA	8.1	1/4	RSIR	220-240V/50Hz	198		9.4
GQR90AA	9.1	1/4	RSIR	220-240V/50Hz	220		10.1
GQY99AA	9.9	1/4	RSIR	220-240V/50Hz	270		10.9
GQY12AF	11.8	1/3	CSIR	220-240V/50Hz	325		10.56
GQY16AF	16.2	3/8	CSIR	220-240V/50Hz	380		12.1
GP16MG	16.2	5/8	CSIR	220-240V/50Hz	870		12.5
GP12MG	11.8	5/8	CSIR	220-240V/50Hz	656		10.9
GP12TG	11.8	3/8	CSIR	220-240V/50Hz	1140		11.8

GQR80TG	8.1	1/4	CSIR	220-240V/50Hz	730	9.8
GQR90TG	9.1	1/4	CSIR	220-240V/50Hz	830	10.5
GQR60TG	6	1/5	CSIR	220-240V/50Hz	520	9.8

Specification

Hermetic motor driven the piston connecting rod type compressor. With relay start-up of hammer type, and equipped with overload protector.

Application

Widely used in homeand commercial refrigerator,air-curtain cabinet, display showcase, ice maker, chiller freezer, dehumidifier, etc.

R134a LBP Fan Cooling Compressor

Model:GPY16AF

Power:3/8HP

Displacement:16.2cm³

Capacity:380w

COP:1.3W

Voltage:200-240V/50HZ

Motor Way:CSIR

Application:LBP

Cooling Type:Fan Cooling

Height:210mm

Net Weight:12.9kg

Dimension:210*162*237.2(mm)

Test Conditions(ASHRAE)

Evaporating temperature -23.3°C

Condensing temperature 54.4°C

Subcooling temperature 32.2°C

Suction temperature 32.2°C

Ambient temperature 32.2°C

Conversion:

1watt=3.41Btu/h=0.86kcal/h



REDMI NOTE 9
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

L111CYA, COMPRESSOR, ASSY, Indesit , Ariston, whirlpool, 1/5hp, 1bp, 180W, r600a

written by Lilianne | 29 December 2021



REDMI NOTE 8 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

WARNING


Electrical Shock Hazard



Disconnect power before servicing.
 Any ground circuit disconnected during service must be reconnected.
 Do not reconnect unit to electrical supply until compressor terminal cover is securely in place.
 If refrigerant leak is suspected around compressor terminal, relieve all pressure from the system, keeping terminal cover in place.
 Failure to do so can result in death or electrical shock.

FREQUENCY	50 Hz
VOLTAGE RANGE	220-240 VAC
INPUT WATTS	175 W
INPUT CURRENT	1.3 A
COMFORT WATTS	600 W
COOLING CAPACITY	AS PER TABLE
CLIMATE CLASS	T

Do Not service with R134a
 Follow only Approved R600a service procedure & a Qualified technician while repairing.



Risk of fire



WARNING


Caution: Read all the labels attached to the various parts of the unit when repairing or servicing the refrigerator. Do not attempt to repair or service the unit unless you have read the instructions in the manual. Do not use the unit if it has stopped working properly. Do not use the unit if it has stopped working properly. Do not use the unit if it has stopped working properly.

BLONNE AGENT: R600a (CH₂FCH₂)
 C₂H₂ (CYCLO PENTANE) AS PER TABLE

MFG. BY: WHIRLPOOL OF INDIA LTD.
 PLOT NO. A-4, M.I.D.C.
 KANJANGAON, TAL. SHIBUR,
 DIST. PUNE - 412 204

"WHIRLPOOL" IS A REGISTERED TRADEMARK OF "WHIRLPOOL CORPORATION USA".

WIRING DIAGRAM

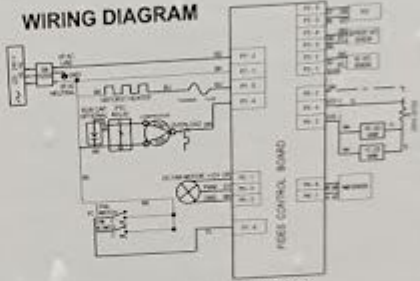

SYMBOL CODE
 ○ = CONNECTION - SCREW ON
 ⊕ = CONNECTION - CLOSED END
 ⊖ = DISCONNECT TERMINAL
 ● = PERMANENT CONNECTION
 ⊕ = PLUS CONNECTION
 ⊖ = GROUNDING (FOR CHASSIS)

WIRE COLOR CODE
 BU = BLUE
 BK = BLACK
 RD = RED
 WH = WHITE
 YL = YELLOW
 GR = GREEN
 BR = BROWN
 PK = PINK
 GR = GRAY
 OR = ORANGE
 BLK = BLACK
 BLK/WH = BLACK/WHITE
 BLK/BR = BLACK/BROWN
 BLK/GR = BLACK/GRAY

NAME	MODEL	GROSS CAPACITY	STORAGE CAPACITY	REFRIGERANT TYPE (GALLON/LITERS)
L10-0702A	WTM11702 R	40L	40L	R600a

W11175079

REDMI NOTE 8 PRO
 AI QUAD CAMERA



● ○ REDMI NOTE 8 PRO
○ ○ AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

E	E1130DZ	CSIR	220/60	390	1.35	F	NE	NE6213CK	CSF
	EU1121DZ	RSCR	220/60	325	1.52	F		NE6213BK	CSF
S	SK35XZ	RSIR	127/60	88	1.38	S	CT6217CK	CSF	
L	LU65XZ	RSIR	127/60	190	1.52	S	CT6220CK	CSF	
E	EU1121XZ	CSIR	127/60	250	1.50	F	CJ6228CK	CSF	
R600a L.B.P 宽电压									
S	S66CY	RSIR	160~260/50	108	1.20			CJ6232CK	CSF
	SG66CY	RSIR	160~260/50	108	1.40			CJ6240CK	CSF
	SU66CY	RSCR	160~260/50	108	1.60				
	SZ66CY	RSCR	160~260/50	108	1.70				
L	L88CYA	RSIR	160~260/50	155	1.36	S			
	L111CYA	RSIR	160~260/50	185	1.40	S			
	LK76CYA	RSCR	160~260/50	142	1.50	S			
	LK88CYA	RSCR	160~260/50	155	1.50	S			
R290 H.B.P									
							NB	NB5175CU	RSIF
							NE	NE5195CU	RSIF

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_L111CYATélécharger