


Mbsm.pro, LS19GBBDI, LG Refrigerator, 17.9 Cu.Ft, Silver PCM Color, Smart Inverter, Domper Compressor, vfl110cy1, 1/4 hp, r600a

written by rober us | 29 March 2023



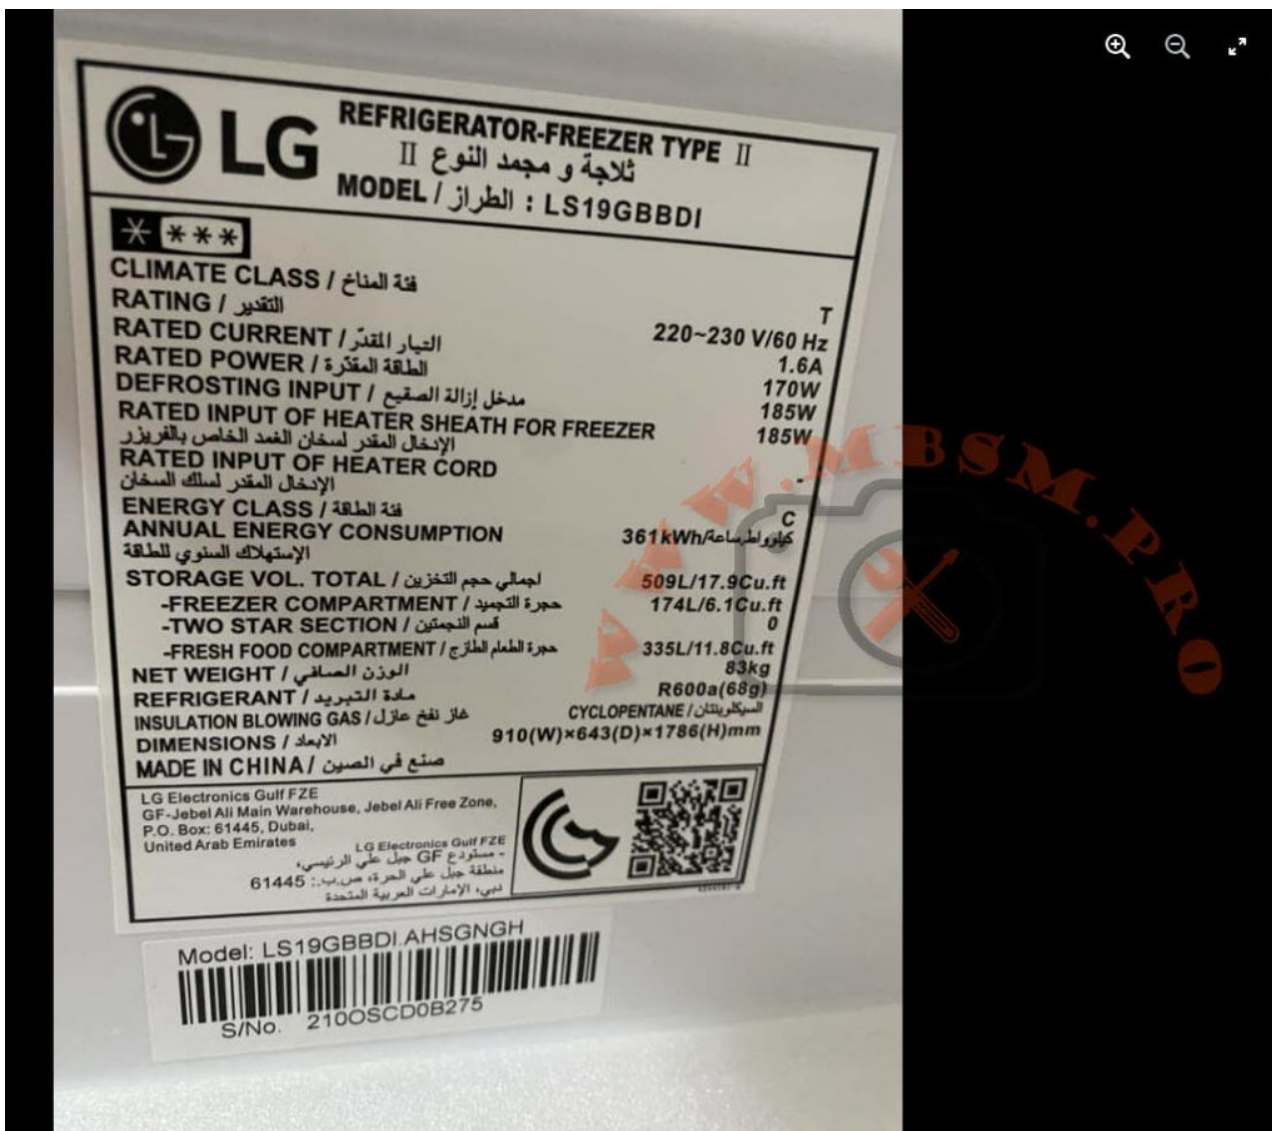

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Type□	frequency conversion	Model□	VFL110CY1
Refrigerant□	R600a	Voltage□	
Frequency□		Application□	LBP
HP□		Displacement (cm ³)□	11

Cooling□	ST	Lubricant Type□	
Lubricant(ml)□		Motor Type□	BLDC
Starting Type□		Starter□	

Mbsm.pro, Files, PDF, compressori ortiz, all compressor in one file

written by rober us | 29 March 2023

CONDIZIONI DI RESA **ASHRAE** **TEMP.EVAPORAZIONE** **MOTORE V.220/50Hz**

Temp. condens: + 55 da - 25 a +10°C (MBP-HBP) CSIR=Condensatore di spunto e rele
Temp. liquido: + 46(32) da - 40 a -10°C (LBP) CSR=Condens. di spunto,marcia, rele.
Temp. ambiente: + 35 3Phase= V.380/50Hz
Temp. Gas aspir.: + 35

ATTACCHI A SALDARE

R. 404 (MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE-	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore V220	PREZZO EURO,00
			Resa -10°	Watt 0°				
404H2105	NB 6144 GK	1/6	297	450	4.38	331	CSIR	142
404H2110	NB 6152 GK	1/5	351	530	4.85	375	CSIR	148
404H2115	NB 6165 GK	1/4	413	611	6.00	511	CSIR	155
404H2120	NB 6181 GK	1/4P	514	774	7.40	567	CSIR	160
404H2125	NE 6210 GK	1/3	595	935	8.90	620	CSIR	168
404H2130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
404H2135	T 6217 GK	3/4	961	1515	14.50	1000	CSIR	290
404H2140	T 6220 GK	3/4	1164	1826	17.40	1100	CSR	328
404H2145	T 6222 GK	1	1554	2381	22.30	1500	CSR	340
404H2150	NJ/J 9226 GK	1	1587	2475	21.70	1320	CSR	400
404H2155	NJ/J 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
404H2160	NJ/J 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
404H2165	NJ/J 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
404H2170	NJ/J 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
404H2175	NJ/J 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_compressori

ortiz

Embraco



CONDIZIONI DI RESA	ASHRAE	TEMP. EVAPORAZIONE	MOTORE V.220/50Hz
Temp. condens.: + 55	da - 25 a + 10°C (MBP-HBP)		CSR-Condensatore di spurto e rete
Temp. liquida: + 46(32)	da - 40 a - 10°C (LBP)		CSR-Condens. di spurto,marcia, rete.
Temp. ambiente: + 35			3Phase- V.380/50Hz
Temp. Gas aspir.: + 35			

ATTACCHI A SALDARE

R. 404 (MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore VZ20	PREZZO EURO,00
			Resa -10°	Watt 0°				
4042105	NB 6144 GK	1/6	297	450	4.38	331	CSR	142
4042110	NB 6152 GK	1/5	351	530	4.85	375	CSR	148
4042115	NB 6165 GK	1/4	413	611	6.00	511	CSR	155
4042120	NB 6181 GK	1/4P	514	774	7.40	567	CSR	160
4042125	NE 6210 GK	1/3	585	935	8.90	620	CSR	168
4042130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
4042135	T 6217 GK	3/4	961	1515	14.50	1000	CSR	290
4042140	T 6229 GK	3/4	1164	1826	17.40	1100	CSR	328
4042145	T 6232 GK	1	1554	2381	22.30	1500	CSR	340
4042150	NJ 9226 GK	1	1587	2475	21.70	1520	CSR	400
4042155	NJ 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
4042160	NJ 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
4042165	NJ 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
4042170	NJ 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
4042175	NJ 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

SAMSUNG RSA1ZTWP

written by rober us | 29 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, regenerator, SAMSUNG, RSA1ZTWP, 555 L, Compressor,

1/3 hp



Private Picture Copyright : WWW.MBSM.PRO

SAMSUNG



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



S/N:Y2EH4ADD100340F

English Specification	Technical Value	Arabic Translation
REFRIGERATOR MODEL :	RSA1NTWP	طراز الثلاجة
DIMENSION (W X D X H) :	912mm X 734mm X 1738mm	الأبعاد (العرض × العمق × الارتفاع)
GROSS CAPACITY :	555 ltr	السعة الإجمالية
SASO VOLUME :	18.57 Cu.ft	حجم SASO
RATED VOLTAGE :	220V-	الجهد المقدر
RATED FREQUENCY :	50-60Hz	التردد المقدر
RATED CURRENT :	0.8A	التيار المقدر
DEFROSTING INPUT :	280W	إدخال طاقة الذوبان
POWER CONSUMPTION :	2.25kWh/24h	استهلاك الطاقة
PERCENTAGE RUNNING TIME :	96%	النسبة المئوية لمدة التشغيل
CLIMATIC CLASS OF THE APPLIANCE :	T	الفئة المناخية للجهاز
INSULATION CLASS OF MOTOR COMPRESSOR WINDING :	B	فئة عزل لفات مضاعف المحرك
RATED MAXIMUM INPUT OF LAMP :	(FREEZER) LED 1.8W (REFRIGERATOR) LED 1.5W	المد الأقصى للإضاءة المقدر للمصابيح
NAME OF REFRIGERANT :	R-134a	الغاز المبرد بالثلاجة
QUANTITY OF REFRIGERANT :	0.19kg	حجم الغاز المبرد
INSULATION BLOWING GAS :	CYCLO-PENTANE	غاز العزل المتدفق
YEAR OF MANUFACTURE :	2013	سنة التصنيع
MADE IN CHINA		صنوع في الصين

DA99-01770X (R)



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

**Mbsm.pro, Compressor, a13rv,
1/2 hp, Capacitor starting 53
to 64 mfr**

written by Lilianne | 29 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, a13rv, 1/2 hp, Capacitor starting 53 to 64 mrf

**Mbsm.pro, Compressor,
Embraco, EMY3118Y, R600, 1/5
hp, 1bp**

written by Lilianne | 29 March 2023



Mbsm.pro, Compressor, Embraco, EMY3118Y, R600, 1/5 hp, 1bp

**Mbsm.pro, Compressor,
Hdz100a, Zel, R600a, 90 w,
1/12 hp, 1bp**

written by Lilianne | 29 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Hdz100a, Zel, R600a, 90 w, 1/12 hp, 1bp

freezer Kiriazi, E336, E335

written by Lilianne | 29 March 2023



Mbsm.pro, freezer Kiriazi, 336 L, e336, Compressor, 1/5 hp, r134a, 200 g

Mbsm.pro, Compressor, GLY80AA, 1/5 hp, Danfoos

written by Lilianne | 29 March 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, GLY80AA, 1/5 hp, Danfoos

Mbsm.pro, compressor, DG51C69RAU6, 1/3 hp

written by Lilianne | 29 March 2023



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, compressor, DG51C69RAU6, 1/3 hp

Mbsm.pro, Pictures, Cat5

cabling pin-out configuration

written by Lilianne | 29 March 2023

Pin ID	side A	side B
1	Orange-white	green-white
2	Orange	green
3	green-white	orange-white
4	blue	brown-white
5	blue-white	Brown
6	green	orange
7	brown-white	Blue
8	brown	blue-white

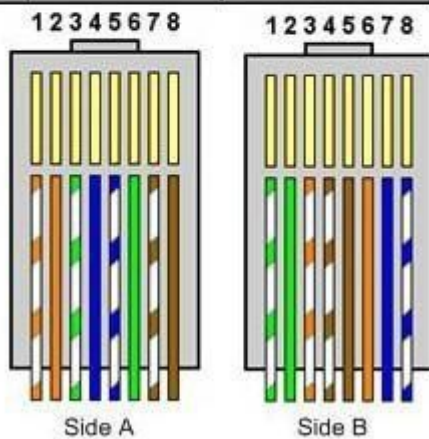

te Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Pictures, Cat5 cabling pin-out configuration