

**Compressor, Hitachi, R134a,  
(série R012), FL1462-SA,  
HITACHI Brand , (Made in  
Thailand), 1/5 Hp, 160w, FL  
0739 (90 Watts), FL 0847 (105  
Watts), FL 1152 (125 Watts),  
FL 1257 (150 Watts), FL 1462  
165 Watts), FL 1675 (185  
Watts), FL 1888 (210 Watts),  
FL 2088 (250 Watts)**

written by Lilianne | 13 January 2021  
HITACHI Brand (Thailand)

Model

FL 0739 (90 Watts)

FL 0847 (105 Watts)

FL 1152 (125 Watts)

FL 1257 (150 Watts)


FL 1462 (165 Watts)

FL 1675 (185 Watts)

FL 1888 (210 Watts)

FL 2088 (250 Watts)

Code No.	Model	HP	Capacity (W)	Current (A)	Efficiency COP (w/w)	Voltage / Frequency
<b>R134a Models</b>						
R012001	FL 06S34-TAB	1/12	85	0.70	0.93	
R012002	FL 0739-SQ	1/10	114	0.72	1.20	
R012003	FL 0847-SD	1/8	130	0.83	1.19	
R012005	FL 1152-SB	1/6	143	0.82	1.27	
R012006	FL 1257-SR	1/5	160	0.90	1.25	
R012007	FL 14S62-TAD	1/5	175	0.95	1.30	
R012008	FL 1568-SQ	1/4	200	1.11	1.30	
R012009	FL 20S88-TAC	1/3	255	1.50	1.25	
R012010	FL1888-SE	1/3	245	1.51	1.25	
<b>R600a Models</b>						
	CL 0545-SZ	1/12	62	0.70	1.12	220V – 240V / 50Hz
	CL 1297-SA	1/5	156	0.90	1.46	
	CL 1310-SA	1/5+	163	0.95	1.48	
<b>R600a Models (Inverter)</b>						
	CL 1588-DZ	1/6	134	0.83	1.62	220V – 240V / 50Hz
	CL 1610-DL	1/5	160	0.90	1.65	

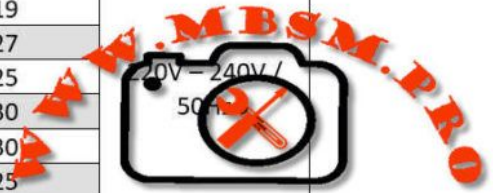



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Mbsm\_dot\_pro\_private\_PDF\_FL1462-SA\_Hitachi-catalogueTélécharger

# **TECUMSEH EUROPE, COMPRESSEUR, REFROIDISSEUR, AE1360AS, 1/5 HP, AE140-FS-510, Lra 9.5, LBP, R12, 220-240V ~ 50Hz**

written by Lilianne | 13 January 2021

Model:AE1360AS

Product Description

Type: Reciprocating

Application: LBP – Low Back Pressure

Refrigerant: R12

Voltage/Frequency: 220-240V ~ 50Hz

Product Specifications

Performance

Refrigeration Capacity Input Power Efficiency

EVAP

TEMP COND AMBIENT RETURN LIQUID

Condition TEMP TEMP GAS TEMP

Test

Voltage Btu/h kcal/h W W Btu/Wh kcal/Wh W/W

ASHRAE

240V ~

50HZ 560 141 164 157 3.57 .9 1.05

-23°C (-

10°F) 54°C (130°F) 32°C (90°F) 32°C (90°F) 32°C (90°F)

General

Evaporating Temp. Range: -34.4°C to -12.2°C (-30°F to 10°F)

Motor Torque:

Low Start Torque

(LST)

Compressor Cooling: Static  
Mechanical

Weight: 10.231

Weight Unit of Measure: KG

Displacement (cc): 7.55

Oil Type: N/A

Viscosity (cSt): N/A

Oil Charge (cc): N/A

Electrical

Voltage Range (50 Hz): 198-253

Voltage Range (60 Hz): N/A

Locked Rotor Amps (LRA): 11

Rated Load Amps (RLA 50 Hz): 1.12

Rated Load Amps (RLA 60 Hz): N/A

Max. Continuous Current (MCC in Amps): N/A


Motor Resistance (Ohm) – Main: 11.06

Motor Resistance (Ohm) – Start: 44.87

Motor Type: RSIR

Overload Type: N/A

Relay Type: Current Relay

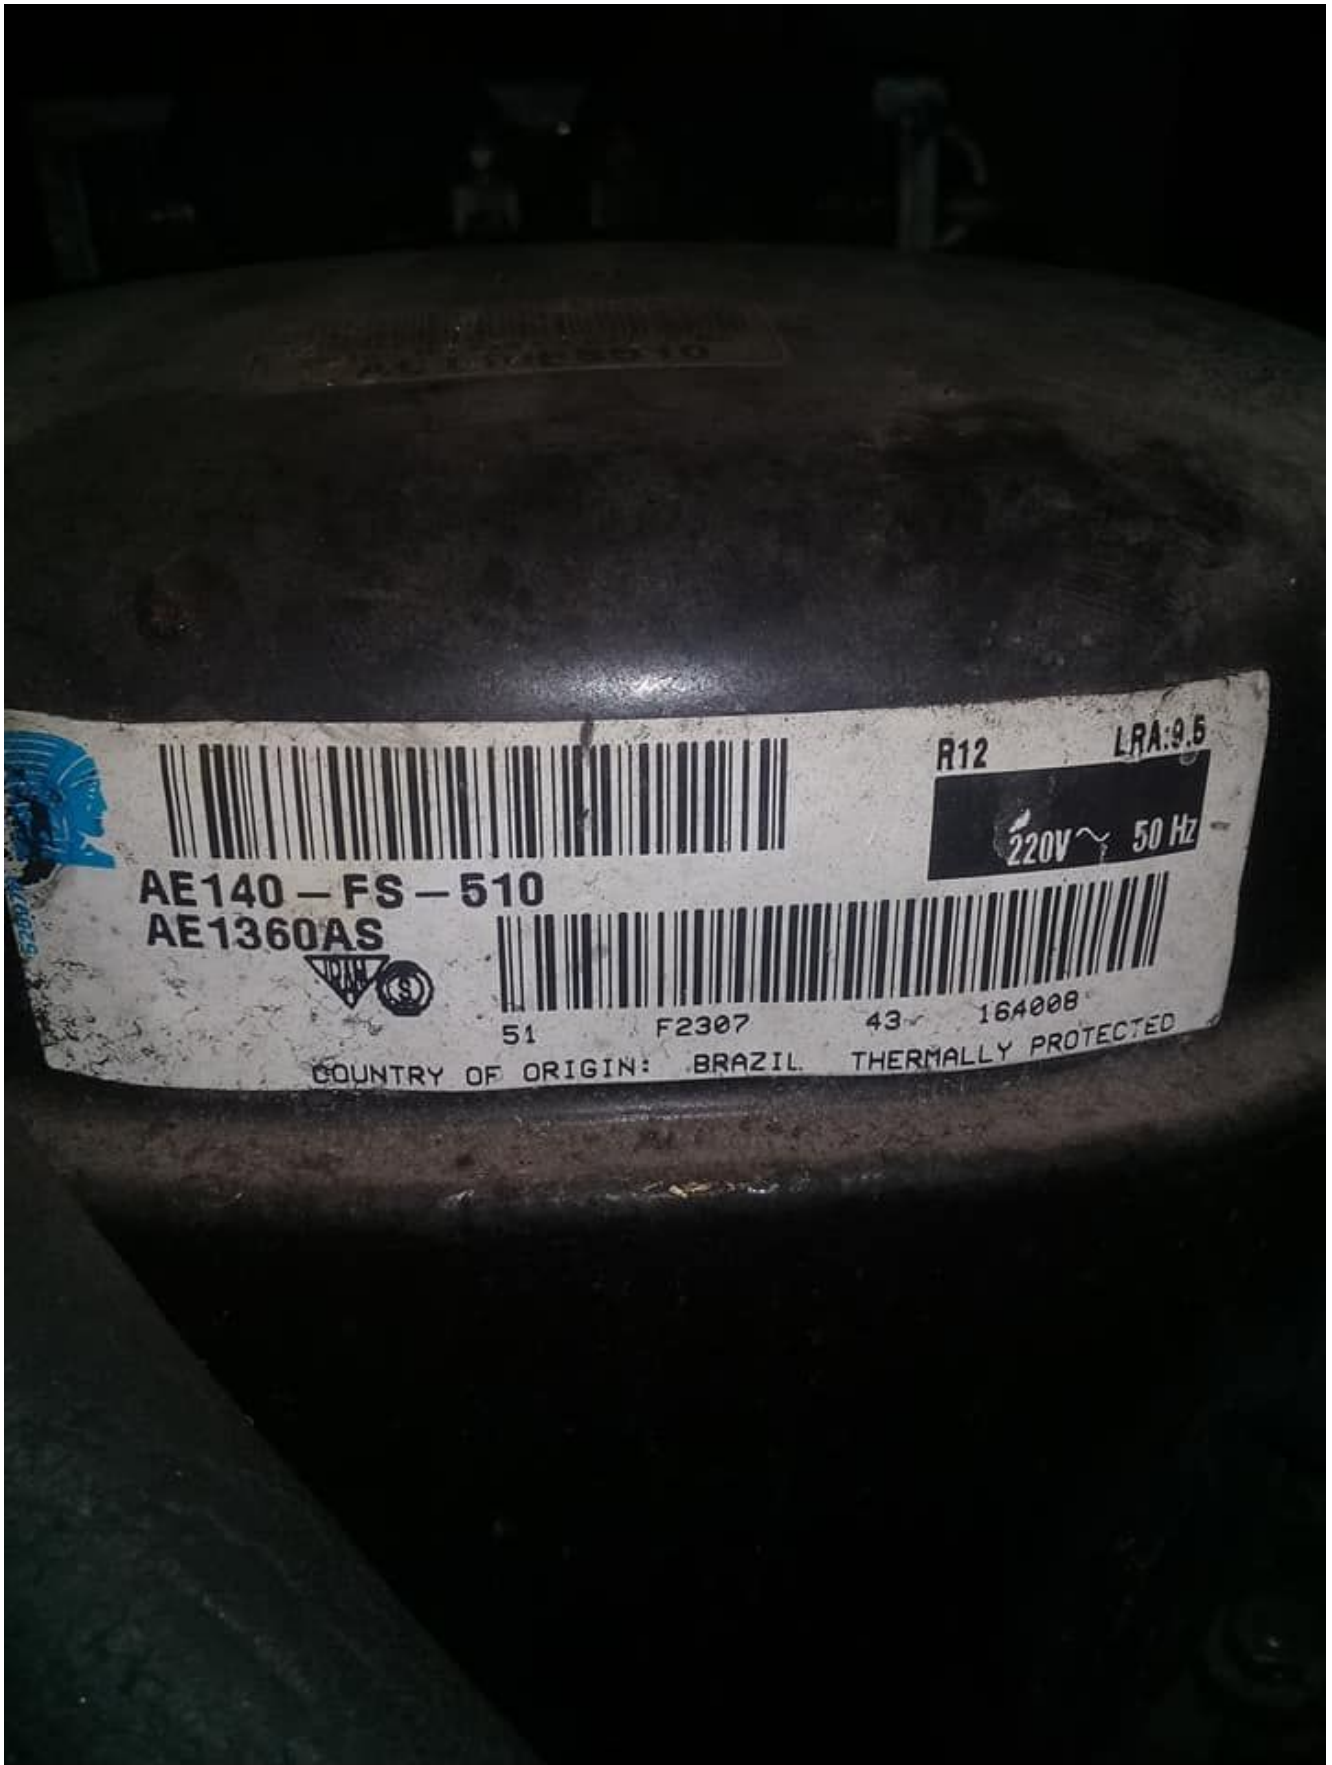

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_AE1360ASTélécharger

Mbsm\_dot\_pro\_private\_PDF\_AE1360AS-1Télécharger

Mbsm\_dot\_pro\_private\_PDF\_AE1360AS-2Télécharger

---

**Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5 cm cube, 220-240 v 50 hz**

written by Lilianne | 13 January 2021

Sangchai refrigeration, Fl series, Rl series, Cl series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Deplacement 7.5, 220-240 v 50 hz



Mbsm\_dot\_pro\_private\_PDF\_Hitachi-catalogueTélécharger

Mbsm\_dot\_pro\_private\_PDF\_FL1675Télécharger

---

**Compresseur, réfrigération  
EMBRACO, FF7.5HBK1, FF7.5HBK,  
R12, 1/5++ HP, (1/4hp) R134a,**

# 158f/h, Ffc60bk, Kiriazi Egypt k 330, 330L

written by Lilianne | 13 January 2021

Conçu pour faire circuler le réfrigérant R12. Ce compresseur remplace un compresseur usé ou cassé pour maintenir votre unité en parfait état et minimiser les temps d'arrêt. 1/5 + ch. 115V.

Ancien numéro de  
pièce FF7.5BK

Tecumseh #  
AEA3425AXA

Copeland #  
ARE25C3-IAA

Compresseur de réfrigération Embraco Universal FF7.5HBK . Contre-pression faible, moyenne et élevée. 1/5 + HP nominal du moteur. À utiliser avec les réfrigérateurs, les machines à glaçons, les armoires pour produits surgelés, les vitrines de produits surgelés, les vitrines, etc.

Remplace Copeland ARE25C3E-IAA, Embraco EMI60HER, FF6HBK, EME60HER, EM65HHC, EM65HNR et EGY70HLP et Tecumseh AEA1360YXA et AEA3425YXA.

Moteur: Résistive Start Inductive Run (RSIR)

Températures d'évaporation: -10 ° F à 45 ° F

## Spécifications du produit

Capacité BTU HBP:	2760
Capacité BTU LBP & amp; MBP:	630
Puissance (HP):	1/5 +
Ampères à rotor bloqué (LRA):	25,0
Type de moteur:	RSIR



Niveau de compétence:	
Couple de démarrage:	Ordinaire
Volts (V):	120

 **Embraco FF 7.5BK**

3065

THERMALLY PROTECTED

10 LRA

R12

1

H

220/240V~  
50Hz

JOINVILLE - SC


MADE IN BRAZIL



513203969



0310

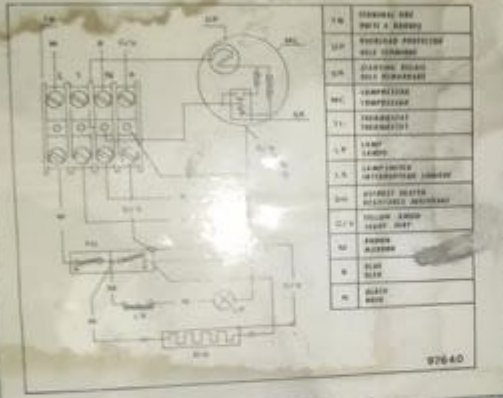

1M	STARTING RELAY
2M	STARTING RELAY
3M	STARTING RELAY
4M	STARTING RELAY
5M	STARTING RELAY
6M	STARTING RELAY
7M	STARTING RELAY
8M	STARTING RELAY
9M	STARTING RELAY
10M	STARTING RELAY
11M	STARTING RELAY
12M	STARTING RELAY
13M	STARTING RELAY
14M	STARTING RELAY
15M	STARTING RELAY
16M	STARTING RELAY
17M	STARTING RELAY
18M	STARTING RELAY
19M	STARTING RELAY
20M	STARTING RELAY
21M	STARTING RELAY
22M	STARTING RELAY
23M	STARTING RELAY
24M	STARTING RELAY
25M	STARTING RELAY
26M	STARTING RELAY
27M	STARTING RELAY
28M	STARTING RELAY
29M	STARTING RELAY
30M	STARTING RELAY
31M	STARTING RELAY
32M	STARTING RELAY
33M	STARTING RELAY
34M	STARTING RELAY
35M	STARTING RELAY
36M	STARTING RELAY
37M	STARTING RELAY
38M	STARTING RELAY
39M	STARTING RELAY
40M	STARTING RELAY
41M	STARTING RELAY
42M	STARTING RELAY
43M	STARTING RELAY
44M	STARTING RELAY
45M	STARTING RELAY
46M	STARTING RELAY
47M	STARTING RELAY
48M	STARTING RELAY
49M	STARTING RELAY
50M	STARTING RELAY
51M	STARTING RELAY
52M	STARTING RELAY
53M	STARTING RELAY
54M	STARTING RELAY
55M	STARTING RELAY
56M	STARTING RELAY
57M	STARTING RELAY
58M	STARTING RELAY
59M	STARTING RELAY
60M	STARTING RELAY
61M	STARTING RELAY
62M	STARTING RELAY
63M	STARTING RELAY
64M	STARTING RELAY
65M	STARTING RELAY
66M	STARTING RELAY
67M	STARTING RELAY
68M	STARTING RELAY
69M	STARTING RELAY
70M	STARTING RELAY
71M	STARTING RELAY
72M	STARTING RELAY
73M	STARTING RELAY
74M	STARTING RELAY
75M	STARTING RELAY
76M	STARTING RELAY
77M	STARTING RELAY
78M	STARTING RELAY
79M	STARTING RELAY
80M	STARTING RELAY
81M	STARTING RELAY
82M	STARTING RELAY
83M	STARTING RELAY
84M	STARTING RELAY
85M	STARTING RELAY
86M	STARTING RELAY
87M	STARTING RELAY
88M	STARTING RELAY
89M	STARTING RELAY
90M	STARTING RELAY
91M	STARTING RELAY
92M	STARTING RELAY
93M	STARTING RELAY
94M	STARTING RELAY
95M	STARTING RELAY
96M	STARTING RELAY
97M	STARTING RELAY
98M	STARTING RELAY
99M	STARTING RELAY
100M	STARTING RELAY

97640



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Mbsm\_dot\_pro\_private\_PDF\_aftermarket-line-of-products-complete-en-jan-2020-4Télécharger  
Mbsm\_dot\_pro\_private\_PDF\_Ff75bkTélécharger

---

**Samsung, réfrigérateur,**

# MSA150H-L1A, compresseur, R134A, 220-240 V/50Hz, LBP, 1/6 HP, 1/5 HP, 177 w

written by Lilianne | 13 January 2021



Samsung Reciprocating Compressor est un partenaire mondial qui fournit des fonctionnalités durables et respectueuses de l'environnement pour tous vos besoins de refroidissement. Il existe quatre séries de compresseurs à piston: MAS, NC, MSE, MSV

Modèle	moteur	V-Hz								
			Kcal / heure	Watt	BTU / heure	Watt	Kcal / Wh	W / W	BTU / Wh	AMP
MSA141C-S1A	PTC-RSIR	115-60	121	140	479	98,3	1,23	1,43	4,87	1,35
MSA141C-S1B	PTC-RSCR	115-60	121	140	479	93,5	1,29	1,50	5,13	0,91
MSA143C-S1B	PTC-RSCR	115-60	121	140	479	91,5	1,32	1,53	5,23	0,91
MSA150C-L1A	PTC-RSIR	115-60	148	172	588	119,8	1,24	1,44	4,90	1,63
MSA151C-L1B	PTC-RSCR	115-60	148	172	588	110,0	1,35	1,56	5,34	1,03
MSA151C-L1G	PTC-RSCR	115-60	148	172	588	105,2	1,41	1,64	5,58	0,96
MSA152C-L1G	PTC-RSCR	115-60	148	172	588	102,2	1,45	1,68	5,74	0,93
MSA160C-L1A	PTC-RSIR	115-60	182	212	723	150,9	1,21	1,40	4,79	2,10
MSA161C-L1A	PTC-RSIR	115-60	182	212	723	148,0	1,23	1,43	4,88	2,06
MSA170C-L1B	PTC-RSCR	115-60	214	249	850	155,8	1,38	1,60	5,46	1,65
MSA171C-L1B	PTC-RSCR	115-60	214	249	850	157,7	1,36	1,58	5,39	1,65
NC1A30DLA	PTC-RSIR	115-60	78	91	309	76,9	1,01	1,18	4,02	1,05
NC1A37DLB	PTC-RSCR	115-60	105	122	418	97,4	1,08	1,26	4,29	0,92

NC1A43DLB	PTC-RSCR	115-60	117	136	464	98,3	1,19	1,38	4,71	0,94
MSA162D-S1G	PTC-RSCR	115-60	182	212	723	129,5	1,41	1,63	5,58	1,39
		127-60	182	212	723	129,5	1,41	1,63	5,58	1,39
NC1A37HLB	PTC-RSCR	220-50	88	102	348	81,8	1,07	1,25	4,25	0,50
		220-60	105	122	418	98,2	1,07	1,25	4,25	0,48
NC1A43HLB	PTC-RSCR	220-50	93	108	367	83,7	1.10	1,28	4,38	0,52
		220-60	117	136	464	105,8	1.10	1,28	4,38	0,49
MSA141H-L1A	PTC-RSIR	220-50	93	109	371	80,8	1,16	1,34	4,59	0,67
		220-60	121	140	479	104,4	1,16	1,34	4,59	0,66
MSA150H-L1A	PTC-RSIR	220-50	122	142	483	107,1	1.14	1,32	4,51	0,86
		220-60	148	172	588	130,2	1.14	1,32	4,51	0,81
MSA160H-L1A	PTC-RSIR	220-50	147	171	584	132,4	1.11	1,29	4,41	1.12
		220-60	182	212	723	164,0	1.11	1,29	4,41	1,02
MSA161H-L1A	PTC-RSIR	220-50	147	171	584	131,5	1.12	1,30	4,44	1.10
		220-60	182	212	723	162,8	1.12	1,30	4,44	1,00
MSA170H-L1B	PTC-RSCR	220-50	168	196	669	137,3	1,23	1,43	4,87	0,81
		220-60	214	249	850	174,6	1,23	1,43	4,87	0,72
MSA170H-L1G	PTC-RSCR	220-50	168	196	669	124,6	1,35	1,57	5,36	0,73
		220-60	214	249	850	158,5	1,35	1,57	5,36	0,73
MSA171H-L1B	PTC-RSCR	220-50	168	196	669	138,3	1,22	1,42	4,83	0,78
		220-60	214	249	850	175,8	1,22	1,42	4,83	0,76
NC1A37BLA	PTC-RSIR	220-60	105	122	418	100,3	1,05	1,22	4.16	0,70
MSA162B-L1G	PTC-RSCR	220-60	182	212	723	126,6	1,44	1,67	5,71	0,60
NC1A30GLA	PTC-RSIR	220-50	66	77	263	69,1	0,96	1.11	3,80	0,59
		220-60	78	91	309	81,3	0,96	1.11	3,80	0,54
MSA151G-L1B	PTC-RSCR	220-50	120	139	475	91,5	1,31	1,52	5,19	0,50
		220-60	148	172	588	113,1	1,31	1,52	5,19	0,50
MSA162G-L1B	PTC-RSCR	220-50	147	176	599	112,0	1,31	1,53	5,21	0,70
		220-60	182	217	742	138,7	1,31	1,53	5,21	0,67
NC1A37QLB	PTC-RSCR	220-50	88	102	348	77,9	1.13	1,31	4,46	0,43
MSA141Q-S1A	PTC-RSIR	220-50	93	109	371	80,8	1,16	1,34	4,59	0,67
MSA150Q-L1A	PTC-RSIR	220-50	122	142	483	101,3	1,20	1,40	4,77	0,71
		240-50	122	142	483	101,3	1,20	1,40	4,77	0,74

MSA153Q-L1A	PTC-RSIR	220-50	122	142	483	108,1	1,13	1,31	4,47	0,78
		240-50	122	142	483	108,1	1,13	1,31	4,47	0,82
MSA160Q-L1A	PTC-RSIR	220-50	147	171	584	122,7	1,20	1,39	4,76	0,87
		240-50	147	171	584	122,7	1,20	1,39	4,76	0,91
MSA161Q-L1A	PTC-RSIR	220-50	147	171	584	118,8	1,24	1,44	4,91	0,86
		240-50	147	171	584	118,8	1,24	1,44	4,91	0,90
MSA161Q-L1B	PTC-RSCR	220-50	147	171	584	113,0	1,30	1,51	5,17	0,65
		240-50	147	171	584	113,0	1,30	1,51	5,17	0,65
MSA162Q-L1G	PTC-RSCR	220-50	147	171	584	103,2	1,42	1,66	5,65	0,48
MSA163Q-L1A	PTC-RSIR	220-50	147	171	584	130,5	1,13	1,31	4,47	0,94
		240-50	147	171	584	130,5	1,13	1,31	4,47	1,02
MSA170Q-L1B	PTC-RSCR	220-50	168	196	669	125,6	1,34	1,56	5,32	0,61
MSA170Q-L1G	PTC-RSCR	220-50	168	196	669	119,8	1,41	1,64	5,58	0,58
MSA171Q-L1B	PTC-RSCR	220-50	168	196	669	127,6	1,32	1,54	5,24	0,63
NC1A43KLB	PTC-RSCR	220-50	93	108	367	81,8	1,13	1,32	4,49	0,46
MSA141K-L1A	PTC-RSIR	220-50	93	109	371	83,7	1,12	1,30	4,43	0,65
MSA141K-S1A	PTC-RSIR	220-50	93	109	371	80,8	1,16	1,34	4,59	0,67
MSA141K-S1B	PTC-RSCR	220-50	93	109	371	76,9	1,22	1,41	4,82	0,44
MSA143K-S1B	PTC-RSCR	220-50	93	109	371	75,0	1,25	1,45	4,95	0,45
MSA151K-S1G	PTC-RSCR	220-50	122	142	483	99,3	1,23	1,42	4,86	0,57
MSA162K-S1G	PTC-RSCR	220-50	147	171	584	113,9	1,29	1,50	5,12	0,62
MSA170K-S1G	PTC-RSCR	220-50	168	196	669	128,5	1,31	1,52	5,20	0,73
MSA150E-L1A	PTC-RSIR	100-50	122	142	483	109,1	1,12	1,30	4,43	1,88
		100-60	148	172	588	132,6	1,12	1,30	4,43	1,80
MSA160E-L1A	PTC-RSIR	100-50	147	171	584	135,4	1,09	1,26	4,31	2,45
		100-60	182	212	723	167,6	1,09	1,26	4,31	2,25
MSA162P-S1B	PTC-RSCR	127-60	182	217	742	133,4	1,36	1,59	5,42	1,17



Model	Motor Type	Voltage [V-Hz]	Cooling Capacity			Power Input W	Efficiency			Cooling Type
			kcal/Hr	Watt	BTU/Hr		EFF Kcal/WHr	COP W/W	EER BTU/WHr	
CD124Q-L1Z2	RSIR	220-50	43	50	171	57	0.75	0.88	2.99	ST
CD130Q-L1Z2	RSIR	220-50	58	67	230	65	0.89	1.04	3.54	ST
CD130Q-S1ZA	RSIR	220-50	58	67	230	74	0.78	0.91	3.11	ST
SD137Q-L1ZB	RSIR	220-50	75	87	298	86	0.87	1.01	3.46	ST
SD137Q-L1UB	RSCR	220-50	75	87	298	80	0.94	1.09	3.72	ST
SD143Q-L1U2	RSCR	220-50	95	110	377	99	0.96	1.12	3.81	ST
MSA143Q-S1Z	RSIR	220-50	96	112	381	83	1.16	1.34	4.59	ST
SD152Q-L1UB	RSCR	220-50	120	140	476	104	1.15	1.34	4.58	ST
MD152Q-L1U2	RSCR	220-50	118	137	468	98	1.2	1.4	4.78	ST
SD162Q-L1UB	RSCR	220-50	146	170	580	125	1.17	1.36	4.64	ST
MK162Q-L1UA	RSCR	220-50	145	169	576	105	1.38	1.61	5.48	ST
MSS162Q-L1U	RSCR	220-50	151	176	599	105	1.44	1.67	5.71	ST
MSA162Q-L1G	RSCR	220-50	151	176	599	111	1.36	1.58	5.4	ST
SK170Q-L1U	RSCR	220-50	168	195	667	141	1.19	1.39	4.73	ST/OC
MSA170Q-L1B	RSCR	220-50	173	201	687	129	1.34	1.56	5.32	ST
MSA170Q-L1G	RSCR	220-50	173	201	687	126	1.37	1.6	5.45	ST
MK172Q-L2UB	RSCR	220-50	176	205	699	129	1.36	1.59	5.42	FC
SK182Q-L2U	RSCR	220-50	203	236	806	164	1.24	1.44	4.91	FC/OC
MK183Q-L2UB	RSCR	220-50	203	236	806	142	1.43	1.66	5.68	FC
SK190Q-L2U	RSCR	220-50	227	264	901	180	1.26	1.47	5.01	FC/OC
MK190Q-L2U	RSCR	220-50	225	262	893	157	1.43	1.67	5.69	FC
SK1A1Q-L2UB	RSCR	220-50	275	320	1092	229	1.2	1.4	4.77	FC
NC1A37QLB	RSCR	220-50	90	105	357	80	1.13	1.31	4.47	ST

Cooling Type	Motor Type	ASHRAE Conditions (LBP)	Unit Conversion Table
FC : Fan cooling	RSIR : Resistance Start Induction Run	Evaporating Temp. : -23.3°C (-10°F)	1 watt = 3.41 Btu/Hr
OC : Oil cooling	RSCR : Resistance Start Capacitor Run	Condensing Temp. : 54.4°C (130°F)	1 watt = 0.86 Kcal/Hr
ST : Static	CSIR : Capacitor Start Induction Run	Gas Superheated to : 32.2°C (90°F)	1 Kcal/Hr = 3.97 Btu/Hr
	CSR : Capacitor Start Capacitor Run	Liquid sub-cooled to : 32.2°C (90°F)	
		Ambient Temp. : 32.2°C (90°F)	

Private Picture Copyright : WWW.MBSM.PRO

## Détails rapides

N ° de modèle:	MSA150H-L1A
Capacité de refroidissement:	177 W
Réfrigérant:	R134A
Application:	Réfrigérateur
Tension:	220V 60Hz
Marque déposée:	samsung



Private Picture Copyright : WWW.MBSM.PRO

Tension	Modèle	Type de moteur	Capacité de refroidissement / w (50Hz)	Capacité de refroidissement / w (60Hz)	Entrée / w (50Hz)	Entrée / w (60Hz)	COP (50 Hz)	COP (60 Hz)
200-220v 50Hz 220V 60Hz	MSA141H-L1A	RSIR	112	144	88	103	1,27	1,40
	MSA150H-L1A	RSIR	145	177	110	123	1,32	1,44
	MSA160H-L1A	RSIR	176	217	136	150	1,29	1,45
	MSA171H-L1B	RSCR	201	256	142	161	1,42	1,59
220-240V 50Hz	MSA151G-L1B	RSCR	143	177	94	110	1,52	1,61
220V 60Hz	MSA162G-L1B	RSCR	176	217	115	135	1,5	1,61



Private Picture Copyright : WWW.MBSM.PRO

RATED VOLTAGE	MODEL	MOTOR TYPE	VOLTAGE [V-Hz]	ASHRAE							COOLING TYPE
				COOLING CAPACITY			POWER INPUT	EFFICIENCY			
				kcal/h	Watts	Btu/h		Watts	EFF	COP	
AC 200-220V-50Hz, 220V-60Hz	MSA141H-L1A	RSIR	220-50	96	112	381	83	1.16	1.34	4.59	ST
			220-60	124	144	492	103	1.20	1.40	4.78	
	MSA143H-L1A	RSIR	220-50	95	110	377	85	1.12	1.30	4.43	ST
			220-60	128	149	508	102	1.25	1.46	5.00	
	MSA150H-L1A	RSIR	220-50	125	145	496	110	1.14	1.32	4.51	ST
			220-60	152	177	603	123	1.24	1.44	4.90	
	MSA151H-L1A	RSIR	220-50	128	149	508	107	1.20	1.39	4.75	ST
			220-60	152	177	603	121	1.26	1.46	5.00	
	MSA160H-L1A	RSIR	220-50	151	176	599	136	1.11	1.29	4.41	ST
			220-60	187	217	742	150	1.25	1.45	4.95	
	MSA161H-L1A	RSIR	220-50	151	176	599	135	1.12	1.30	4.44	ST
			220-60	187	217	742	149	1.26	1.46	4.98	
	MSA162H-L1A	RSIR	220-50	152	177	603	141	1.08	1.25	4.28	ST
			220-60	192	223	762	153	1.25	1.46	5.00	
	MSA162H-L1H	RSCR	220-50	152	177	603	110	1.38	1.61	5.50	ST
			220-60	192	223	762	134	1.43	1.67	5.70	
	MSA171H-L1B	RSCR	220-50	173	201	687	142	1.22	1.42	4.83	ST
			220-60	220	256	873	161	1.37	1.59	5.42	

Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm\_dot\_pro\_private\_PDF\_SAMSUNG-COMPRESSOR-2020Télécharger

# COMPRESSEUR, RÉFRIGÉRATION, 1/5 HP, ZR57AA, RSCR, Condensateur Run, LBP, 166 W, R134a

written by Lilianne | 13 January 2021

Modèle	ZR57AA (1 / 5HP)
<b>Caractéristiques</b>	
Type de moteur	RSCR (Condensateur Run) LBP
Volt	220 à 240 V, 50 Hz

Capacité de refroidissement	166 W
FLIC	1,48
La puissance d'entrée	112 W
Courant évalué	0,62 ampères
Réfrigérant	R134a



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright: WWW.MBSM.PRO



Mbsm\_dot\_pro\_private\_PDF\_ZR57AATélécharger



---

**ML60FB, CUBIGEL, ACC FRIDGE,  
COMPRESSOR, 220/240V 50Hz,  
1/5 Hp, displacement 6,00 cc**

# **gas 404/A – 507 LBP**

written by Lilianne | 13 January 2021

ML60FB, CUBIGEL, ACC FRIDGE, COMPRESSOR, 220/240V 50Hz, 1/5 Hp, displacement 6,00 cc gas 404/A – 507 LBP

---

**C-B Compressors, Kulthorn,  
1/5 HP, C-bz176L6Z,  
Refrigeration  
Compressor, R134A, 176W,  
, Original Specification,  
220-220V/50Hz, 220V/60Hz, Low  
Back Pressure**

written by Lilianne | 13 January 2021

C-B Compressors, Kulthorn, 1/5 HP, C-bz176L6Z, Refrigeration Compressor, R134A, 176W, , Original Specification, 220-220V/50Hz, 220V/60Hz, Low Back Pressure

---

**Compressor , Embraco Aspera**

**,NJ2212GK, LBP – R404A, R507,  
220-240V/1/50Hz, 1.5 HP,  
34.38 cm<sup>3</sup>, LRA 36.0 A, CSR,  
lubricant charge 750ml POE  
22, 1547 W ,at -23.3 / +54.4  
°**

written by Lilianne | 13 January 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Compressor ,Embraco Aspera ,NJ2212GK, LBP – R404A, R507,  
220-240V/1/50Hz, 1.5 HP, 34.38 cm<sup>3</sup>, LRA 36.0 A, CSR, lubricant  
charge 750ml POE 22, 1547 W ,at -23.3 / +54.4 °

---

**Compresseur, Samsung , 1/5  
HP, 155/160w , r600a  
,220/240v~50, Mk4a5qr1u,  
Mk4a5q-R1u, 5.5Lra, 1PHASE**

written by Lilianne | 13 January 2021

Compresseur, Samsung , 1/5 HP, 155/160w , r600a ,220/240v~50,  
Mk4a5qr1u, Mk4a5q-R1u, 5.5Lra, 1PHASE