

Mbsm.pro, Compressor, R600a, GMCC, Refrigerant, PZ90H1Y, SXF-562JA, 1/5hp, 167 W

written by Lilianne | 8 February 2022



Mbsm.pro, Compressor, R600a, GMCC, Refrigerant, PZ90H1Y, SXF-562JA, 1/5hp, 167 W

Mbsm.pro, Compressor, cubigel, huayi, ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

written by Lilianne | 8 February 2022

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a, Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR, Injection: Capillary operation, Displacement 14.32 cm³, Oil type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92
Shipping Class				Standard	
Scope Of Application				LBP	
Lieferzeit				2-3 Wochen	
Type Of Construction				Piston	
Condensation Temperature				55°C	
Maker				ACC	
Manufacturer No.				HPY14AA	
Displacement In Cm3				14.32	
Measuring Requirements				Ashrae	
Refrigerants				R600a	
Series				HPY	
Condensing Units Compressors				Compressors	
Suspense				220-240V	

Weight In Kg	13
---------------------	-----------

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP - R600a, 220- 240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm

customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm3):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger
Mbsm_dot_pro_private_PDF_HPYP14AATélécharger

L111CYA, COMPRESSOR, ASSY, Indesit , Ariston, whirlpool, 1/5hp, 1bp, 180W, r600a

written by Lilianne | 8 February 2022



Private Picture Copyright : WWW.MBSM.PRO

WARNING


Electrical Shock Hazard



Disconnect power before servicing.
 Any ground circuit disconnected during service must be reconnected.
 Do not reconnect unit to electrical supply until compressor terminal cover is securely in place.
 If refrigerant leak is suspected around compressor terminal, relieve all pressure from the system, keeping terminal cover in place.
 Failure to do so can result in death or electrical shock.

FREQUENCY	50 Hz
VOLTAGE RANGE	220-240 VAC
INPUT WATTS	175 W
INPUT CURRENT	1.3 A
COMFORT WATTS	600 W
COOLING CAPACITY	AS PER TABLE
CLIMATE CLASS	T

Do Not service with R134a
 Follow only Approved R600a
 service procedure & a
 Qualified technician while
 repairing.



Risk of fire




WARNING

Caution: Risk of fire
 Always observe the following points of caution when repairing or servicing the refrigerator since the refrigerant is a flammable gas:
 - Do not smoke, use flame or heat sources to charge the sealed system when the unit is still charged with refrigerant.
 - Do not use refrigerant with oily residues (see note below when recharging with).
 - Do not use oil or grease for refrigeration purposes.

BLUING AGENT R600a (CH ₂ FCH ₂ F)	C ₂ H ₂ (CYCLO PENTANE) AS PER TABLE
--	---

MFG. BY: WHIRLPOOL OF INDIA LTD.
 PLOT NO. A-4, M.I.D.C.
 KANJANGAON, TAL. SIBBUR,
 DIST. POHLE - 415 204
 "WHIRLPOOL" IS A REGISTERED TRADEMARK OF
 "WHIRLPOOL CORPORATION USA".

WIRING DIAGRAM

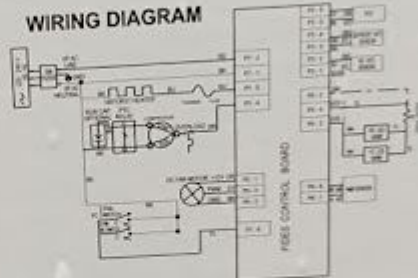

- SYMBOL CODE**
- ⊕ = CONNECTION - SCREW ON
 - ⊖ = CONNECTION - CLOSED END
 - ⊙ = DISCONNECT TERMINAL
 - ⊚ = PERMANENT CONNECTION
 - ⊕ = PLUS CONNECTION
 - ⊙ = GROUNDING (FOR CHASSIS)
- WIRE COLOR CODE**
- BL = BLUE
 - BR = BROWN
 - BU = BLACK
 - BY = YELLOW
 - GR = GREEN
 - GY = GREY
 - OR = ORANGE
 - PK = PINK
 - RD = RED
 - SL = SILVER
 - TR = THERMISTOR
 - VB = VIOLET
 - WH = WHITE
 - YL = YELLOW
 - BRN = BROWN
 - BLK = BLACK
 - BLU = BLUE
 - GRN = GREEN
 - GY = GREY
 - OR = ORANGE
 - PK = PINK
 - RD = RED
 - SL = SILVER
 - TR = THERMISTOR
 - VB = VIOLET
 - WH = WHITE
 - YL = YELLOW

NAME	MODEL	GROSS CAPACITY	STORAGE CAPACITY	REFRIGERANT TYPE (GALLON/CHILDRN)
LT14P20A	WTM1172 R	40L	40L	R600a

W11175079



REDMI NOTE 8 PRO
AI QUAD CAMERA

Private Picture Copyright : WWW.MBSM.PRO

E	E1130DZ	CSIR	220/60	390	1.35	F	NE	NE6213CK	CSF
	EU1121DZ	RSCR	220/60	325	1.52	F		NE6213BK	CSF
S	SK35XZ	RSIR	127/60	88	1.38	S	CT6217CK	CSF	
L	LU65XZ	RSIR	127/60	190	1.52	S	CT6220CK	CSF	
E	EU1121XZ	CSIR	127/60	250	1.50	F	CJ6228CK	CSF	
R600a L.B.P 宽电压									
S	S66CY	RSIR	160~260/50	108	1.20		CJ6232CK	CSF	
	SG66CY	RSIR	160~260/50	108	1.40		CJ6240CK	CSF	
	SU66CY	RSCR	160~260/50	108	1.60		ES8CU	RSIF	
	SZ66CY	RSCR	160~260/50	108	1.70		ER32CU	RSIF	
L	L88CYA	RSIR	160~260/50	155	1.36	S	LZ58CU	RSCF	
	L111CYA	RSIR	160~260/50	185	1.40	S	R290 H.B.P		
	LK76CYA	RSCR	160~260/50	142	1.50	S	NB	NB5175CU	RSIF
	LK88CYA	RSCR	160~260/50	155	1.50	S	NE	NE5195CU	RSIF

Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_L111CYATélécharger

**mbsm.pro, Refrigeration,
Compressor, GFF57AA, SEBERIA,
Hermetic, Compressor GFF57AA,
LBP, R134a, Disp.5.7cc,
1/5HP, Series, LBP**

written by Lilianne | 8 February 2022



mbsm.pro, Refrigeration, Compressor, GFF57AA, SEBERIA, Hermetic, Compressor GFF57AA, LBP, R134a, Disp.5.7cc, 1/5HP, Series, LBP

ZMC, zanussi, Made in Egypt, Compressors

written by Lilianne | 8 February 2022



Mbsm_dot_pro_private_PDF_catalogo_cubigel_R134aTélécharger



Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

written by Lilianne | 8 February 2022



Mbsm_dot_pro_private_PDF_QA66C14GAX5Télécharger
Mbsm_dot_pro_private_PDF_QA66C14GAX5-Télécharger

ZMC, zanussi, Made in Egypt, Compressor, Frost Free Freezer, GM90AZ, EGM90AZ, 155W, 1/5Hp, 134A, 150G, Electrostar Freezer, 260L CRoss, 235L Storage, 220v-50H, 1.2A, Class T

written by Lilianne | 8 February 2022

COMPRESSOR TECHNICAL DATA

General Data

Refrigerant:	R134a
Application:	LBP
Evaporating Temperature Range:	-30°C to -10°C
Voltage/Frequency:	220/240V/50 HZ
Compressor Cooling:	Static
Expansion Device:	Capillary Tube
Packaging Quantity:	Multi – 96:120 pcs
Approvals:	CE-VDE-GOST

Mechanical Data

Oil Charge:	300 cm ³
Oil Type Configuration:	ester
Oil Type Viscosity:	19 cSt
Weight:	10 kg

Electrical Data

Motor Type:	RSIR / RSCR*
Voltage working range at 50 Hz:	187-264V
Maximum Motor Temperature:	130°C
Locked Rotor Current:	14.46 / 9.86 A
Start Winding Resistance:	23.40Ω at 25°C
Run Winding Resistance:	8.08 Ω at 25°C
Phase:	1 ph

External Characteristics

Internal Diameter	(mm)
Suction Connector	6.5
Discharge Connector	4.9
Process Connector	6.5
Material	Copper

Electrical Components

Starting Device:	PTC 14Ω
Motor Protection:	T0490/xx



Mbsm_dot_pro_private_PDF_EGM90AZTélécharger

JIAXIPERA, Compresseur, réfrigérateur, INDESIT, COMPRESSEUR INDESIT, N1112Y, 140W, 1/5HP, R600, REFRIGERATEUR INDESIT RA 27 IX, RA 27, 230 L, Dimensions: 55x140x60

written by Lilianne | 8 February 2022





Présentation du réfrigérateur INDESIT RA 27 IX (FR)

À retenir du réfrigérateur INDESIT RA 27 IX (FR)

- Réfrigérateur / Congélateur 2 portes (armoire) en pose libre
- Circulation du froid : à air statique
- Volume net total : 227 L (Réfrigérateur : 184 L / Congélateur : 43 L)
- Classe énergie : **A**

Introduction du réfrigérateur INDESIT RA 27 IX (FR)

Désignation :

INDESIT RA 27 IX (FR) (RA27IX)

Voir les réfrigérateurs INDESIT

Date de sortie (approx.) :

Courant 2006

Informations générales du réfrigérateur

INDESIT RA 27 IX (FR)

Type :

Réfrigérateur avec congélateur / 2 portes (congélateur en haut)

Forme :

Armoire (hauteur supérieure à 85 cm)

Pose :

Libre (l'appareil peut être disposé n'importe où*).

Évacuation de la chaleur par l'arrière et le haut.

* Note : Il faudra tout de même respecter des petites distances de sécurité avec les meubles, les murs et la partie haute pour que l'air chaud s'évacue correctement.

Volume net total :

227 L

Circulation de l'air :

Pour le réfrigérateur :

- Méthode par **Air Statique** (circulation naturelle, humidité constante)
- Dégivrage **automatique** (pas d'intervention nécessaire de votre part)

Pour le congélateur :

- Méthode par **Air Statique** (circulation naturelle, humidité constante)
- Dégivrage manuel

Circuit de froid :

Système présent :

- Méthode par **Compression** (compresseur mécanique à l'origine de la création du froid et du bruit)
- L'appareil utilise un seul circuit de création de froid avec un compresseur et un évaporateur

Informations spécifiques sur la zone

principale du réfrigérateur INDESIT RA 27 IX (FR)

Volume réfrigérateur :

184 L

Refroidissement :

Système général **statique**, avec dégivrage automatique.

A propos des clayettes :

3 clayettes* fournies dans le réfrigérateur :

- Une ou plusieurs sont déplaçables et/ou retirables
- Toutes sont en verre

* Note : la séparation entre la zone fraîcheur et le frigo est parfois considérée comme une clayette, parfois non.

A propos des balconnets :

4 balconnets présents :

- Finition "Blancs"
- Ils sont déplaçables
- Tous occupent toute la largeur

Complément d'informations :

Un balconnet porte-bouteilles

Informations spécifiques sur la zone fraîcheur du réfrigérateur INDESIT RA 27 IX (FR)

A propos des bacs fraîcheurs :

1 bac présent

Taille : large

Type de bac : 1 bac avec zone humide pour les fruits et légumes

Informations spécifiques sur la partie congélateur du réfrigérateur INDESIT RA

27 IX (FR)

Volume net congélateur :

43 L

Congélateur / Étoiles :

4 étoiles (froid inférieur à -18 °C)

Pouvoir de congélation :

2.5 kg / 24h

Refroidissement congélateur :

Système général **statique** (dégivrage manuel)

A propos des clayettes :

1 clayette présente

Autres informations congélateur :

Clayette fil

Un compartiment de congélation

Informations sur les équipements du réfrigérateur INDESIT RA 27 IX (FR)

Portes/Tiroirs :

2 portes et réversibles

Charnières à droite

Poignées intégrées

Panneau de contrôles :

Contrôle de la zone 'Réfrigérateur' à l'intérieur (thermostat)

Thermostat réglable

Autres équipements :

Pieds réglables

Indicateur de température partie réfrigérateur

Consommations et performances énergétiques du réfrigérateur INDESIT RA 27 IX (FR)

Coût annuel :

44.4 € (approximatif)

Classe énergie :

A

Consommation électrique :

- Sur 24h :
0,77 kWh / 24h
- Annuelle :
281 kWh / an

Classes climatiques :

N-ST (de 16°C à 38°C)

Autonomie en cas de panne :

14 heures

Informations électriques :

220-240 V

Couleurs et Design du réfrigérateur INDESIT RA 27 IX (FR)

Couleurs :

Inox

Dimensions et poids du réfrigérateur INDESIT RA 27 IX (FR)

Dimensions déballé :

1390 x 550 x 600 mm (HxLxP)

Poids déballé :

47 kg

Dimensions emballé :

1425 x 600 x 645 mm (HxLxP)

Poids emballé :

48.9 kg

Informations diverses du réfrigérateur INDESIT RA 27 IX (FR)

Accessoires fournis :

Un casier à œufs

Un bac à glaçons classique

Cordon électrique et prise

Référence (EAN et/ou UPC) :

40192 (3007842401924)

Autres Dénominations :

Indesit RA27IXFR, Indesit RA 27IXFR, Indesit RA27 IXFR,
Indesit RA27IX FR, Indesit RA 27 IXFR, Indesit RA 27IX FR,
Indesit RA27 IX FR



**GMCC, PE50h1f-9, Compressor,
RSCR, 220V-240V-50hz, R134A,
LBP, 153W, 1/5HP**

written by Lilianne | 8 February 2022



Mbsm_dot_pro_private_PDF_pe50h1f-9Télécharger

Mbsm_dot_pro_private_PDF_pe50h1f-9-2Télécharger

Mbsm_dot_pro_private_PDF_pe50h1f-9-3Télécharger

**1/5HP, Refrigerator, Samsung,
Compressor, R134A, 220-240V,
SD162Q-L1UA, PTC-RSCR, 6.16CC**

written by Lilianne | 8 February 2022



Model No.: SD162Q-L1UA

Test condition: ASHARE

Evaporating Temperature: -23.3° C

Condensing Temperature: 54.4° C

Displacement: 6.16CC/ Rev

Oil: 180CC

Motor type: PTC-RSCR

Nominal voltage range: 187V~276V at 50Hz

Characteristics:

1. Strong load capacity
2. High efficiency & reliability
3. Reliable starting performance
4. Low noise

v id="StyleTableProd">

Mbsm_dot_pro_private_PDF_qdoc.tips_catalogo-compresores-samsungpdfTélécharger

