

**QD43 , 1/6 Hp , 220V 50/60HZ ,  
R12 , RRIR**

written by Lilianne | 21 May 2020

QD43 , 1/6 Hp , 220V 50/60HZ , R12 , RRIR

---

**JX51LCS5-K , Compresseur,  
hermétique Daewoo , 5.12 cc ,  
R12 , 220-240V 60Hz , RSIR ,  
1/6 Hp , 1Phase , L B P ,  
134w**

written by Lilianne | 21 May 2020

JX51LCS5-K , Compresseur, hermétique Daewoo , 5.12 cc , R12 ,  
220-240V 60Hz , RSIR , 1/6 Hp , 1Phase , L B P , 134w

---

**Mini Frigidaire , compresseur  
Americold RG209-12 , 1/4 Hp ,  
0.95 FLA & 9.5 LRA , 210 w**

**, 220-240V , 50-60HZ , R134a**

written by Lilianne | 21 May 2020

Mini Frigidaire , compresseur Americold RG209-12 , 1/6 Hp ,  
0.95 FLA & 9.5 LRA , 220-240V , 50-60HZ , R134a

---

**HUAYI , COMPRESSOR , HYE55YL63  
, 1/6 Hp , 129Kcal , R134a ,  
220V , LBP**

written by Lilianne | 21 May 2020

HUAYI , COMPRESSOR , HYE55YL63 , 1/6 Hp , 129Kcal , R134a , 220V  
, LBP

---

**Tropical Compressor , TLS5FT  
102G4524 , SECOP , R134a ,  
1/6 HP , 134 W , LBP , 220/  
240 V 50Hz**

written by Lilianne | 21 May 2020

Tropical Compressor , TLS5FT 102G4524 , SECOP , R134a , 1/6 HP  
, 134 W , LBP , 220/ 240 V 50Hz

# Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

written by Jamila | 21 May 2020

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp  
,159 w

	<b>Motore</b>	<b>cm<sup>3</sup></b>	<b>Volt</b>	<b>Watt -10°C</b>	<b>Watt -30°C</b>	
RIB5150	A9EV – R22 – 3/8 – LBP	CSR	9,29	220	642	
RIB5160	A11EV – R22 – 1/2 Hp – LBP	CSR	11,11	220	781	
RIB5350	A13EV – R22 – 5/8 Hp – LBP	CSR	13,35	220	967	
RIB5450	N17EV – R22 – 3/4 Hp – LBP	CSR	17,52	220	1221	
RIB5550	N21EV – R22 -1- Hp LBP	CSR	20,68	220	1464	
RIB5650	N23EV – R22 – 1,2 Hp – LBP	CSR	23,18	230	1616	
RIB7104	NB4 COMPRESS. R12 24V. FRAMEC 1/8 =					
RIB7108	NB8 COMPRESS. R12 24V.FRAMEC 175W.=					
RIB7113	NB13HP COMPRESS.R12 24V.FRAMEC 1/3=					

RIBB010	ETR 3 – R134A – 1/12 Hp – LBP	RSIR	3,00	220	127	
RIBB020	ETR 3,5 HP 1/10 R134A – LBP	RSIR	3,50	220	156	
RIBB030	ETR 4 HP 1/8 R134A – LBP	RSIR	4,10	220	179	
RIBB040	ETR 5 – R134a – HP 1/6 – LBP	RSIR	5,12	220	231	
RIBB050	ETR5,5 – R134a – 1/6 Hp – LBP	RSIR	5,55	220	257	
RIBB080	ESC5 – R134a – 1/6 Hp – LBP	RSIR	5,12	220	222	
RIBB100	ESC7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB110	ESC8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB130	ESC9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB140	ESC11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBB200	ESC4H – R134a – 1/8 Hp – LBP	RSIR	4,10	220	177	
RIBB400	ESR 7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB410	ESR 8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB430	ESR 9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB440	ESR11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBE040	TN17EV – R404 – 3/4 Hp – LBP	CSR	17,52	220		565

RIBE050	TN21EV – R404 – 1 Hp – LBP	CSR	20,68	220		644
RIBE060	TN23EV – R404 – 1,2 Hp – LBP	CSR	23,18	220		726
RIBT999	COMPRESSORE ELECTROLUX DESCR.BOLLA					




Verdichter Type neue Type	Verdichter Type	Kälte- mittel	Bereich	1)Betrieb	2)Leistungs- aufnahme Watt	3)Strom- aufnahme A	Öl- füllung cm <sup>3</sup>	Bestell-Nr.
<b>mit Esterölfüllung</b>								
*ETR 3	-	R 134 a	LBP	K	68	0,55	185	*230.051
*ETR 3,5	-	R 134 a	LBP	K	81	0,58	185	*230.053
*ETR 4	-	R 134 a	LBP	K	89	0,64	185	*230.055
*ETR 5	-	R 134 a	LBP	K	109	0,76	185	*230.057
*ETR 5,5	-	R 134 a	LBP	K	118	0,80	185	*230.059
*ESR 7	ESC 7	R 134 a	LBP	K	127	0,83	220	*230.073
*ESR 8	ESC 8	R 134 a	LBP	K	149	1,00	220	*230.075
*ESR 8,5	ESC 8,5	R 134 a	LBP	K	159	1,07	220	*230.077
*ESR 9	ESC 9	R 134 a	LBP	K	177	1,20	220	*230.079
*ESR 11	ESC 11	R 134 a	LBP	K	215	1,42	220	*230.081
ETR 4H	ES(C)R4H	R 134 a	HBP	K	187	1,13	185	-
ETR 5H	ES(C)R5H	R 134 a	HBP	K	231	1,30	185	-
ESR 7H	ESC 7H	R 134 a	HBP	K	208	1,61	220	-
ESR 9H	ESC 9H	R 134 a	HBP	K	396	2,31	220	-
ESR 11H	ESC 11H	R 134 a	HBP	K	472	2,64	220	-
TA 13 EV	-	R 404 A	LBP	K/E	463	2,15	950	230.095
TN 17 EV	-	R 404 A	LBP	K/E	627	2,83	950	230.097
TN 21 EV	-	R 404 A	LBP	K/E	727	3,61	950	230.099

Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

**Mbsm.pro, QA57C12GAX5 , 1PH ,  
1/6 HP ,Panasonic ,Matsushita  
Electric, Company, Malaysia ,  
R134a , 220/240V 50Hz**

written by Jamila | 21 May 2020

Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita  
Electric, Company, Malaysia , R134a , 220/240V 50Hz

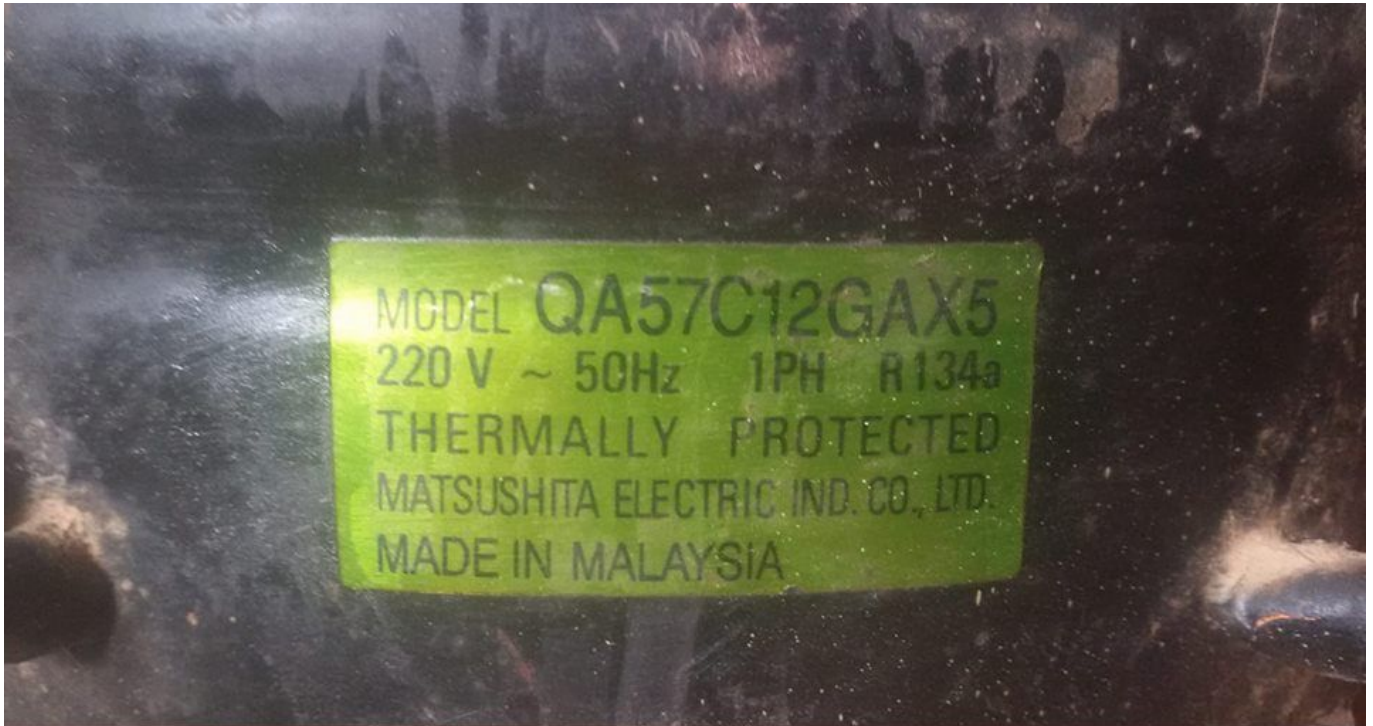

Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

---

**MBSM.PRO , Compressor,  
Electrolux-Zem GL60AA R134A  
,1/6 HP , 1PH , 220-240 V 50  
Hz**

written by Jamila | 21 May 2020

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP ,  
1PH , 220-240 V 50 Hz





PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm<sup>3</sup>
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d'utilisation max. 32°C
- Avec boîtier et système de démarrage

La photo montre l'aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z





PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm\_dot\_pro\_private\_PDF\_GL60AATélécharger  
Mbsm\_dot\_pro\_private\_PDF\_-GL60AATélécharger

590689

GL60AA 99H27NA

**GL60AA**

08283

03254

267799

THERMALLY 220 - 240 V~ 50 Hz PH1  
PROTECTED

**R134a**



CE H



**Type: Hermetic piston compressors****Producer: ACC****Series: HMBP**

**Model: GL60AA**

### **General data**

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

### **Compressor's data**

Cylinder capacity [cm <sup>3</sup> ]:	6
Displacement [m <sup>3</sup> /h]:	1
Weight [kg]:	9,1
Oil charge [cm <sup>3</sup> ]:	265
Oil type:	ISO VG 19 ESTER

### **Engine's data**

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	9,9
Running winding resistance (25°C) [Ω]:	15,6
Starting winding resistance (25°C) [Ω]:	21,31

### **Electrical data**

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

### **Connections**

	milimeters	inches	
Suction tube:	6,5		
Service tube:	6,5		
Discharge tube:	4,9		