




Mbsm.pro, SFW13C/IW, Air conditioner, Fresh, 12500 btu/h, Cooling, heating, 3664 w, r22, t1 ,1.5 hp, 1 Ton

written by Lilianne | 17 April 2022

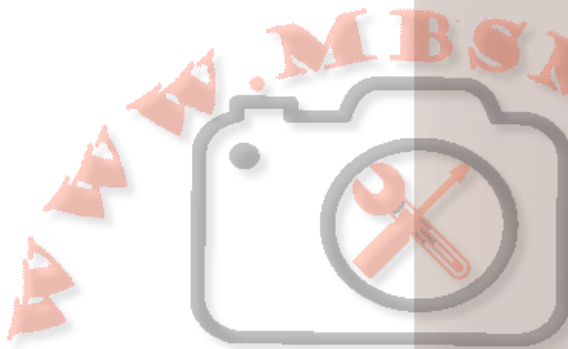

FRESH		
Model / الموديل	SFW13C/IW	
Cooling Capacity / سعة التبريد	12500Btu/h 3664 W	
Heating Capacity / سعة التدفئة	
Refrigerant / فريون	R22	
Max Operating Pressure for the Discharge / suction Side	2.5Mpa 0.6Mpa	
Weight / وزن الوحدة	10Kg	
Rated Voltage / الجهد المقنن	220-240V~	
Rated Frequency / التردد	50Hz	
Rated Current / التيار المقنن	Cooling	8 A
	Heating
Rated Input / القدرة الكهربائية	Cooling	1400W
	Heating
Max current / تيار بدء التشغيل	22 A	
Isolation	I	
Climate Type / مناخ التبريد	T1	
Sound Pressure Level	38dB(A)	
Moisture Protection	IP24	
SPLIT AIR CONDITIONER INDOOR UNIT		
		
0111100111100116000429		
		
63229966203		

FRESH

Mbsm.pro, SFW13C/IW, Air conditioner, Fresh, 12500 btu/h,
Cooling, heating, 3664 w, r22, t1 ,1.5 hp, 1 Ton

**Mbsm.pro, File, pdf,
MSTM-12HR, Midea, 12500
btu/h, r22, 830 g, 220 v, 1
ph, T1, 1 ton, 1.5 HP**

written by Lilianne | 17 April 2022



SPLIT TYPE AIR CONDITIONER			
MODEL	MSTM-12HR		
COOLING CAPACITY	12500Btu/h		
HEATING CAPACITY	13000Btu/h		
REFRIGERANT	R22/830g		
EXCESSIVE OPERATING PRESSURE	DISCHARGE	3.0MPa	
	SUCTION	1.0MPa	
WEIGHT(INDOOR)	8.7kg		
WEIGHT(OUTDOOR)	32.4kg		
POWER SOURCE	220-240V~50Hz, 1Ph		
STANDARD RATING CONDITIONS	COOLING	CURRENT	5.6A
		INPUT	1290W
	HEATING	CURRENT	5.1A
		INPUT	1175W
MAX. CURRENT	10.0A		
MAX. INPUT	2000W		
OUTDOOR UNIT RESISTANCE CLASS	IP 24		
T			
MADE IN CHINA			

CAUTION

1. Ensure to evacuate the air inside the indoor unit and pipes with vacuum pump.
2. Make sure the additional amount of refrigerant to be charged is based on the pipe size and length, please refer to the INSTALLATION INSTRUCTIONS for details.
3. Incorrect installation due to ignoring of the instruction will cause serious problem to the machine.

SN 2413190930172200820041

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, File, pdf, MSTM-12HR, Midea, 12500 btu/h, r22, 830 g, 220 v, 1 ph, T1, 1 ton, 1.5 HP