


**Mbsm.pro, TOSHIBA,  
REFRIGERATOR, FREEZER, GR-  
EFV35, 12 feet, 3 DOOR, 307  
L, compressor, 1/5 hp, 140 w,  
1bp, r134a, 145 g**

written by Lilianne | 9 March 2024

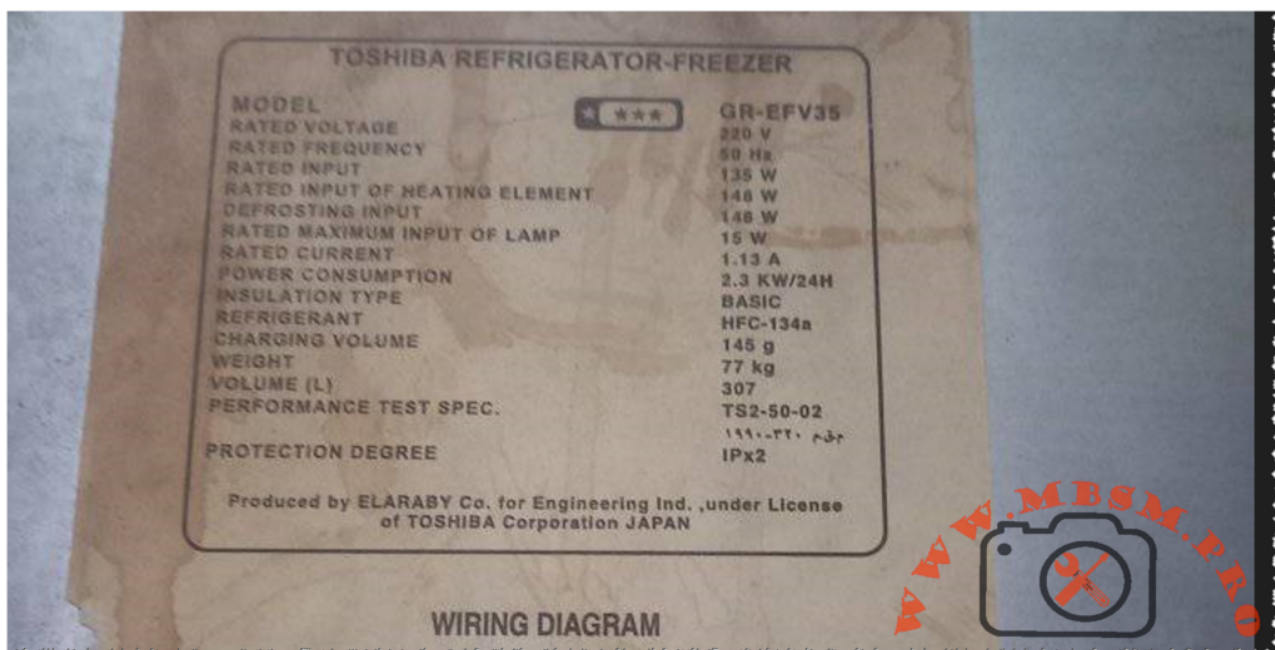

Mbsm.pro, TOSHIBA, REFRIGERATOR, FREEZER, GR-EFV35, 12 feet, 3 DOOR, 307 L, compressor, 1/5 hp, 140 w, 1bp, r134a, 145 g

---

**Deep Freezer, Crown, CR120w,  
120 L, 140 W, 1.1 a, r600a,**

**40 g, 4.23 feet, Compressor ,  
1/6 hp, Lbp, 140 w,**

written by Amina | 9 March 2024




Deep Freezer, Crown, CR120w, 120 L, 140 W, 1.1 a, r600a, 40 g,  
4.23 feet, Compressor , 1/6 hp, Lbp, 140 w,

---

**Mbsm.pro, refrigerator, No  
frost, brf-44wa, 44wa-140,12**

**feet, 340wL, 140 w,  
Compressor, 1/5 hp, r134a,  
140 G, defrost power 155 w**

written by Lilianne | 9 March 2024

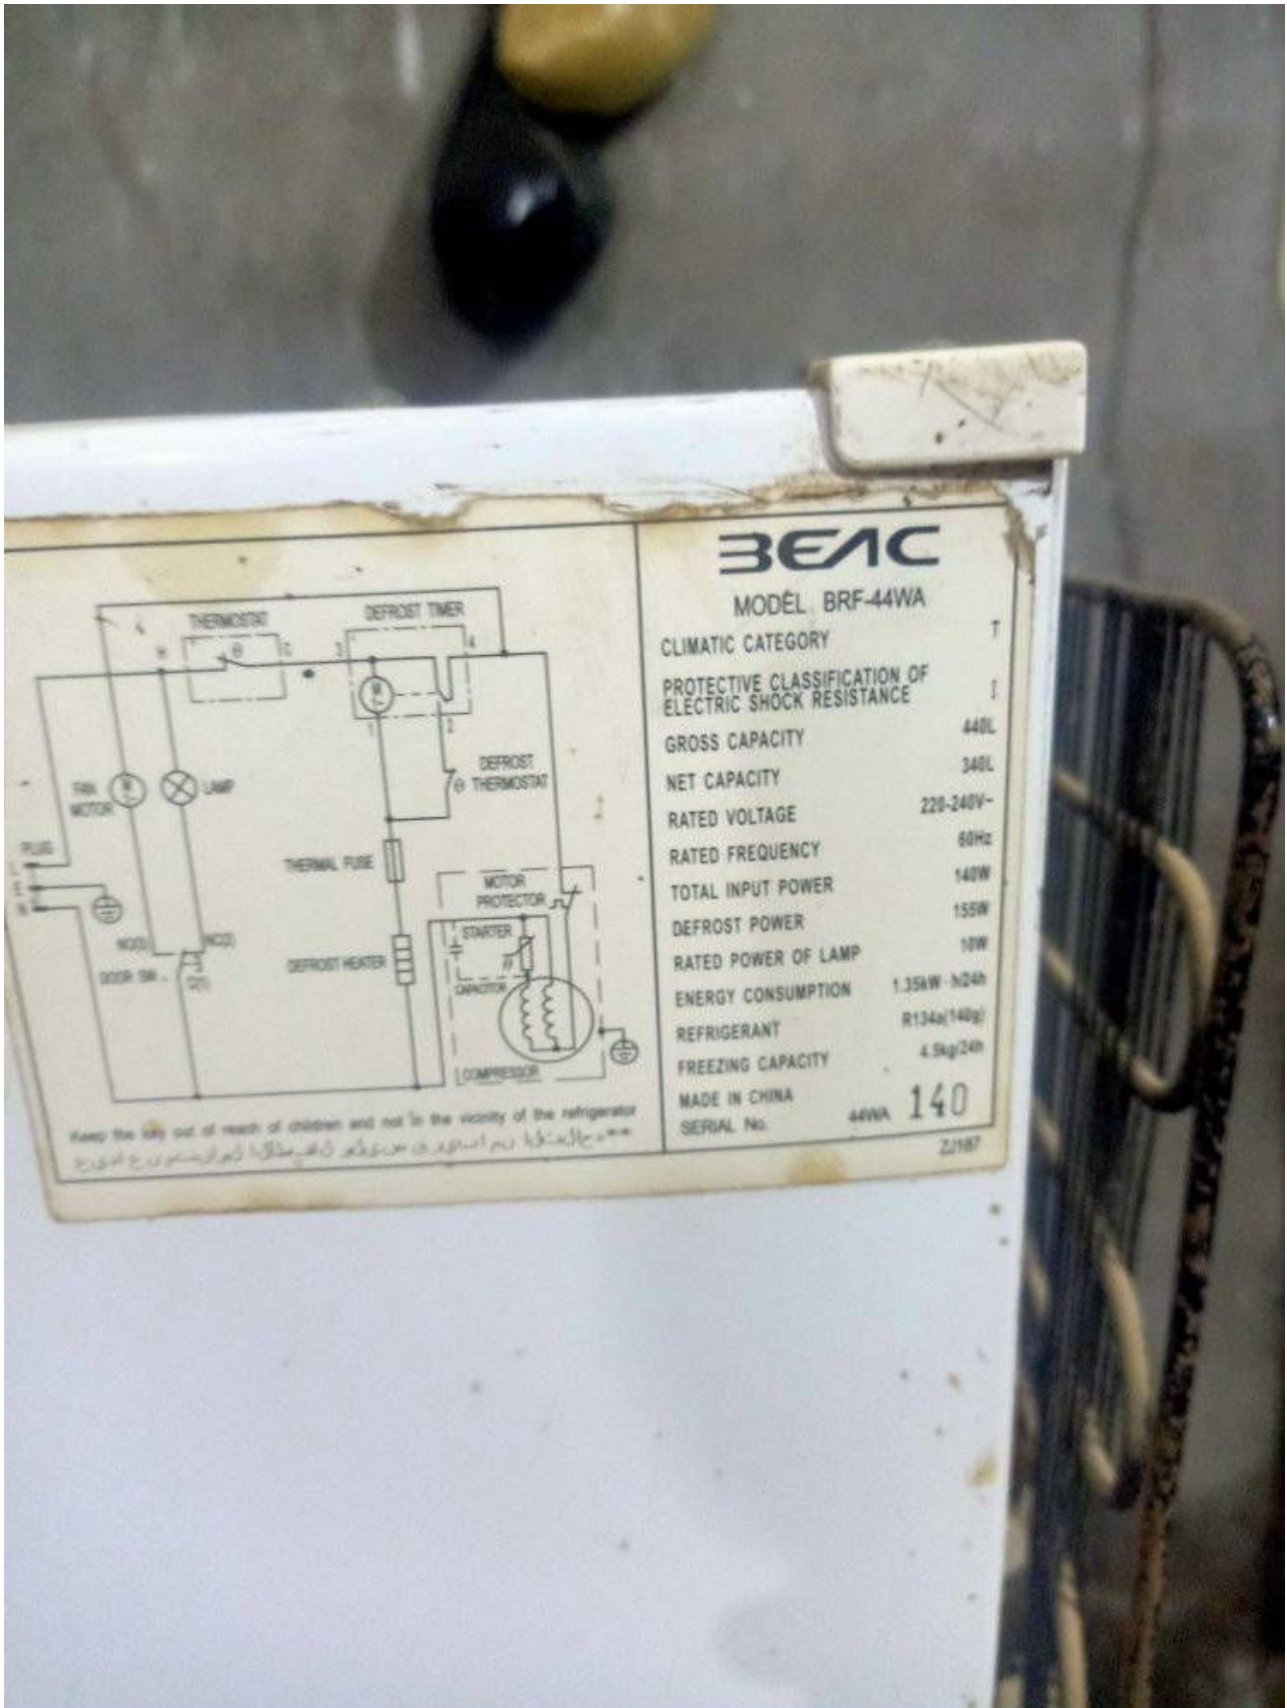

**BEAC**

MODEL BRF-44WA

CLIMATIC CATEGORY	T
PROTECTIVE CLASSIFICATION OF ELECTRIC SHOCK RESISTANCE	I
GROSS CAPACITY	448L
NET CAPACITY	348L
RATED VOLTAGE	220-240V-
RATED FREQUENCY	60Hz
TOTAL INPUT POWER	140W
DEFROST POWER	155W
RATED POWER OF LAMP	10W
ENERGY CONSUMPTION	1.35kW-24h
REFRIGERANT	R134a(140g)
FREEZING CAPACITY	4.9kg/24h
MADE IN CHINA	
SERIAL No.	44WA 140

Keep the key out of reach of children and not in the vicinity of the refrigerator  
 نگه دارید کلید را دور از دسترس کودکان و در نزدیکی یخچال نگذارید

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, refrigerator, No frost, brf-44wa, 44wa-140,12 feet, 340wL, 140 w, Compressor, 1/5 hp, r134a, 140 G, defrost power 155 w

# Sangchai refrigeration, FL series, RL series, CL series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Displacement 7.5 cm cube, 220-240 v 50 hz

written by Lilianne | 9 March 2024

Sangchai refrigeration, FL series, RL series, CL series, Hitachi Compressor, FL1675-sc, 1/5 Hp, R-134A, Low back pressure, 160 w, Displacement 7.5, 220-240 v 50 hz

**Hitachi Hermetic Compressors**

**FL Series**

**STANDARD MODEL**

Application & Refrigerant LBP R134a

Model	Nominal Power		F	Cooling Capacity			D	Cooling			O	Wg	Motor Type	Power Source					Dimension
	HP	W		Hz	W	Kcal/h		BTU/h	cm <sup>3</sup>	N				Oil	Fan	cm <sup>3</sup>	Kg	1	
FL0634	1/12	65	50	78	67	266	3.42				200	6.8		•				•	Type1-165
			60	90	77	307								•	•	•			
FL0739	1/10	75	50	95	82	324	3.94				270	7.8		•				•	Type1-179
			60	108	93	368								•	•	•			
FL0845	1/8	85	50	105	90	358	4.50				270	8.1	RSIR	•				•	Type2-180
			60	118	101	403							RSCR	•	•	•			
FL1052	1/6	100	50	120	103	409	5.19	•			240	8.3	CSIR	•				•	Type1-195
			60	140	120	478							•	•	•				
FL1157	1/6	110	50	135	116	461	5.70				240	8.7		•				•	Type1-195
			60	158	136	539								•	•	•			
FL1262	1/5	125	50	150	129	512	6.23	•			320	9.5		•				•	Type2-200
			60	170	146	580								•	•	•			
FL1675	1/5	160	50	185	159	631	7.47		•	•	300	10.6		•				•	Type3-211
			60	210	181	717								•	•	•			
FL1888	1/4	180	50	215	185	734	8.83		•	•	300	11.1		•				•	Type4-216
			60	250	215	853								•	•	•			







Private Picture Copyright : WWW.MBSM.PRO

### Detail of Label

**F L 14 62 - S B**

**Series name/Refrigerant**  
 F =R134a  
 L =R404A  
 C =R600a

**Application category**  
 L = Low back pressure  
 H = High back pressure

**Nominal power (Out put)**

Sign	Output(W)	Sign	Output(W)
04	45	15	150
05	55	16	160
06	65	17	170
07	75	18	180
08	85	20	200
10	100	25	250
11	110	35	350
12	125	40	400
14	140	45	450

**Nominal voltages / Power source**

Sign	Phase/voltage/frequency	Sign	Phase/voltage/frequency
H	1Ø 100 V 50/60 Hz	S	1Ø 220 - 240 V 50 Hz
P	1Ø 110 V 120 V 60 Hz	D	1Ø 100 V 50/60 Hz
U	1Ø 127 V 60 Hz	T	3Ø 200 V 50/60 Hz
R	1Ø 200 - 220 V 60 Hz		

**Development**  
 A - Z = With oil charge  
 1 - 9 = With out oil charge

**Displacement**

Sign	Displacement(Cm <sup>3</sup> )	Sign	Displacement(Cm <sup>3</sup> )
24	2.4	62	6.2
26	2.6	66	6.6
34	3.4	75	7.5
39	3.9	88	8.8
45	4.5	97	9.7
52	5.2	11	11.0
57	5.7		

www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_Hitachi-catalogueTélécharger  
 Mbsm\_dot\_pro\_private\_PDF\_FL1675Télécharger