

# L111CYA, COMPRESSOR, ASSY, Indesit , Ariston, whirlpool, 1/5hp, 1bp, 180W, r600a

written by Lilianne | 21 December 2021



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

# WARNING


## Electrical Shock Hazard



Disconnect power before servicing.  
 Any ground circuit disconnected during service must be reconnected.  
 Do not reconnect unit to electrical supply until compressor terminal cover is securely in place.  
 If refrigerant leak is suspected around compressor terminal, relieve all pressure from the system, keeping terminal cover in place.  
 Failure to do so can result in death or electrical shock.

FREQUENCY	50 Hz
VOLTAGE RANGE	220-240 VAC
INPUT WATTS	175 W
INPUT CURRENT	1.3 A
COMFORT WATTS	600 W
COOLING CAPACITY	AS PER TABLE
CLIMATE CLASS	T

**Do Not service with R134a**  
 Follow only Approved R600a service procedure & a Qualified technician while repairing.



Risk of fire



### WARNING


Caution: Read all the labels attached to the various parts of the unit when repairing or servicing the refrigerator. Do not attempt to repair or service the unit unless you have read and understood the instructions in the user manual. Do not use any flammable or volatile liquids for cleaning the unit. Do not use any oil or grease on the unit. Do not use any spray paint or other coating on the unit. Do not use any electrical components that are not approved for use in refrigerators. Do not use any electrical components that are not approved for use in refrigerators.

SLIDING AGENT: R600a (CH<sub>2</sub>FCH<sub>2</sub>)  
 C<sub>2</sub>H<sub>2</sub> (CYCLO PENTANE) AS PER TABLE

MFG. BY: WHIRLPOOL OF INDIA LTD.  
 PLOT NO. A-4, M.I.D.C.  
 KANJANGAON, TAL. SHIBPUR,  
 DIST. POHNE - 415 204

"WHIRLPOOL" IS A REGISTERED TRADEMARK OF "WHIRLPOOL CORPORATION USA".

### WIRING DIAGRAM

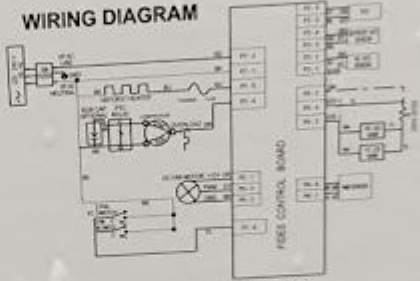

#### SYMBOL CODE

- ⊕ = CONNECTION - SCREW ON
- ⊖ = CONNECTION - CLOSED END
- ⊙ = DISCONNECT TERMINAL
- ⊚ = PERMANENT CONNECTION
- ⊕ = PLUS CONNECTION
- ⊖ = GROUNDING (FOR CHASSIS)

#### WIRE COLOR CODE

- BL = BLUE
- BU = BLACK
- BR = RED
- WH = WHITE
- YL = YELLOW
- GR = GREEN
- PK = PINK
- GY = GREY
- OR = OILY
- BL/WH = REDUCED VOLTAGE
- BL/BR = REDUCED VOLTAGE
- BL/WH = REDUCED VOLTAGE
- BL/BR = REDUCED VOLTAGE

NAME	MODEL	GROSS CAPACITY	STORAGE CAPACITY	REFRIGERANT TYPE (GALLON/LITERS)
L10-0702A	WTM11752 R	400L	400L	R600a

W11175079

REDMI NOTE 8 PRO  
 AI QUAD CAMERA



REDMI NOTE 8 PRO  
AI QUAD CAMERA

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

E	E1130DZ	CSIR	220/60	390	1.35	F	NE	NE6213CK	CSF
	EU1121DZ	RSCR	220/60	325	1.52	F		NE6213BK	CSF
S	SK35XZ	RSIR	127/60	88	1.38	S	CT6217CK	CSF	
L	LU65XZ	RSIR	127/60	190	1.52	S	CT6220CK	CSF	
E	EU1121XZ	CSIR	127/60	250	1.50	F	CJ6228CK	CSF	
R600a L.B.P 宽电压									
S	S66CY	RSIR	160~260/50	108	1.20		CJ6232CK	CSF	
	SG66CY	RSIR	160~260/50	108	1.40		CJ6240CK	CSF	
	SU66CY	RSCR	160~260/50	108	1.60		ES8CU	RSIF	
	SZ66CY	RSCR	160~260/50	108	1.70		ER32CU	RSIF	
L	L88CYA	RSIR	160~260/50	155	1.36	S	LZ58CU	RSCF	
	L111CYA	RSIR	160~260/50	185	1.40	S	R290 H.B.P		
	LK76CYA	RSCR	160~260/50	142	1.50	S	NB	NB5175CU	RSIF
	LK88CYA	RSCR	160~260/50	155	1.50	S	NE	NE5195CU	RSIF

Private Picture Copyright: WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_L111CYATélécharger

**Compressor, ASPERA, b3118b ,  
1/4 hp , 240V~50hZ,  
Frigidaire 2 portes, Philips,  
180W, Class T, 422L (460L  
Total), compressor b3118b,  
220g , R134a**

written by Lilianne | 21 December 2021

Compressor, ASPERA, b3118b , 1/4 hp , 240V~50hZ, Frigidaire 2 portes, Philips, 180W, Class T, 422L (460L Total), compressor b3118b, 220g , R134a



**PHILIPS**

**MADE IN EGYPT**

Service  
Service  
Service

**MODEL ARG 425 / PH**

230 V  
160 W

- 50 Hz

**Class T**

Gross  
Net  
Net  
System  
No

Volume  
Volume  
Storing Volume  
Compressor

460 Ltr  
440 Ltr  
422,5 Ltr  
ccl<sub>2</sub> F<sub>2</sub> 220 g

1095015

#### 4.30 BAJA TEMPERATURA, Monofásicos 220 V 50 Hz

R12  
MP39  
FX56

Modelo	Tipo	CV.	Cm3	Código	Precio €
BP1084A	S	1/8	4,30	10600	-
BP1111A	S	1/8	5,73	10601	139,00
NB1112A	S	1/6	5,9	10602	167,00
NB1116A	S	1/4	8	10603	161,00
B3116B	RH	1/4	8	10604	166,00
NB1118A	S	1/4	8,85	10605	165,00
B3118B	RH	1/4	8,85	10606	172,00
B2118B	S	1/4	8,85	10607	181,00

Modelo	Tipo	CV.	Cm3	Código	Precio €
NE2121A	F	1/3	12,00	10608	210,00
T2124A	F	1/3	12,58	10609	-
T2128A	F	1/3	14,50	10610	-
NE2130A	F	1/3	14,20	10611	236,00
T2134A	F	3/8	17,40	10612	310,00
T2140A	F	3/8	20,40	10613	321,00
J2152A	F	1/2	26,00	10614	439,00
J2170A	F	3/4	34,37	10615	462,00

Ver aplicación de todos los compresores de esta página en el nuevo reglamento Europeo (CE) nº 2037/2000, publicado el 29/09/2000.

#### 4.40 BAJA TEMPERATURA, Monofásicos 220 V 50 Hz

R22  
R417a  
R427a

Modelo	Tipo	CV.	Cm3	Código	Precio €
NE2125E	F	1/3	8,90	10618	199,00
NE2134E	F	3/8	12,00	10619	217,00
T2140E	F	1/2	14,50	10620	339,00
T2155E	F	5/8	17,40	10621	362,00

Modelo	Tipo	CV.	Cm3	Código	Precio €
T2168E	F	3/4	20,40	10622	373,00
NJ2178E	F	3/4	23,50	10623	413,00
J2190E	F	3/4	27,10	10624	429,00







Private Picture Copyright : WWW.MBSM.PRO



Mbsm\_dot\_pro\_private\_PDF\_all-Compresseur-hermetique-pdf1Télécharger

Mbsm\_dot\_pro\_private\_PDF\_all-Compresseur-hermetique-pdf1-1Télécharger