

Mbsm.pro, Compressor, Lg, Lbp,  
MB88NA, 151 w, 1/5 hp, r600a,  
1ph-220v-50hz

Category: compressor

written by Lilianne | 13 April 2025



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compressor, Lg, Lbp, MB88NA, 151 w, 1/5 hp, r600a, 1ph-220v-50hz

Mbsm.pro, Compresoor, 1/8 hp, r12,  
1ph/220v/50hz, AEZ1336A, B8A39,  
AE1027, TL4A, L45AU, PW4.5K9,  
AZ1335A, 8L300, FN43F67S, M4J, B8A10,  
A1075A, V792, V792E, AS8, E36601,  
LK39.0, TL4B, L45AW, AZ1340A,  
FNE75WS5, ESM4, PB9AF88, A1085A,  
E44101A, LK45.0, TL4A, AEZ1336A,  
BP1072A

Category: compressor

written by Lilianne | 13 April 2025



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, Compresoor, 1/8 hp, r12, 1ph/220v/50hz, AEZ1336A, B8A39, AE1027, TL4A,  
L45AU, PW4.5K9, AZ1335A, 8L300, FN43F67S, M4J, B8A10, A1075A, V792, V792E, AS8,  
E36601, LK39.0, TL4B, L45AW, AZ1340A, FNE75WS5, ESM4, PB9AF88, A1085A, E44101A,  
LK45.0, TL4A, AEZ1336A, BP1072A

# Mbsm.pro, Compressor , s36G, 1/10 hp, 1ph 220v/50hz, R134a, 32g, water-cooler, BLY-F/950

Category: compressor

written by Lilianne | 13 April 2025



Private Picture Copyright : WWW.MBSM.PRO

Information	Value
Model	BLY-F (905)
Rated Voltage	220-240V~
Rated Frequency	50/60Hz
Heating Power	450W
Total Power	550W
Maximum Rated Wattage of Lamps	0.5W
Cooling Capacity	1.5L/h
Cooling Consumption	0.100Kwh/H
Rated Cooling Current	0.8A
Refrigerant	R134a/32g
Climate Class	T
Protection Class	I
Foam	EPS
Waterproof Degree	IPX0
Made in	China

## Water Dispenser / Mini Fridge Compressor (1/10HP)

Refrigeration Compressor Type Reciprocating Compressor

Refrigerant R134A

Usage Water Dispenser / Small Fridge / Minibar / etc

Warranty	N/A
Voltage	220-240V / 50Hz
Displacement	3.6 cm <sup>3</sup>
Model No.	S36G / QD36
Cooling Power (W)	80W
Cooling Power (HP)	1/10 HP

Small refrigeration compressor mainly used in:

- Water Dispenser (cooling cabinet models)
- Small Refrigerator / Mini Bar / Ice Machines
- Other small refrigerating equipment

Cooling Power: 85W (1/10 HP)

Electricity required: 220-240V / 50Hz

## 1. Compressor (Model S36G)

- **Purpose:** The core component for pressurizing refrigerant in a cooling cycle.
  - **Model S36G:** Likely a specific compressor model (possibly from a brand like Secop, Danfoss, or a regional manufacturer). Verify with manufacturer documentation for exact specs.
  - **Application:** Small-scale systems (e.g., commercial water coolers, medical devices, or compact refrigeration) due to the small refrigerant charge.
- 

## 2. Refrigerant (R134a, 32g)

- **R134a:** A common hydrofluorocarbon (HFC) refrigerant used in medium-temperature systems (e.g., refrigerators, AC units, water coolers).
  - **32g Charge:** Indicates a small system, typical for portable or compact units. Ensure the charge matches manufacturer specifications to avoid inefficiency or damage.
- 

## 3. Water-Cooler System

- **Water-Cooled Condenser:** Uses water (instead of air) to dissipate heat, improving efficiency. Requires a water supply, pump, and possibly a cooling tower.
  - **Applications:** Often found in commercial settings (e.g., water dispensers, industrial chillers, or high-efficiency HVAC systems).
- 

## 4. BLY-F/950

- Likely a **component model**, such as:
    - **Filter drier:** Removes moisture/contaminants from refrigerant.
    - **Pressure switch:** Safety device to control system pressure.
    - **Control board/Valve:** Part of the system's electrical or flow regulation.
    - Check manufacturer manuals or suppliers for exact function.
-

# Key Considerations

1. **Compatibility:** Ensure the compressor (S36G) is designed for R134a and water-cooled operation.
  2. **Refrigerant Charge:** Confirm 32g is correct (undercharging/overcharging affects performance).
  3. **Water Cooling:** Check for scale buildup, water flow rate, and pump functionality.
  4. **BLY-F/950 Replacement:** Cross-reference with OEM parts or contact the system manufacturer.
- 

## Troubleshooting Tips


- **Low Cooling Efficiency:** Check refrigerant charge, water flow, or condenser cleanliness.
- **Component Failure:** Test the BLY-F/950 part (e.g., continuity for switches, clogging in filter driers).
- **Noise/Leaks:** Inspect the compressor and refrigerant lines.

**Products Introduction:**

Voltage / frequency(V/Hz)	Horsepower (hp)	Model	Displacement (cc/rev)	Motor type	Cooling capacity+/-5% ASHRAE(-23.3°C)			Input Power +/-5% w	COP+/-7% ASHRAE(-23.3°C)			Cooling
					(kcal/h)	(W)	(Btu/h)		(kcal/h)	(W)	(Btu/h)	
					220-240V~ 50/60Hz	1/14hp	ASV20H	2.0cc	RSIR	41	48	
	1/13hp	ASV25H	2.5cc	RSIR	50	58	198.00	68.00	0.73	0.85	2.9	ST
	1/12hp	ASV30H	3.0cc	RSIR	60	70	239.00	82.00	0.73	0.85	2.9	ST
	1/12hp	S30G	3.0cc	RSIR	56	65	222.00	72.00	0.77	0.9	3.07	ST
	1/10hp	S36G	3.6cc	RSIR	69	80	273.00	89.00	0.77	0.9	3.07	ST
	1/8hp	ASW43H	4.3cc	RSIR	106	123	420.00	98.00	1.08	1.25	4.27	ST
	1/6hp	ASW53H	5.3cc	RSIR	120	140	478.00	112.00	1.08	1.25	4.27	ST
	1/5hp	ASW65H	6.5cc	RSIR	143	165	566.00	132.00	1.08	1.25	4.27	ST
	1/4hp	ASW75H	7.5cc	RSIR	168	190	665.00	152.00	1.08	1.25	4.27	ST
	1/4+hp	ASQ91H	9.1cc	RSIR	189	220	751.00	176.00	1.08	1.25	4.27	ST
	1/3hp	ASQ110H	11.0cc	RSIR	241	280	955.00	215.00	1.11	1.3	4.43	ST
	1/3+hp	ASQ128H	12.8cc	RSIR	280	326	1112.00	251.00	1.11	1.3	4.43	ST
115-127V/60Hz	1/14hp	ASV20HD	2.0cc	RSIR	47	55	188.00	65.00	0.73	0.85	2.9	ST
	1/10hp	ASV25HD	2.5cc	RSIR	56	65	222.00	78.00	0.77	0.9	3.07	ST
	1/12hp	ASV30HD	3.0cc	RSIR	69	80	273.00	100.00	0.77	0.9	3.07	ST
	1/8hp	ASW43HD	4.3cc	RSIR	116	135	460.00	108.00	1.08	1.25	4.27	ST
	1/6hp	ASW53HD	5.3cc	RSIR	138	160	546.00	128.00	1.08	1.25	4.27	ST
	1/5hp	ASW65HD	6.5cc	RSIR	167	194	662.00	147.00	1.14	1.32	4.5	ST
	1/4hp	ASW75HD	7.5cc	RSIR	196	228	777.00	173.00	1.14	1.32	4.5	ST
FC:Fancooling	RSIR:ResistanceStartInductionRun				EvaporatingTemp.: -23.3°C(-10°F)			1watt=3.41Btu/Hr				
OC:Oilcooling	RSCR:ResistanceStartCapacitorRun				CondensingTemp.: 54.4°C(130°F)			1watt=0.86Kcal/Hr				
ST:Static	CSIR:CapacitorStartInductionRun				GasSuperheatedto: 32.2°C(90°F)			1Kcal/Hr=3.97Btu/Hr				
	CSR:CapacitorStartCapacitorRun				Liquidsub-cooledto: 32.2°C(90°F)							
					AmbientTemp.: 32.2°C(90°F)							

As a result of a self-policy of constant development, technical specifications may be subject to change.



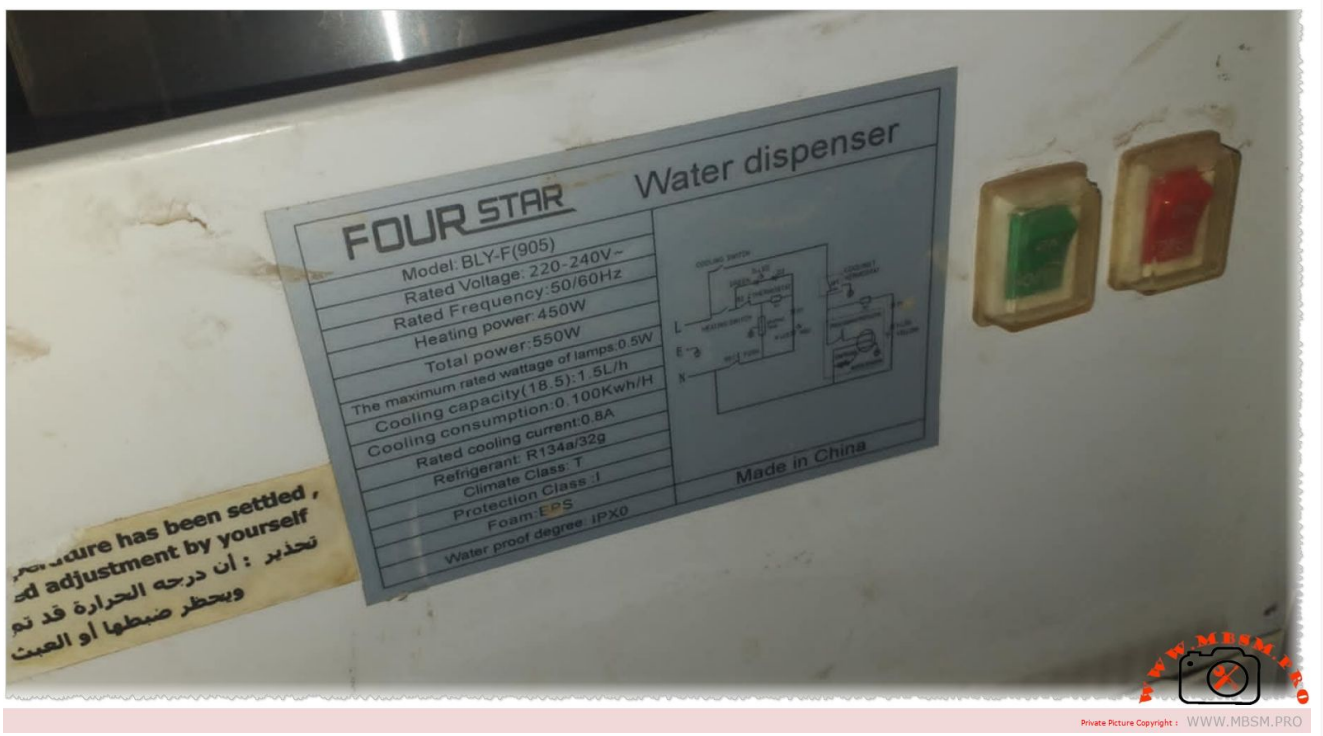

- File uploaded successfully: [Open file in a new window](#)

**File Information:**

File Name: Mbsm-tn-media-\_Compressor-s36G-R134a-32g-water-cooler-BLY-F-950.jpg

File Type: image/jpeg

File Size: 436.6 KB

File Extension: jpg

- File uploaded successfully: [Open file in a new window](#)

**File Information:**

File Name: Mbsm-tn-media-Compressor-s36G-R134a-32g-water-cooler-BLY-F-950.jpg

File Type: image/jpeg

File Size: 435.14 KB

File Extension: jpg



File uploaded successfully: [Open file in a new window](#)

**File Information:**

File Name: Mbsm-tn-media-Compressor-s36G-R134a-32g-water-cooler-BLY-F-950.jpg

File Type: image/jpeg

File Size: 549.08 KB

File Extension: jpg

File uploaded successfully: [Open file in a new window](#)

**File Information:**

File Name: Mbsm-tn-media-Compressor-s36G-R134a-32g-water-cooler-BLY-F-950.pdf

File Type: application/pdf

File Size: 296.7 KB

File Extension: pdf

# Mbsm.pro, Compressor , GMCC, PZ80E1F, PZ80E1D, PZ80E1C, PZ80E1A, PZ80E1Z, PZ80H1Z, PZ80H1Y, 1/5 hp, 150 w, 130kcal, 500 btu, R600a LBP, 1ph/220v/50hz

Category: compressor

written by Lilianne | 13 April 2025

	PZ70E1Z	7.0	ST	RSCR	220V-240V/50Hz	120	103	409	1.78	6.07	-	AI	178
	PZ70E1Y	7.0	ST	RSCR	220V-240V/50Hz	120	103	409	1.83	6.24	-	AI	178
	PZ75E1B	7.5	ST	RSCR	220V-240V/50Hz	135	116	461	1.70	5.80	CCC/VDE	AI	174
	PZ75E1Z	7.5	ST	RSCR	220V-240V/50Hz	140	120	478	1.75	5.97	-	AI	178
	PZ75E1Y	7.5	ST	RSCR	220V-240V/50Hz	137	118	467	1.82	6.21	-	AI	178
H	PZ75H1X	7.5	ST	RSCR	220V-240V/50Hz	137	118	467	1.87	6.38	CCC/VDE	AI	178
	PZ75H1W	7.5	ST	RSCR	220V-240V/50Hz	137	118	467	1.95	6.65	CCC/VDE	AI	178
E	SZ80E1J	8.0	ST	RSIR	220V-240V/50Hz	135	116	461	1.35	4.61	CCC/TUV	AI	159
	SZ80E1H	8.0	ST	RSIR	220V-240V/50Hz	137	118	467	1.43	4.88	CCC/VDE	AI	164
H	SZ80H1H	8.0	ST	RSIR	220V-240V/50Hz	148	127	505	1.45	4.95	-	AI	170
E	PZ80E1F	8.0	ST	RSCR	220V-240V/50Hz	137	118	467	1.53	5.22	CCC/VDE	AI	164
	PZ80E1D	8.0	ST	RSCR	220V-240V/50Hz	142	122	485	1.60	5.46	CCC/VDE	AI	164
	PZ80E1C	8.0	ST	RSCR	220V-240V/50Hz	147	126	502	1.65	5.63	CCC/VDE	AI	169
	PZ80E1A	8.0	ST	RSCR	220V-240V/50Hz	147	126	502	1.73	5.90	CCC/VDE	AI	174
	PZ80E1Z	8.0	ST	RSCR	220V-240V/50Hz	148	127	505	1.78	6.07	-	AI	178
H	PZ80H1Z	8.0	ST	RSCR	220V-240V/50Hz	152	131	519	1.80	6.14	-	AI	178
	PZ80H1Y	8.0	ST	RSCR	220V-240V/50Hz	150	129	512	1.83	6.24	CCC/VDE	AI	170

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Discover the GMCC PZ80E1F compressor, a 1/5 HP refrigeration unit offering 150W cooling capacity, R600a refrigerant, and low back pressure operation. Ideal for

various cooling applications

Mbsm.pro, Lg, compressor, CMA110NJJM,  
rccb, 1ph/220v/50hz, 170 kcal, 676  
bth/, 198 w, 1/4 hp, fixed speed ,  
classique compressor, r600a, lbp

Category: compressor

written by Lilianne | 13 April 2025



Private Picture Copyright : WWW.MBSM.PRO

The LG CMA110NJJM compressor is a classic model that operates on a single phase with a voltage of 220V and a frequency of 50Hz. It boasts a fixed speed and is powered by a 1/4 HP motor. This compressor is perfect for applications requiring a steady and reliable performance.