Compressor, NL7.3FT, SECOP, 105G6726, DANFOSS, 6726, 105G, 105 G 6726, 105G 6726, 1/5 HP, 180W, LBP, Zanussi, Kiriazi Electric Company, TGV 335L, NO FROST, TSV 320L, FC 83L , R134A, 125G, 220-240V 50Hz, CSIR

written by Lilianne | 16 February 2021 R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.


Type de gaz	App	НР	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	
R134A	LBP	1/5	156	NL6FT.2	
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	+ 1/4	219	NL9FT.2 (CSIR)	NL
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	+ 4	213	NLY7F	
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	+ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	+ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / HBP	1/3	264	SC12G	
R134A	LBP / MBP / HBP	1/2	392	SC18G	SC
R134A	LBP / MBP / HBP	3/4	456	SC21G	
R134A	MBP	3/4	1073	SC21MFX	
R134A	LBP	3/4	567	SC21FTX	
R404A	LBP	1	1033	ST21CL	
R404A	LBP	1	986	SC18CLX.2	
R404A	MBP	1/2	359/650	SC15MLX	
R404A	MBP	7/8	762/1584	SC18MLX	

## ELECTRIC \*\*\*\* COMPANY No Frost Refrigerator Class Product 1.1/-Current / Amp. E 335N/3 Model 125g Refrigerant R 134a 220-240V/50HZ Rated Voltage 335 L Total Gross Volume 1 x 25 w Rated input of lamp Total Storge Volume 320 L IPX4 Type II Ins : Basic 83L Freezer Capacity 4 kg/24hr Freezing Capacity Tow Door Ref. 6000 / 2008 ES 3793 / 2006 Made in Egypt Serial Number





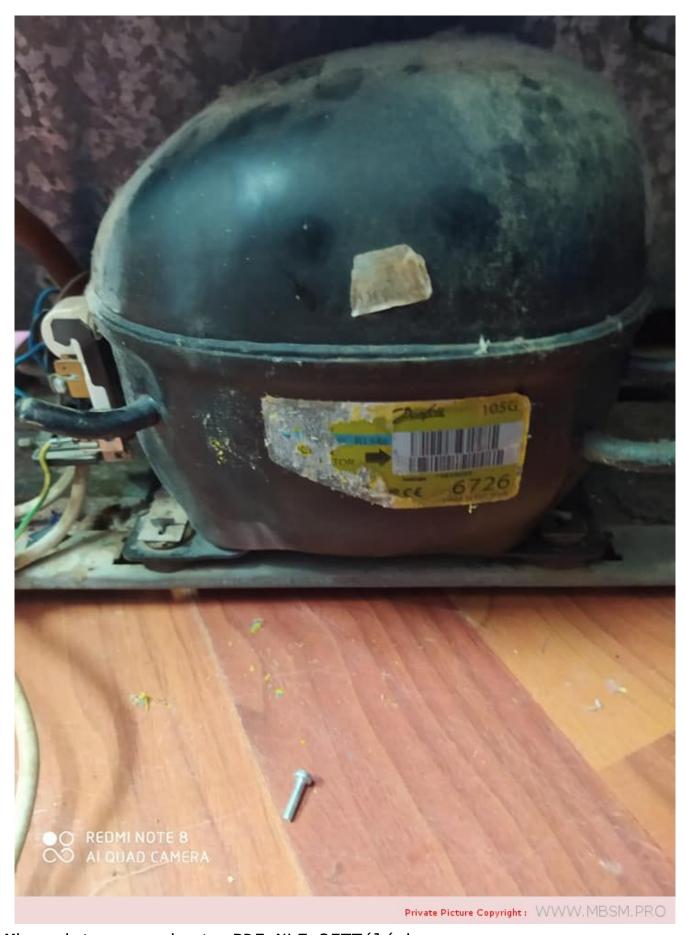

Mbsm\_dot\_pro\_private\_PDF\_NL7.3FTTélécharger Mbsm\_dot\_pro\_private\_PDF\_nl73ft\_105g6731\_r134a\_220v\_50hz\_11-20 11\_desd406c102Télécharger



