

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

written by Lilianne | 12 October 2018

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power
3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

- ASPERA

SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO



embraco NT




R134a

HBP

PictureS Mbsm Dot Pro : www.mbsm.pro

EM/NE/NT/NJ

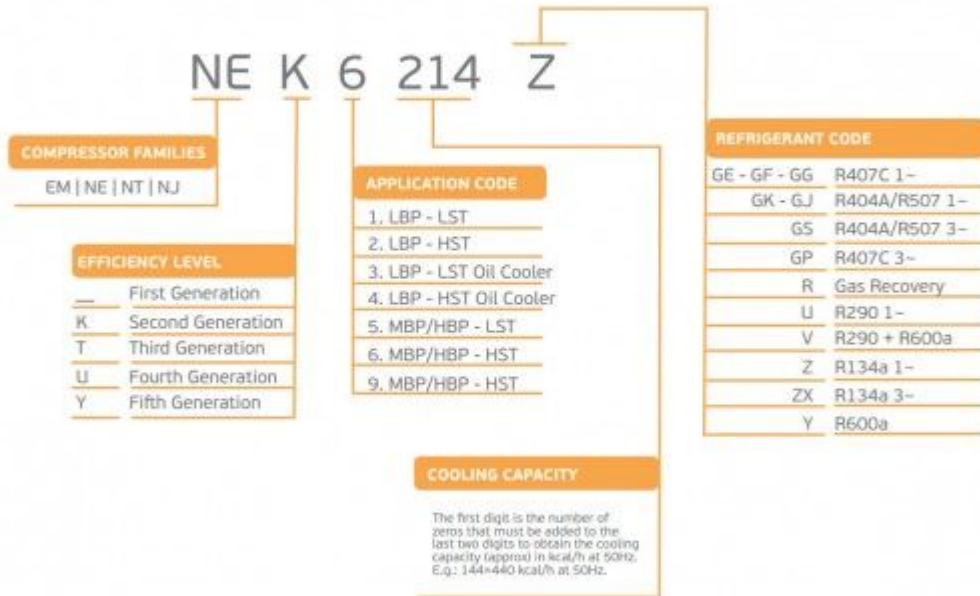

50Hz 50-60Hz	R134a							
	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : www.mbsm.pro

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP , 1PH , 220-240 V 50 Hz

written by Jamila | 12 October 2018

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP ,
1PH , 220-240 V 50 Hz



PictureS Mbsm Dot Pro : www.mbsm.pro

- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm³
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d'utilisation max. 32°C
- Avec boîtier et système de démarrage

La photo montre l'aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z



ZEM

R 134a



GL

CE



BEAB
Approved

220-240V 3 25

MA
R

017



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm_dot_pro_private_PDF_GL60AATélécharger
Mbsm_dot_pro_private_PDF_-GL60AATélécharger

590689

GL60AA 99H27NA

GL60AA

08283

03254

267799

THERMALLY 220 - 240 V~ 50 Hz PH1
PROTECTED

R134a



CE H



Type: Hermetic piston compressors**Producer: ACC****Series: HMBP**

Model: GL60AA

General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

Compressor's data

Cylinder capacity [cm ³]:	6
Displacement [m ³ /h]:	1
Weight [kg]:	9,1
Oil charge [cm ³]:	265
Oil type:	ISO VG 19 ESTER

Engine's data

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	9,9
Running winding resistance (25°C) [Ω]:	15,6
Starting winding resistance (25°C) [Ω]:	21,31

Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

Connections

	milimeters	inches	
Suction tube:	6,5		
Service tube:	6,5		
Discharge tube:	4,9		