

Mbsm.pro, Compressor, Embraco, Aspera, NJ9226GK, MBP, R404A, R507, 230V/1/50Hz, 1 HP++, 1.5 hp++, 1.75 hp

written by mahdi miled | 22 December 2022



Mbsm.pro, Compressor, Embraco, Aspera, NJ9226GK, MBP, R404A,
R507, 230V/1/50Hz, 1 HP++,

**Mbsm.pro, COMPRESSOR,
HYK95AA, 240V, 1/5HP, 167W,
R600, ARISTON, FREEZER**

written by Jamila | 22 December 2022

Mbsm.pro, COMPRESSOR, HYK95AA, 240V, 1/5HP, 167W, R600,
ARISTON, FREEZER

**Mbsm.pro, Compressor,
n1110dy, 1/5 Hp, 123 W,
R134a, Freezer, Refrigerator,
Tecumseh**

written by Jamila | 22 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, n1110dy, 1/5 Hp, 123 W, R134a, Freezer, Refrigerator, Tecumseh

**Mbsm.pro, Compressor,
AK100CY1, R600a, 1/8 hp, mini
Refrigeration Compressor,
Donper compressor**


written by Jamila | 22 December 2022



Mbsm.pro, Compressor, AK100CY1, R600a, 1/8 hp, mini
Refrigeration Compressor, Danfoss compressor

**Mbsm.pro, Compressor, Danfoss,
LJ88DY1, R600a, Lbp, 1/5 hp,
185 w, 8.8 cm³**

written by Jamila | 22 December 2022

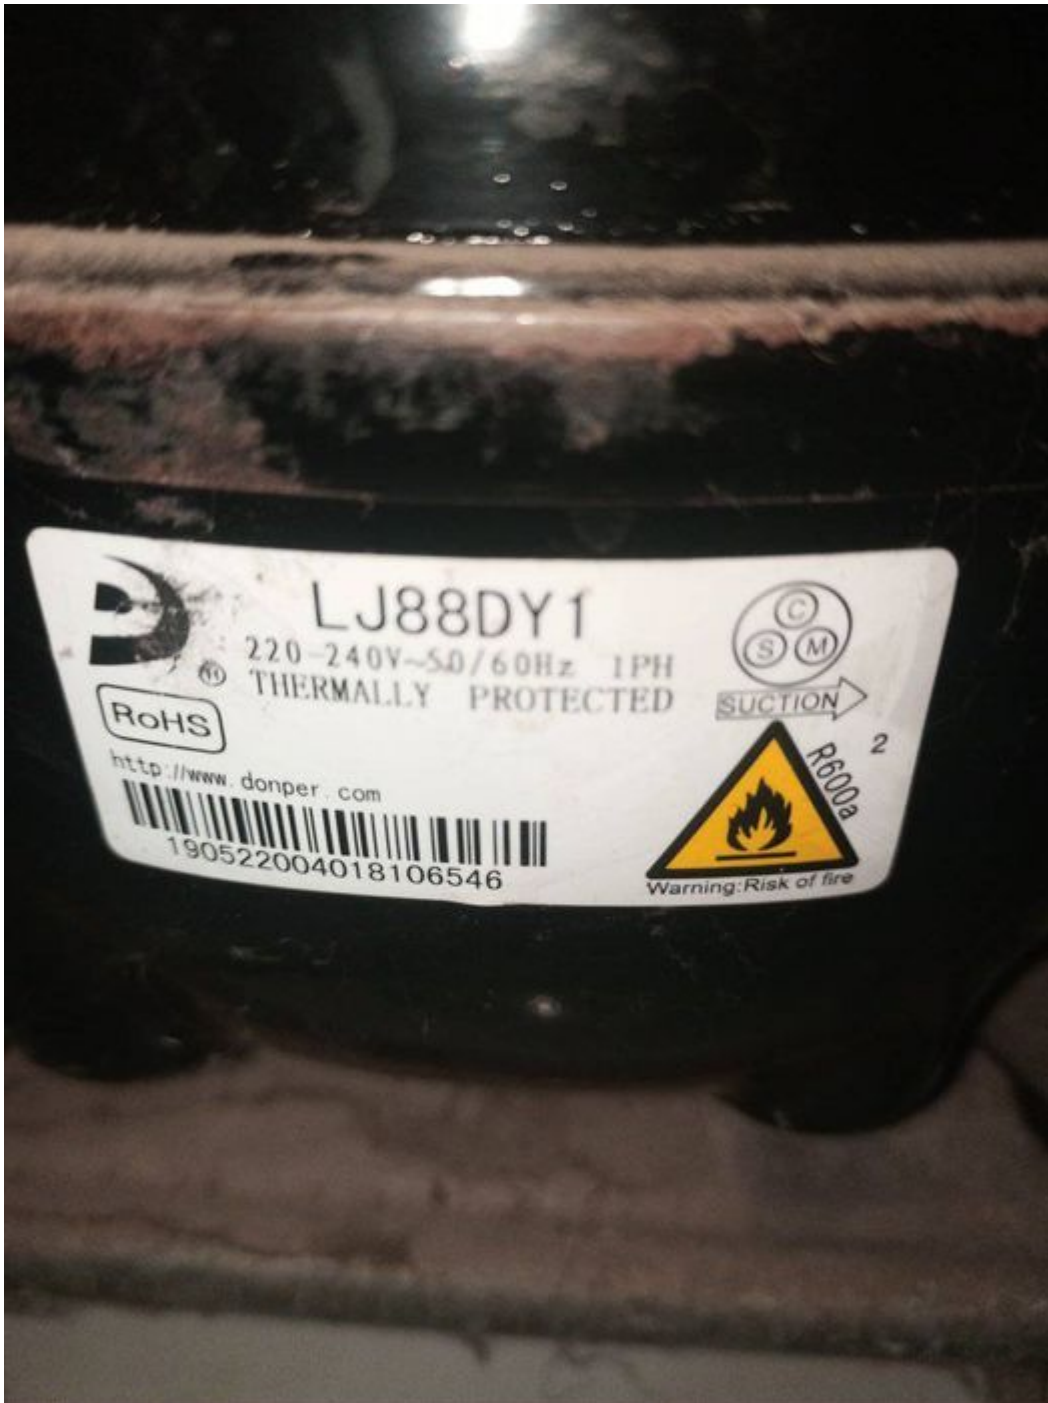

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Domper, LJ88DY1, R600a, Lbp, 1/5 hp, 185 w, 8.8 cm³

Mbsm.pro, compressor, Panasonic, 1/3 hp, Lbp, E Series, R134a, ETI57C13DCH, ENI68C13DCH, Reciprocating, Compressors, Variable Speed, inverter, BLCD, from 63 to 240 w, 240v+-, from 60 to 268 hz, from 25 rps to 72 rps

written by Jamila | 22 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Panasonic, Lbp, E Series, R134a,

ETI57C13DCH, ENI68C13DCH, Reciprocating, Compressors, Variable Speed, inverter, from 63 to 240 w, 240v+-, from 60 to 268 hz, from 25 rps to 72 rps

Mbsm.pro, Compressor, GL60AA, GL60AB, GL50AA, GL50AB, AZ107Y, AZ90, YGVM44AA, GLY45AA, GLY45AA, TLS5F, 1/6 hp, 1bp

written by Jamila | 22 December 2022



Mbsm.pro, Compressor, GL60AA, GL60AB, GL50AA, GL50AB, AZ107Y, AZ90Y, GVM44AA, GLY45AA, 1/6 hp, 1bp

**Mbsm.pro, Compressor,
Eateron, E100HL, R-134,
23.3C, 280W, HUAYI, LBP**

written by Jamila | 22 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Eaton, E100HL, R-134, 23.3C, 280W, HUAYI, LBP

**Mbsm.pro, compressor, Highly,
hitachi, rotary, SHX33 , 2
hp, 17750 btu, R22**

written by Jamila | 22 December 2022




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Highly, hitachi, rotary, SHX33 , 2 hp, 17750 btu, R22

Mbsm.pro, Danfoss, Reciprocating, compressor, NLX11KK.2, 105H6971, NLX11KK.2 105H6971, 1/4 hp++, 1/3 hp-, r600a

written by mahdi miled | 22 December 2022



			-35	-30	-20	-15	-10	-5	0	5	[W]	[W/W]	[W/W]	[W]	[kcal/h]	[W/W]	[kcal/Wh]	
Energy-optimized	1.	PLE35K	101H0360			38	52	68	87	109		27		0.68	38	33		
		TLES4KK.3	102H4438	19	29	57	75	96				42	0.90		57	49	1.18	
	TLES4.8KK.3	102H4538	28	40	73	94	119				55	1.00		74	65	1.30		
	TLES5.7KK.3	102H4638	36	50	89	114	144				68	1.02		91	79	1.32		
	TLES6.5KK.3	102H4738	45	61	105	134	168				81	1.02		108	94	1.31		
	TLES7.5KK.3	102H4838	53	71	122	155	194				94	1.02	1.07	126	108	1.32	1.14	
	TLES8.7KK.3	102H4938	62	83	143	181	228				110	1.03	1.08	147	126	1.33	1.14	
	TLES10KK.3	102H4038									130	1.04		172	148	1.35	1.15	
	NLE8.8KK.4	105H6800	63	84	141	179	223				110	1.18	1.22	147	127	1.51	1.30	
	NLE10KK.4	105H6867	74	98	164	207	257				128	1.19	1.23	170	151	1.51	1.30	
4.	NLE11KK.4	105H6952	82	109	184	232	290				143	1.19	1.22	191	165	1.52	1.31	
	NLE13KK.4	105H6959	99	131	217	274	340				170	1.18	1.23	226	194	1.50	1.29	
	NLE15KK.4	105H6968	110	146	243	307	382				190	1.20	1.25	253	213	1.53	1.32	
	TLY4 KK.3	102H4442	19	29	57	74	95				42	0.96	0.99	57	49	1.26	1.08	
3.	TLY4.8KK.3	102H4542	28	40	73	94	119				55	1.04	1.06	74	65	1.35	1.16	
	TLY5.7KK.3	102H4642	36	51	89	114	144				68	1.03	1.06	91	79	1.33	1.15	
	TLY6.5KK.3	102H4742	46	62	106	135	170				82	1.10	1.14	110	94	1.42	1.22	
	TLY7.5KK.3	102H4842	53	71	122	155	194				94	1.09	1.14	126	108	1.41	1.22	
	TLY8.7KK.3	102H4942	65	86	144	182	227				112	1.12	1.16	149	126	1.44	1.24	
	TLX4KK.3	102H4447	21	32	59	76	95				45		1.15***	60	52			
	TLX4.8KK.3	102H4547	36	52	90	116	146				57		1.24***	76	65			
	TLX5.7KK.3	102H4647	37	52	91	115	143				70		1.28***	93	80			
High Energy-optimized	3.	TLX6.5KK.3	102H4747	46	63	106	133	165				83		1.30***	110	95		
		TLX7.5KK.3	102H4847	55	75	125	157	195				98		1.32***	130	112		
	TLX8.7KK.3	102H4947	65	88	146	184	227				115		1.31***	152	131			
	NLX8.8KK	105H6874	60	83	144	182	227				111		1.35	148	127			
	1.	NLX10KK	105H6871	74	100	169	215	269				131		1.36	174	150		
		NLX11KK	105H6984	84	112	189	240	300				147		1.36	195	168		
		NLX13KK	105H6983	98	133	223	282	350				174		1.36	231	199		
		NLX15KK	105H6981	110	147	249	317	397				193		1.34	257	221		
		NLX8.0KK.2	105H6010	52	73	130	167	210				99		1.47***	133	115		
		NLX8.8KK.2	105H6011	62	85	147	187	234				113		1.49***	151	130		
NLX10KK.2		105H6101	75	101	171	217	271				133		1.49***	178	153			
NLX11KK.2		105H6971	86	115	192	242	301				150		1.49***	200	172			

Private Picture Copyright : WWW.MBSM.PRO

Description

Product details

Gross weight	12.47 kg
Net weight	12.47 kg
Gross weight	12.47 kg

Net weight	12.47 kg
-------------------	----------

Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm³]	2360 cm ³
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No

Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm³]	270 cm ³
Oil type	POE
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm³]	11.15 cm ³

Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C
Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm3]	2360 cm3
Frequency [Hz]	50

Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm³]	270 cm ³
Oil type	P0E
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF

Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm³]	11.15 cm ³
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C

Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50Mbsm_dot_pro_private_PDF_nlx11kk.2

		-35	-30	-20	-15	-10	-5	0	5	(W)	(W/W)	(W)	(W/W)	(W/W)	(W/W)
	PLE35K	10190360								27	0.68	36	33		
	TLE35KK.3	10294430	19	29	57	75	96			42	0.90	57	69	1.16	
	TLE35KK.4	10294433	28	40	73	94	119			55	1.00	74	65	1.30	
	TLE35.7KK.3	10294435	36	50	89	114	144			68	1.02	91	79	1.52	
	TLE35.7KK.4	10294438	45	61	105	134	168			81	1.02	108	94	1.51	
	TLE35.7KK.3	10294439	53	71	122	155	194			94	1.02	126	108	1.52	1.14
	TLE35.7KK.4	10294441	62	80	143	181	228			110	1.03	147	126	1.53	1.14
	TLE35.7KK.3	10294443								130	1.04	172	148	1.55	1.15
	TLE35.7KK.4	10294445								150	1.04	197	172	1.57	1.20
	TLE35.7KK.3	10294447	74	89	164	207	257			128	1.19	170	151	1.57	1.30
	TLE35.7KK.4	10294449	82	100	184	232	290			143	1.19	191	165	1.52	1.31
	TLE35.7KK.3	10294451	99	117	217	274	340			170	1.18	226	194	1.50	1.29
	TLE35.7KK.4	10294453	110	146	243	307	382			190	1.20	251	219	1.53	1.32
	TLY4.8KK.3	10294442	19	29	57	74	95			42	0.96	57	69	1.26	1.08
	TLY4.8KK.4	10294444	28	40	73	94	119			55	1.04	74	65	1.35	1.16
	TLY5.7KK.3	10294446	36	51	89	114	144			68	1.03	91	79	1.53	1.15
	TLY5.7KK.4	10294448	46	62	106	135	170			82	1.10	110	94	1.42	1.22
	TLY7.7KK.3	10294449	53	71	122	155	194			94	1.09	126	108	1.41	1.22
	TLY8.7KK.3	10294450	65	86	144	182	227			112	1.12	149	126	1.44	1.24
	TLE4.8KK.3	10294447	21	32	59	76	95			45	1.10***	60	52		
	TLE4.8KK.4	10294448	36	52	90	116	146			57	1.20***	76	65		
	TLE5.7KK.3	10294449	37	52	91	115	143			70	1.20***	93	80		
	TLE6.7KK.3	10294447	46	63	106	133	165			83	1.20***	110	95		
	TLE7.7KK.3	10294447	55	75	125	157	195			98	1.32***	130	112		
	TLE8.7KK.3	10294447	65	88	146	184	227			115	1.30***	152	131		
	NLE3.8KK	102940874	60	83	144	182	227			111	1.35	148	127		
	NLE3.8KK	102940871	74	100	169	215	269			131	1.36	174	150		
	NLE3.8KK	102940884	84	112	189	240	300			147	1.36	195	168		
	NLE3.8KK	102940885	98	133	223	282	350			174	1.36	231	199		
	NLE3.8KK	102940881	110	147	249	317	397			193	1.34	257	221		
	NLE3.8KK.2	102940010	52	73	130	167	210			99	1.40***	133	115		
	NLE3.8KK.2	102940011	62	85	147	187	234			113	1.40***	151	130		
	NLE3.8KK.2	102940012	75	101	175	217	271			133	1.40***	176	153		
	NLE3.8KK.2	102940011	86	115	192	242	301			150	1.40***	200	172		