


Mbsm.pro, Compressor, Domper, LJ88DY1, R600a, Lbp, 1/5 hp, 185 w, 8.8 cm³

written by Jamila | 3 December 2022

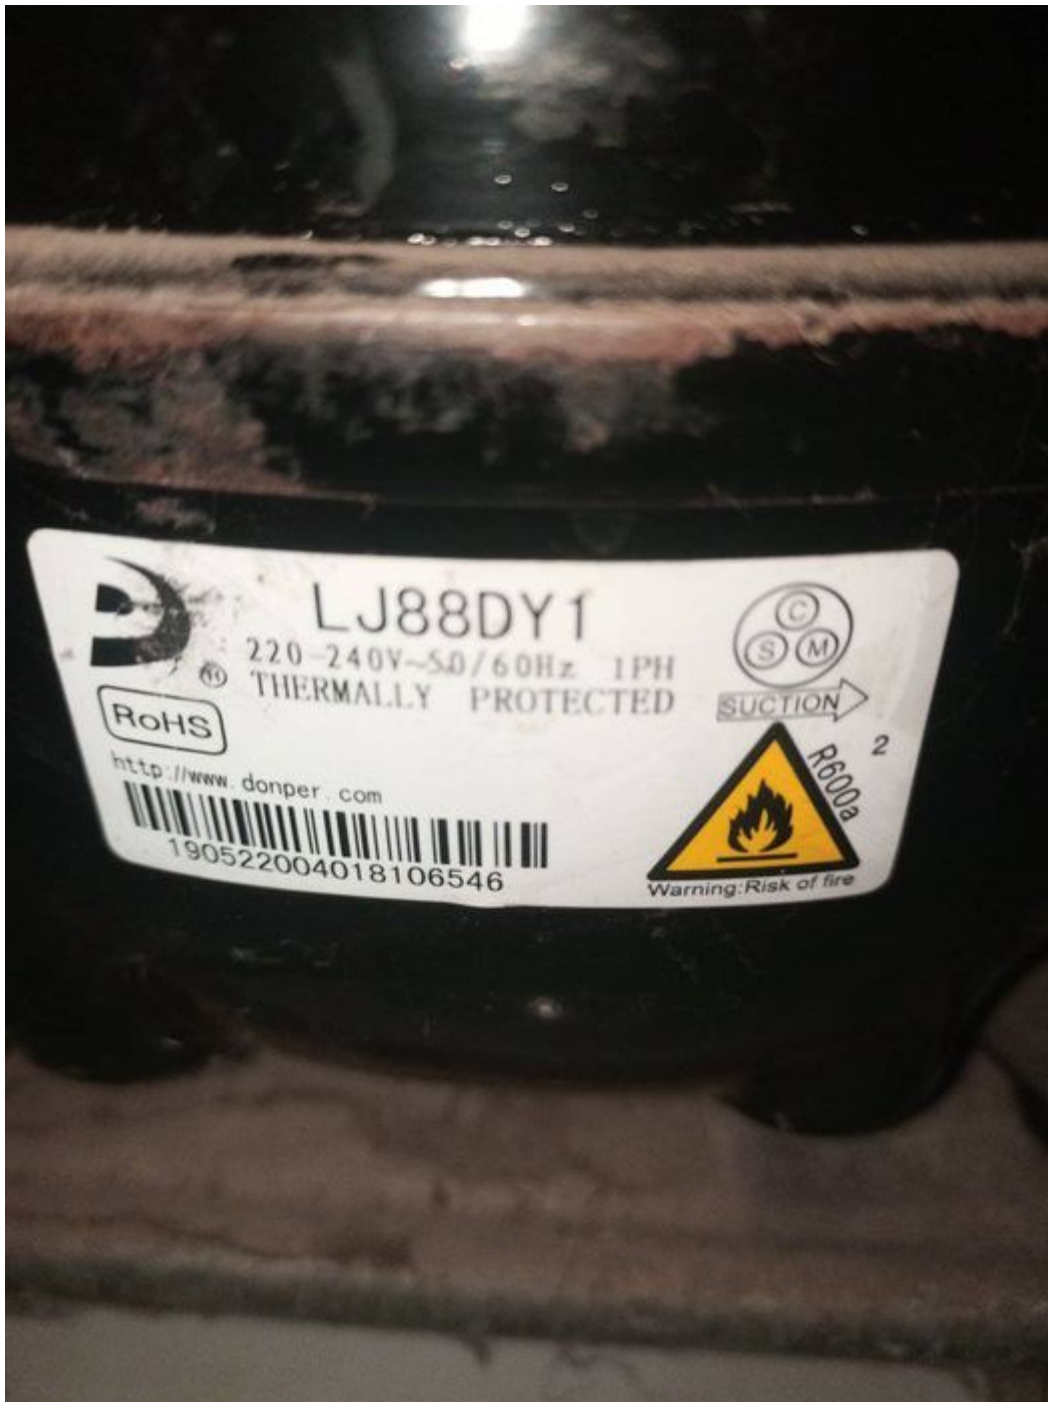

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Domper, LJ88DY1, R600a, Lbp, 1/5 hp, 185 w, 8.8 cm³

**Mbsm.pro, compressor,
Panasonic, 1/3 hp, Lbp, E
Series, R134a, ETI57C13DCH,
ENI68C13DCH, Reciprocating,
Compressors, Variable Speed,
inverter, BLCD, from 63 to
240 w, 240v+-, from 60 to 268
hz, from 25 rps to 72 rps**

written by Jamila | 3 December 2022



Mbsm.pro, compressor, Panasonic, Lbp, E Series, R134a, ETI57C13DCH, ENI68C13DCH, Reciprocating, Compressors, Variable Speed, inverter, from 63 to 240 w, 240v+-, from 60 to 268 hz, from 25 rps to 72 rps

**Mbsm.pro, Compressor, GL60AA,
GL60AB, GL50AA, GL50AB,
AZ107Y, AZ90, YGVM44AA,**

GLY45AA, GLY45AA, TLS5F, 1/6 hp, 1bp

written by Jamila | 3 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, GL60AA, GL60AB, GL50AA, GL50AB, AZ107Y, AZ90Y, GVM44AA, GLY45AA, 1/6 hp, 1bp

**Mbsm.pro, Compressor,
Eateron, E100HL, R-134,
23.3C, 280W, HUAYI, LBP**

written by Jamila | 3 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Eaton, E100HL, R-134, 23.3C, 280W, HUAYI, LBP

**Mbsm.pro, compressor, Highly,
hitachi, rotary, SHX33 , 2
hp, 17750 btu, R22**

written by Jamila | 3 December 2022




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Highly, hitachi, rotary, SHX33 , 2 hp, 17750 btu, R22

Mbsm.pro, Danfoss, Reciprocating, compressor, NLX11KK.2, 105H6971, NLX11KK.2 105H6971, 1/4 hp++, 1/3 hp-, r600a

written by mahdi miled | 3 December 2022



			-35	-30	-20	-15	-10	-5	0	5	[W]	[W/W]	[W/W]	[W]	[kcal/h]	[W/W]	[kcal/Wh]		
Energy-optimized	1.	PLE35K	101H0360			38	52	68	87	109		27		0.68	38	33			
		TLES4KK.3	102H4438	19	29	57	75	96				42	0.90		57	49	1.18		
	2.	TLES4.8KK.3	102H4538	28	40	73	94	119				55	1.00		74	65	1.30		
		TLES5.7KK.3	102H4638	36	50	89	114	144				68	1.02		91	79	1.32		
	3.	TLES6.5KK.3	102H4738	45	61	105	134	168				81	1.02		108	94	1.31		
		TLES7.5KK.3	102H4838	53	71	122	155	194				94	1.02	1.07	126	108	1.32	1.14	
	4.	TLES8.7KK.3	102H4938	62	83	143	181	228				110	1.03	1.08	147	126	1.33	1.14	
		TLES10KK.3	102H4038									130	1.04		172	148	1.35	1.15	
	High Energy-optimized	1.	NLE8.8KK.4	105H6800	63	84	141	179	223				110	1.18	1.22	147	127	1.51	1.30
			NLE10KK.4	105H6867	74	98	164	207	257				128	1.19	1.23	170	151	1.51	1.30
2.		NLE11KK.4	105H6952	82	109	184	232	290				143	1.19	1.22	191	165	1.52	1.31	
		NLE13KK.4	105H6959	99	131	217	274	340				170	1.18	1.23	226	194	1.50	1.29	
3.		NLE15KK.4	105H6968	110	146	243	307	382				190	1.20	1.25	253	213	1.53	1.32	
		TLY4 KK.3	102H4442	19	29	57	74	95				42	0.96	0.99	57	49	1.26	1.08	
4.		TLY4.8KK.3	102H4542	28	40	73	94	119				55	1.04	1.06	74	65	1.35	1.16	
		TLY5.7KK.3	102H4642	36	51	89	114	144				68	1.03	1.06	91	79	1.33	1.15	
5.		TLY6.5KK.3	102H4742	46	62	106	135	170				82	1.10	1.14	110	94	1.42	1.22	
		TLY7.5KK.3	102H4842	53	71	122	155	194				94	1.09	1.14	126	108	1.41	1.22	
High Energy-optimized	6.	TLY8.7KK.3	102H4942	65	86	144	182	227				112	1.12	1.16	149	126	1.44	1.24	
		TLX4KK.3	102H4447	21	32	59	76	95				45		1.15***	60	52			
	7.	TLX4.8KK.3	102H4547	36	52	90	116	146				57		1.24***	76	65			
		TLX5.7KK.3	102H4647	37	52	91	115	143				70		1.28***	93	80			
	8.	TLX6.5KK.3	102H4747	46	63	106	133	165				83		1.30***	110	95			
		TLX7.5KK.3	102H4847	55	75	125	157	195				98		1.32***	130	112			
	9.	TLX8.7KK.3	102H4947	65	88	146	184	227				115		1.31***	152	131			
		NLX8.8KK	105H6874	60	83	144	182	227				111		1.35	148	127			
	High Energy-optimized	1.	NLX10KK	105H6871	74	100	169	215	269				131		1.36	174	150		
			NLX11KK	105H6984	84	112	189	240	300				147		1.36	195	168		
2.		NLX13KK	105H6983	98	133	223	282	350				174		1.36	231	199			
		NLX15KK	105H6981	110	147	249	317	397				193		1.34	257	221			
3.		NLX8.0KK.2	105H6010	52	73	130	167	210				99		1.47***	133	115			
		NLX8.8KK.2	105H6011	62	85	147	187	234				113		1.49***	151	130			
4.		NLX10KK.2	105H6101	75	101	171	217	271				133		1.49***	178	153			
		NLX11KK.2	105H6971	86	115	192	242	301				150		1.49***	200	172			

Private Picture Copyright : WWW.MBSM.PRO

Description

Product details

Gross weight	12.47 kg
Net weight	12.47 kg
Gross weight	12.47 kg

Net weight	12.47 kg
-------------------	----------

Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm³]	2360 cm ³
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No

Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm³]	270 cm ³
Oil type	POE
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm³]	11.15 cm ³

Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C
Application energy level	High Energy-optimized
Applications	LBP
Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm3]	2360 cm3
Frequency [Hz]	50

Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm3]	270 cm3
Oil type	POE
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF

Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm³]	11.15 cm ³
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C

Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50Mbsm_dot_pro_private_PDF_nlx11kk.2

			-35	-30	-20	-15	-10	-5	0	5	(W)	(W/W)	(W)	(W/W)	(W/W)	(W/W)
Energy optimized	PLE35K	102H40360			35	52	68	87	105		27	0.68	36	33		
	TL5400K.3	102H44330	19	29	57	75	96				42	0.90	57	49	1.18	
	TL5430K.3	102H44330	28	40	73	94	119				55	1.00	74	65	1.30	
	TL5470K.3	102H44330	36	50	89	114	144				68	1.02	91	79	1.52	
	TL5490K.3	102H44730	45	61	105	134	168				81	1.02	108	94	1.51	
	TL5530K.3	102H44330	53	71	122	155	194				94	1.02	126	108	1.52	1.14
	TL5570K.3	102H44330	62	83	143	181	228				110	1.03	147	126	1.53	1.14
	TL5590K.3	102H44330									130	1.04	172	148	1.55	1.15
	TL5630K.4	102H40360	62	84	140	179	223				110	1.18	147	127	1.51	1.20
	TL5690K.4	102H40360	74	99	164	207	257				128	1.19	170	151	1.51	1.30
High Energy optimized	TL5730K.4	102H40360	82	108	184	232	290				143	1.19	191	165	1.52	1.31
	TL5790K.4	102H40360	99	137	217	274	340				170	1.18	226	194	1.50	1.29
	TL5830K.4	102H40360	110	146	243	307	382				190	1.20	251	215	1.53	1.32
	TL5400K.3	102H44342	19	29	57	74	95				42	0.96	57	49	1.26	1.08
	TL5430K.3	102H44342	28	40	73	94	119				55	1.04	74	65	1.35	1.16
	TL5470K.3	102H44342	36	51	89	114	144				68	1.03	91	79	1.33	1.15
	TL5490K.3	102H44742	46	62	106	135	170				82	1.10	110	94	1.42	1.22
	TL5530K.3	102H44342	53	71	122	155	194				94	1.09	126	108	1.41	1.22
	TL5570K.3	102H44342	65	86	144	182	227				112	1.12	149	126	1.44	1.24
	TL5590K.3	102H44342	71	92	159	202	251				125	1.12	167	144	1.44	1.24
High Energy optimized	TL5630K.3	102H44342	86	111	184	232	290				143	1.12	191	165	1.45	1.25
	TL5690K.3	102H44342	99	129	217	274	340				170	1.12	226	194	1.45	1.25
	TL5730K.3	102H44742	110	146	243	307	382				190	1.12	251	215	1.45	1.25
	TL5790K.3	102H44342	125	164	274	340	423				215	1.12	286	245	1.45	1.25
	TL5830K.3	102H44742	140	184	307	382	471				240	1.12	321	275	1.45	1.25
	TL5890K.3	102H44342	155	202	340	423	517				265	1.12	356	305	1.45	1.25
	TL5930K.3	102H44742	170	221	374	463	561				290	1.12	391	335	1.45	1.25
	TL5990K.3	102H44342	185	240	407	500	603				315	1.12	426	365	1.45	1.25
	TL6030K.3	102H44742	195	255	431	527	635				330	1.12	451	385	1.45	1.25
	TL6090K.3	102H44342	205	270	455	554	662				345	1.12	476	405	1.45	1.25

**Mbsm.pro, compressor,
PW3.5VK, DFV4.0HF, DFV4.5HF,
DFV5.5HF, DFV6.5HF, DFV6.5HF,
DFV7.5HF,**

written by mahdi miled | 3 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, PW3.5VK, DFV4.0HF, DFV4.5HF, DFV5.5HF,
DFV6.5HF, DFV6.5HF, DFV7.5HF,

**Mbsm.pro, Compressor, nf10fx,
Danfoss, 1/3 hp, LBP, MBP,
1046 btu, 115 v**

written by Jamila | 3 December 2022




Mbsm.pro, Compressor, nf10fx, Danfoss, 1/3 hp, LBP, MBP, 1046
btu, 115 v

**Mbsm.pro, R-410A, Fixed
Speed, Rotary, Compressor,
Mitsubishi, NN21YDAMT, 1.74
hp, 18000 btu, 3 Ph, 380 v**

written by Jamila | 3 December 2022



SIAM COMPRESSOR
INDUSTRY CO., LTD.



WARNING

(... .., etc.)
 Hazards
 without the cover.
 with bare hands
 after disassemb.
 welding
 ELECTRIC

REFRIGERANT COMPRESSOR
MODEL **NN21YDAMT**

MANUFACTURING DATE **05112016**

POWER SOURCE
380-415V 3~ 50Hz
460V 3~ 60Hz

POWER INPUT	1780	W	AT	50	Hz
LRA	31/33				A
REFRIGERANT	R-410A				
OIL	1.20	L			
AP	4.15				MPa
SP	15.0				MPa

THERMALLY PROTECTED

MADE IN THAILAND



Mbsm.pro, R-410A, Fixed Speed, Rotary, Compressor, Mitsubishi,
NN21YDAMT, 1.74 hp, 18000 btu, 3 Ph, 380 v

**Mbsm.pro, Cubigel, GP16TB,
hermetic, compressor, 3/8
hp++, 1/2 hp-, HBP, R134a,
R1234yf, CSIR,**

written by Lilianne | 3 December 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Cubigel, GP16TB, hermetic, compressor, 3/8 hp++, 1/2 hp-, HBP, R134a, R1234yf, CSIR,