

Compressor, ACC, Cubigel, GL60AN, R134a, 220-240V, HMBP, 1/6HP

written by Lilianne | 18 March 2021

Type: Hermetic piston compressors Producer: ACC Series: HMBP

Model: GL60AN

General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	50

Compressor's data

Cylinder capacity [cm ³]:	6
Displacement [m ³ /h]:	1
Weight [kg]:	9,9
Oil charge [cm ³]:	345
Oil type:	ISO VG 19 ESTER

Engine's data

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	170-264
Locked rotor current [A]:	14,6
Running winding resistance (25°C) [Ω]:	9,33
Starting winding resistance (25°C) [Ω]:	10,81

Electrical data

Relays:	3003
Shielding element:	MRA38085, T0515, AF11BJ
Starting capacitor volume [μ F]:	

Connections

	millimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_GL60ANTélécharger

Compressor, ROHS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

written by Lilianne | 18 March 2021



Basic Info.

Model NO.
CAE4448Y
Refrigerant Type
Ammonia
Refrigerant

R134A

Voltage

208V/50Hz 230V/60Hz

Horsepower

1/3HP

Capacity(W)

519W

Input Power(Kw)

400W

Oil Charge (Cm3)

450

Net Weight(Kg)

12kg

Cop(W/W)

1.64

Trademark

tecumseh

Transport Package

Wooden Box

Specification

208V/50HZ 230V/60HZ

Origin

France

HS Code

8414309010

1/3HP HBP Original Made in France R134A Tecumseh Compressor

CAE4448Y Refrigerator Compressor For

Refrigerator/Showcase/Cold Room

Product Description

Model: CAE4448Y

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

Description rapide

Condition:	Nouveau	Type:	Piston
Configuration:	Stationnaire	Source d'énergie:	Alimentation AC
Modèle de lubrifica...	Lubrifié	Muet:	Oui
Point d'origine:	Guangdong, China	Marque nom:	tecumseh
Numéro de Type:	CAE4448Y	Tension:	208 ~ 220V/1PH/50HZ
Dimension (L*W*H):	1 unité	Poids:	20kg
Certification:	ROHS	Garantie:	1 année
Service après-vente...	Aucun service d'outre-mer fourni	Gaz:	R134a
Chevaux:	1/3HP		

Private Picture Copyright: WWW.MBSM.PRO

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	254	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3

Private Picture Copyright: WWW.MBSM.PRO

Basic Info.

Model NO.	CAE4448Y	Refrigerant Type	Ammonia
Refrigerant	R134A	Voltage	208V/50Hz 230V/60Hz
Horsepower	1/3HP	Capacity(W)	519W
Input Power(Kw)	400W	Oil Charge (Cm3)	450
Net Weight(Kg)	12kg	Cop(W/W)	1.64
Trademark	tecumseh	Transport Package	Wooden Box
Specification	208V/50HZ 230V/60HZ	Origin	France
HS Code	8414309010		

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, Lu126cy1, 1/3 Hp, R600a

written by Lilianne | 18 March 2021



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

written by Lilianne | 18 March 2021
Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	–
COP@CECOMAF	–



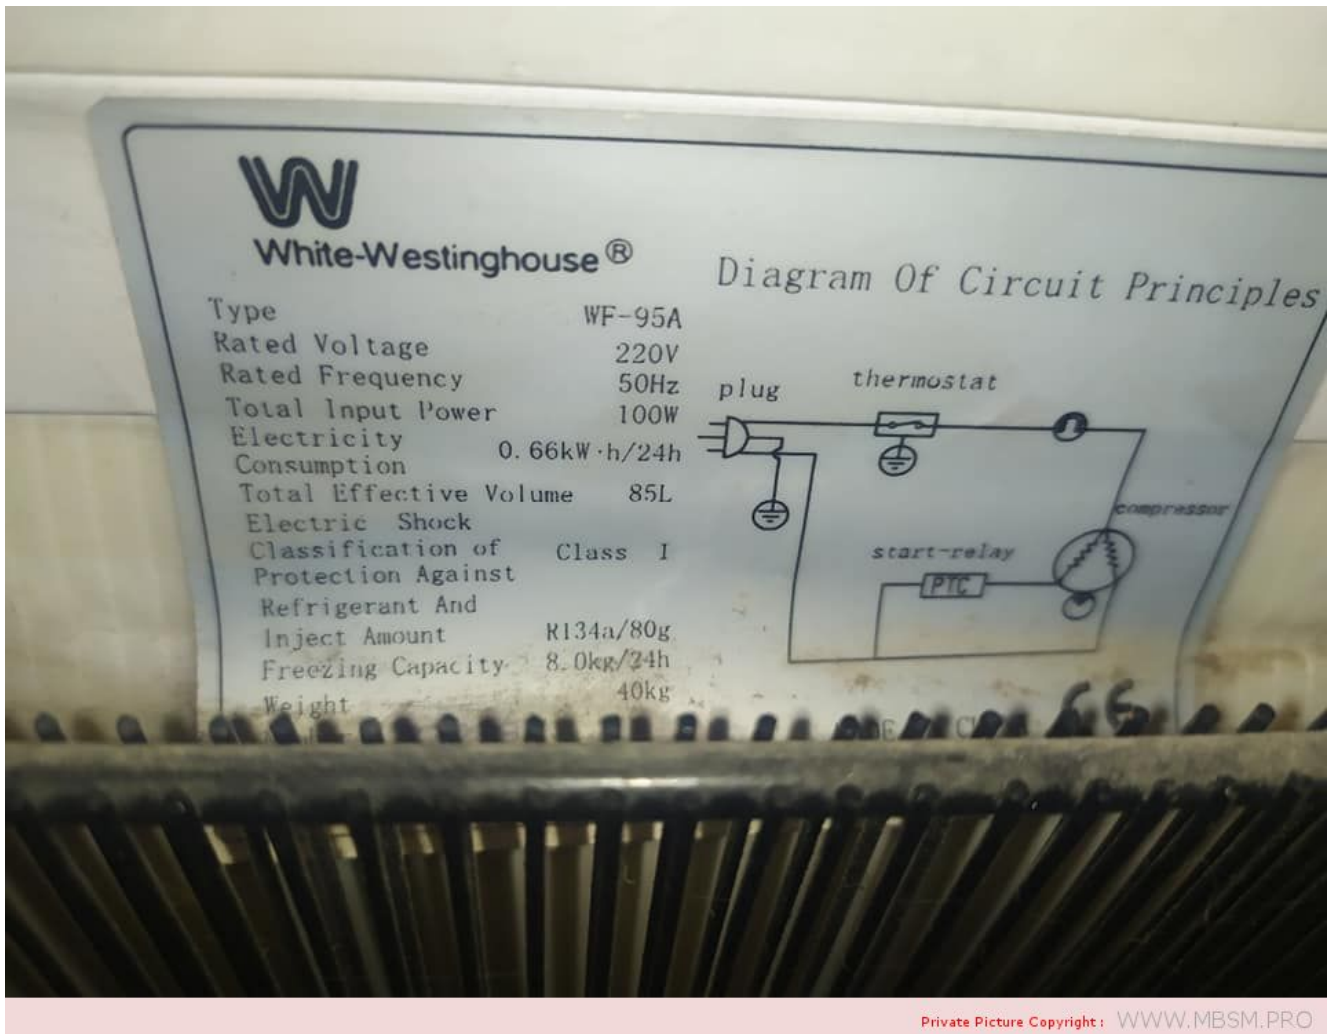

Mbsm_dot_pro_private_PDF_SB48C95GAW5Télécharger

**HERMETIC, Freezer,
COMPRESSOR, ZEL, GTH86AA,
R134A, 1/4 Hp, Lbp, 230W,
8.6CC**

written by Lilianne | 18 March 2021

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

- 1.Low levels of noise and vibration
- 2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ										
Model	Displ.(cm ³)	Motor Type	Cooling capacity(w)	Input Power		COP		Run Capacltor	Start Capacltor	Height(mm)
				without RC(w)	with RC(w)	without RC(w/w)	with RC(w/w)			
Standard Efficiency Range										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
Medium Efficiency Range										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183



**Compressor, NL7.3FT, SECOP,
105G6726, DANFOSS, 6726,
105G, 105 G 6726, 105G 6726,
1/5 HP, 180W, LBP, Zanussi,
Kiriazi Electric Company, TGV**

335L, NO FROST, TSV 320L, FC 83L , R134A, 125G, 220-240V 50Hz, CSIR

written by Lilianne | 18 March 2021

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	

R134A	LBP	1/5	156	NL6FT.2	NL
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (CSIR)	
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	⁺ 4 / (1)	213	NLY7F	
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	⁺ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	⁺ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / HBP	1/3	264	SC12G	SC
R134A	LBP / MBP / HBP	1/2	392	SC18G	
R134A	LBP / MBP / HBP	3/4	456	SC21G	
R134A	MBP	3/4	1073	SC21MFX	
R134A	LBP	3/4	567	SC21FTX	
R404A	LBP	1	1033	ST21CL	
R404A	LBP	1	986	SC18CLX.2	
R404A	MBP	1/2	359/650	SC15MLX	
R404A	MBP	7/8	762/1584	SC18MLX	

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product

No Frost Refrigerator

Class

T

Model

E 335N/3

Current / Amp.

1.1/~

Rated Voltage

220-240V/50HZ

Refrigerant

R 134a

125g

Rated input of lamp

1 x 25 W

Total Gross Volume

335 L

Ins : Basic

Type II

IPX4

Total Storge Volume

320 L

Freezing Capacity

4 kg/24hr

Freezer Capacity

83L

ES 6000 / 2008
ES 3793 / 2006

Tow Door Ref.

Serial Number

Made in Egypt



REDMI NOTE 8
AI QUAD CAMERA



● ○ REDMI NOTE 8
∞ AI QUAD CAMERA



Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-20
11_desd406c102Télécharger



Refrigerant	Applic	oil cooling	Evaporating temperature [°C]																				
			Evaporating tem																				
			-35	-30	-25	-20	-15	-10	-5	0	5	10	15	-25	-10								
R134a	LBP		PL50F	101G0220		1/20	14	26	40	56	74	95									60	86	
			TL53FT	102G4324		1/16	21	34	50	69	92	120										62	93
			TL54FT	102G4424		1/10	27	43	63	88	117	152										88	123
			TL55FT	102G4524		1/8+	48	71	98	131	170	216										114	165
			TL55.7FT.3	102G4615		1/6	66	90	120	156	200	253										120	170
			TL56.5FT.3	102G4703		1/5			136													139	
			NL6FT	105G6628		1/6	60	84	115	152	198	253										123	184
			NL6.1FT	105G6620		1/6	60	84	115	152	198	253										123	184
			NL7FT	105G6728	105G6738	1/5	71	100	136	181	235	299										145	220
			NL7.3FT	105G6726		1/5	71	100	136	181	235	299										145	220
			NL8.4FT	105G6865		1/4	87	120	162	213	275	350										169	252
			NL9FT	105G6828	105G6838	1/4	87	120	162	213	275	350										169	252
			NL10FT	105G6829	105G6839	1/3	113	158	213	281	361	455										215	316
			NLE7.3FT	105G6710		1/4	92	118	154	201	258	325										148	221
			SC12FT	104G8205	104G8215	1/3	103	163	233	314	408	517	645									265	380
			SC15FT	104G8505		1/2	126	197	280	376	489	620	772									311	451
			SC18FTX	104G8805		5/8	144	229	325	437	567	719	896									365	517
		SC21FTX 50Hz	104G8105		3/4	192	296	415	553	713	901	1119									428	613	
		SC21FTX 60Hz	104G8106		3/4	240	345	470	620	800	1012	1262									475	707	
		LBP/MBP (HBP)		TL2.5G	102G4251		1/12	11	23	36	51	69	90	116	145	179	219	264			60	84	
			TL3G	102G4350		1/12		25	41	59	81	106	136	170	211	258	312				66	96	
			TL4G	102G4452		1/8		41	58	80	107	140	180	226	280	342	413				83	118	
			TL5G	102G4550		1/6		56	79	107	139	178	224	278	341	414	497				100	149	
			FR6G	103G6660		1/5		48	83	124	171	226	290	365	452	552					109	172	
			FR7.5G	103G6680	103G6690	1/5		62	99	142	193	254	325	408	505	618					126	194	
			FR8.5G	103G6780	103G6790	1/4		85	123	171	228	298	381	478	592	722					151	231	
			FR10G	103G6880	103G6890	1/4		92	136	188	250	324	412	516	638	779					179	265	
			FR11G	103G6980		1/3		115	170	233	307	395	501	628	780						202	317	
			TL6.5MF	102G4781		1/4				174	219	279	349	425	520							202	
			NL6.1MF	105G6660		1/5				141	189	245	312	390	482	588	709					187	
			NL7.3MF	105G6772		1/4				179	236	304	385	480	591	719	867					227	
			NL8.4MF	105G6879		1/4+				213	277	353	445	553	679	825	994					261	
			NL10MF	105G6885		1/3				266	346	441	554	687	843	1023	1231					323	
			NL10MF	105G6888		1/3	88	137	194	262	343	440	554	688	845							198	308
			NL11MF	105G6151		3/8				292	380	485	609	756	927	1125	1354						360
	SC10G		104G8000		5/16	23	60	113	183	268	369	486	618	764	925	1100					181	290	
	SC12G		104G8240	104G8250	3/8	65	113	175	252	348	464	603	768	960	1182	1437	227				227	355	
	SC15G	104G8520	104G8530	1/2				164	290	424	568	728	908	1110	1340	1600				233	440		
	SC18G	104G8820	104G8830	1/2+				283	394	526	684	870	1087	1337	1624	1950				331	507		

model	watt	HP	LBP/MBP	نوع گاز	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	دوگازین SC21G
SC21FTX	567	3/4	LBP	134	دوگازین SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سفن NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	دوگازین SC12G (پارته و مخزن)
NL11MF	621	1/3	MBP	134	دوگازین SC12G (پارته و مخزن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سفن NL7 - High efficiency (تامن 7%)
NLY7F	213		LBP	134	سفن NL9 - High efficiency (تامن 7%)
NLY9FK	237		LBP	134	High efficiency (تامن 7%)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -23.3°C ASHRAE) زیر صفر
(MBP @ -4.7°C ASHRAE) بالای صفر

**Refrigeration, Compressor,
K270CZ1, 1/3++, DONPER,
Dongbei, K325CZ1, K375CZ1**

, freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

written by Lilianne | 18 March 2021

Quick Details

Temperature:

-25° ~ +15°

Cooling Capacity:

1ton

Panel Thickness:

50mm

Applicable Industries:

Retail

After Warranty Service:

Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L*W*H):

10-10*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:

New Product 2020

Warranty of core components:

1 Year

Core Components:

Motor

Color:

Balck

Product name:
Refrigerator Compressor

Refrigerant:
R134a

model:
K270CZ1

Cooling capacity:
230W

Product Description

Refrigerant	R134a	Cooling capacity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm ³
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm ³	Weight	9.8±0.4kg

Structure





Private Picture Copyright : WWW.MBSM.PRO



PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO

Notice : process channel and air suction pipe can not interchangeable

Product Name : Donper Compressor	Model: K270CZ1
Application : Refrigerator	Power supply :220v~240v/50Hz
Refrigeration capacity:270W	Power :220W
cylinder volume:9.5cm ³	refrigerant: R134a
Motor :RSIR	COP:1.3W/W
Weight :9.8±0.4kg	working current :1.5A



Private Picture Copyright : WWW.MBSM.PRO

Compressor Details

Production Name	Refrigerator compressor	Model	K270CZ1
Application	Refrigerator/ Freezer(300L~400L)	Power	220V~240V/50HZ
Cooling capacity	270W	Input power	220W
Cylinder volume	9.5Cm ³	Refrigerant	R134a
Motor type	RSIR	COP	1.3W/W
Weight	9.8±0.4kg	Current	1.5A

Private Picture Copyright : WWW.MBSM.PRO

Product Specification

Capacity	500 L
Type	Top Open

Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500
Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control,Digital Display,75mm Insulation Wall Thickness,Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm
Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness
- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details	Box Dimensions: 1695 x 760 x 880mm Included:1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays
----------------------	--



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg





**FR6B, Compressor, 103U2654,
FR6B 103U2654, DANFOSS TL, FR
and SC Hermetic Compressors,
DANFOSS, Kiriazi, 343L, 1/5
Hp, MBP, R12, 280g,**

équivalence, 1/4Hp, R134A, 190g

written by Lilianne | 18 March 2021

Compresseurs hermétiques DANFOSS TL, FR et SC

BOC partie No.	Code Danfoss	Puissance nominale et applic	Refrig.	Capacité nominale (watts)	Réf. BOC	Code Danfoss	Puissance nominale et applic	Réfrigérer	Capacité nominale (watts)
FR6B	103U2654	1/5 MBP	R12	354	TL3F	102G4300	1/10 LBP	R134a	58
FR8.5B	103U2854	1/4 MBP	R12	450	TL4F	102G4400	1/8 LBP	R134a	84
SC10B *	104L2510	1/3 MBP	R12	588	TL55F	102G4520	1/6 LBP	R134a	127
FR11B	103U2154	1/3 MBP	R12	624	TL57F	102G4720	1/5 LBP	R134a	162
SC12B *	104L2670	4/9 MBP	R12	756	NL7F	105G6706	1/4 LBP	R134a	183
SC15B *	104L2830	1/2 MBP (LBP)	R12 (R502)	912 (768)	NL9F **	105G6802	1/4 LBP	R134a	214
SC18B *	1042110	2/3 MBP (LBP)	R12 (R502)	1044 (900)	NL11F **	105G6910	1/4 LBP	R134a	274
SC21B	104L2310	3/4 MBP	R12	1212	SC15F **	104G8500	1/3 LBP	R134a	319
SC10B	104L2510	1/3 LBP	R502	468	SC18F **	104G8800	4/9 LBP	R134a	395
SC12B	104L2670	4/9 LBP	R502	612	TL3G	104G4350	1/8 MBP	R134a	175
SC15C	104L2832	2/3 LBP	R502	768	TL4G	102G4452	1/6 MBP	R134a	215
SC18C	104L2111	3/4 LBP	R502	900	FR6G	103G6660	1/5 MBP	R134a	351
SC10G	104G8000	1/3 MBP	R134a	591	FR8.5G	103G6780	1/4 MBP	R134a	468
SC12G	104G8240	4/9 MBP	R134a	751	FR11G	103G6980	1/3 MBP	R134a	609
SC18G	104G8820	2/3 MBP	R134a	1059	SC15G	104G8520	1/2 MBP	R134a	892
SC21G	104G8140	3/4 MBP	R134a	1256	SC10CL	104L2523	1/3 MBP	R507	450
SC12CL	104L2623	4/9 LBP	R507	624	SC15CL	104L2853	2/3 LBP	R507	758
SC18CL	104L2123	3/4 LBP	R507	893					

Remarque:

1. Les compresseurs marqués ** sont équipés de raccords de refroidisseur d'huile.
2. Les compresseurs marqués * peuvent être utilisés sur les systèmes R502 avec fonctionnement à tube capillaire dans la gamme LBP.
3. (Systèmes sans dégivrage automatique uniquement).

Capacités nominales basées sur:

LBP = -23,3 ° C température d'évaporation

MBP = -5 ° C température d'évaporation

Relais de remplacement (appareil de démarrage)

Réf . BOC	Convient au modèle de compresseur
103N0011	TL3A à TL5A, FR7.5A à FR11A
103N0002	SC12A, SC15A





Private Picture Copyright : WWW.MBSM.PRO

FR6B	103 U26 54	1/ 5 M BP	R 1 2	3 5 4	T L 3 F	1 0 2 G 4 3 0 0	1 / 1 0 L B P	R 1 3 4 a	5 8
------	------------------	--------------------	-------------	-------------	------------------	--------------------------------------	---------------------------------	-----------------------	--------



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_103U2654Télécharger

Compresseur, MPT18LA, R-404A / R-507, Cubigel Compressors, 1/2 HP, LBP, CSR

written by Lilianne | 18 March 2021

Le compresseur à piston hermétique à basse température Cubigel MPT18LA est utilisé dans les équipements de réfrigération avec des températures de fonctionnement d'évaporation inférieures à -20 °C:

1. Réfrigérateurs
2. Congélateurs
3. Réfrigérées vitrines
4. Chambres frigorifiques pour produits surgelés.

Caractéristiques du compresseur Cubigel MPT18LA:

- Travailler sur le fréon R404a / R507a
- Application de LBP (Low Dack Pressure)
- Volume du cylindre 18 cm³
- Capacité d'huile 450 cm³
- Type d'huile ISO VG 32 ESTER
- Courant de démarrage 19 A
- Poids 12,5 kg

Caractéristiques du moteur du compresseur Cubigel MPT18LA:

- Type de moteur CSR
- Puissance 1/2 CV

- Tension 200-220V 50Hz
- Tension admissible 170-242 V



cubigel
CONDENSATORS
R404A
R507
MPT18LA
220-240V-50Hz PH1
THERMALLY PROTECTED
CE
MADE IN SPAIN
9041257434100130
2
09121

Mbsm_dot_pro_private_PDF_compresseur-acc-cubigell-electrolux-MPT16LATélécharger

Mbsm_dot_pro_private_PDF_huayi_compressor_mpt18la__r404a_220_50_1Télécharger

Compressor, AE4470Z-FZ3C, AE4470Z-FZ, Compressor Tecumseh, AE4470Z FZ, HBP/CBP, 1/2 HP, ++BIG, R-404a

written by Lilianne | 18 March 2021

Données techniques

- Modèle: **AE4470Z**
- Gaz: **R-404a**
- Température/Pression: **Haute Pression**
- Puissance: **1/2 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **12.01 cm³**
- Cons.Énergie -10°C: **597 W**
- Cons.Énergie -5°C: **631 W**
- Cons.Énergie 0°C: **663 W**
- Cons.Énergie +5°C: **693 W**
- Cons.Énergie +10°C: **721 W**
- T° De Condensation: **40 °C**

- Capacidad Frigorífica -20°C: **637 Kcal/h**
- Capacidad Frigorífica -15°C: **796 Kcal/h**
- Capacidad Frigorífica -10°C: **975 Kcal/h**
- Capacidad Frigorífica -5°C: **1178 Kcal/h**
- Capacidad Frigorífica 0°C: **1408 Kcal/h**
- Capacidad Frigorífica 5°C: **1671 Kcal/h**
- Capacidad Frigorífica 10°C: **1970 Kcal/h**
- Tipo Test: **EN.12900**

 Eaton
AE-3001-F
AE4470Z-FZ 250V - 50/60Hz
R404A
EPFL
CE
53 J0116 10 174734 A
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

Mbsm_dot_pro_private_PDF_AE4470Z-FZ3CTélécharger

Mbsm_dot_pro_private_PDF_compresseur-unite-hermetique-
tecumseh-ae4470zTélécharger