

جدول بأنواع الزيوت ، Mbsm.pro ،  
المناسبة لوسائط وضواغط التبريد و  
اللزوجة المناسبة لكل نوع من الضواغط ،  
table of the types of oils suitable  
for the appropriate refrigeration and  
liquefied media and compressors for  
each type of compressor

Category: Arabe,Solutions,Technologie,Tester ok  
written by Lilianne | 23 March 2019

Table of oil types suitable for appropriate refrigeration and liquefied media  
and compressors for each type of compressor

PAO (Polyalphaolefin) Polyamphalene oil

MN (Mineral Naphthenic) Oil

AB (Alkylbenzene) Petrol oil

POE (Polyol Ester) Polyethylene oil

PG (Polyglycol) Polyglycol

---

www.mbsm.pro ، Original New, ASD53K,  
Original New 1/6HP, R134a, LBP,  
Wanbao, Refrigerator, compressor,  
China, R134A, 220V/50Hz, 1PH, 144W,  
Huaguang, Refrigerator Reciprocating

Category: Solutions,Technologie,Tester ok  
written by Jamila | 23 March 2019

www.mbsm.pro ، Original New, ASD53K, Original New 1/6HP, R134a, LBP, Wanbao,  
Refrigerator, compressor,China, R134A, 220V/50Hz, 1PH, 144W, Huaguang,  
Refrigerator Reciprocating

---

www.mbsm.pro ، ASD65 ، R134A  
،220V/50Hz ،1/5HP 173W ،Huaguang  
،Refrigerator, Compressor ،LBP

Category: Solutions,Tester ok  
written by Lilianne | 23 March 2019

www.mbsm.pro ، ASD65 ، R134A ،220V/50Hz ،1/5HP 173W ،Huaguang ،Refrigerator,

# Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

Category: Solutions,Tester ok

written by Jamila | 23 March 2019

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

	Motore	cm <sup>3</sup>	Volt	Watt -10°C	Watt -30°C	
RIB5150	A9EV – R22 – 3/8 – LBP	CSR	9,29	220	642	
RIB5160	A11EV – R22 – 1/2 Hp – LBP	CSR	11,11	220	781	
RIB5350	A13EV – R22 – 5/8 Hp – LBP	CSR	13,35	220	967	
RIB5450	N17EV – R22 – 3/4 Hp – LBP	CSR	17,52	220	1221	
RIB5550	N21EV – R22 -1- Hp LBP	CSR	20,68	220	1464	
RIB5650	N23EV – R22 – 1,2 Hp – LBP	CSR	23,18	230	1616	
RIB7104	NB4 COMPRESS. R12 24V. FRAMEC 1/8 =					
RIB7108	NB8 COMPRESS. R12 24V.FRAMEC 175W.=					
RIB7113	NB13HP COMPRESS.R12 24V.FRAMEC 1/3=					
RIBB010	ETR 3 – R134A – 1/12 Hp – LBP	RSIR	3,00	220	127	
RIBB020	ETR 3,5 HP 1/10 R134A – LBP	RSIR	3,50	220	156	
RIBB030	ETR 4 HP 1/8 R134A – LBP	RSIR	4,10	220	179	
RIBB040	ETR 5 – R134a – HP 1/6 – LBP	RSIR	5,12	220	231	
RIBB050	ETR5,5 – R134a – 1/6 Hp – LBP	RSIR	5,55	220	257	
RIBB080	ESC5 – R134a – 1/6 Hp – LBP	RSIR	5,12	220	222	
RIBB100	ESC7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB110	ESC8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB130	ESC9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB140	ESC11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBB200	ESC4H – R134a – 1/8 Hp – LBP	RSIR	4,10	220	177	
RIBB400	ESR 7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB410	ESR 8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB430	ESR 9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB440	ESR11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBE040	TN17EV – R404 – 3/4 Hp – LBP	CSR	17,52	220		565
RIBE050	TN21EV – R404 – 1 Hp – LBP	CSR	20,68	220		644
RIBE060	TN23EV – R404 – 1,2 Hp – LBP	CSR	23,18	220		726
RIBT999	COMPRESSORE ELECTROLUX DESCR.BOLLA					



neue Type	Verdichter Type		Kälte- mittel	Bereich	Betrieb	Leistungsaufnahme Watt	Stromaufnahme A	Öl- füllung cm <sup>3</sup>	Bestell-Nr.
	Vorläufer Type								
<b>mit Esterölfüllung</b>									
*ETR 3			R134a	LBP	K	68	0,55	185	*230.051
*ETR 3,5			R134a	LBP	K	81	0,58	185	*230.053
*ETR 4			R134a	LBP	K	89	0,64	185	*230.055
*ETR 5			R134a	LBP	K	109	0,76	185	*230.057
*ETR 5,5			R134a	LBP	K	118	0,80	185	*230.059
*ESR 7	ESC 7		R134a	LBP	K	127	0,83	220	*230.073
*ESR 8	ESC 8		R134a	LBP	K	149	1,00	220	*230.075
*ESR 8,5	ESC 8,5		R134a	LBP	K	159	1,07	220	*230.077
*ESR 9	ESC 9		R134a	LBP	K	177	1,20	220	*230.079
*ESR 11	ESC 11		R134a	LBP	K	215	1,42	220	*230.081
ETR 4H	ES(C)R4H		R134a	HBP	K	187	1,13	185	-
ETR 5H	ES(C)R5H		R134a	HBP	K	231	1,30	185	-
ESR 7H	ESC 7H		R134a	HBP	K	288	1,61	220	-
ESR 9H	ESC 9H		R134a	HBP	K	396	2,31	220	-
ESR 11H	ESC 11H		R134a	HBP	K	472	2,64	220	-
TA 13 EV			R404 A	LBP	K/E	463	2,15	950	230.096
TN 17 EV			R404 A	LBP	K/E	627	2,93	950	230.097
TN 21 EV			R404 A	LBP	K/E	727	3,61	950	230.099

PictureS Mbsm Dot Pro : www.mbsm.pro

## Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Category: Solutions, Tester ok

written by Lilianne | 23 March 2019

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a  
3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

## EMBRACO Asprea Compressor NT6220Z

### Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP
- ASPERA

SKU: 3070180


### Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO



embraco

NT6220Z



CE

THERMALLY PROTECTED		200 - 240V ~ 50Hz
	R 134a	230V ~ 60Hz
POE. OIL 450CC	1 PH	

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE



212CN06

ΓΑ

M13G/TF6


embraco NT



R134a

HBP

# EM/NE/NT/NJ

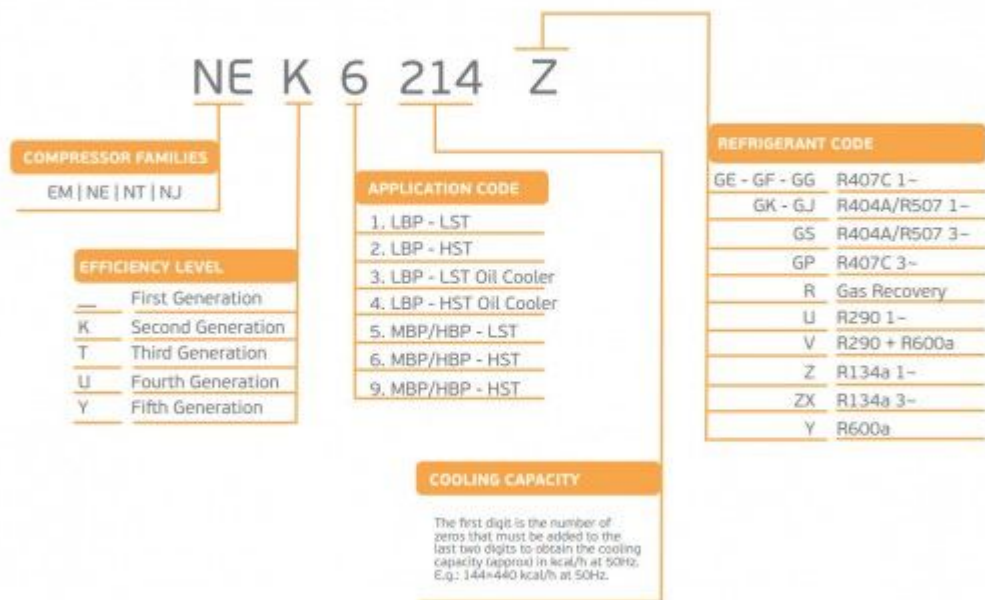

R134a								
50Hz 50-60Hz	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

## Mbsm.Pro , Tecumseh Refrigeration Compressor, CAE9460Z ,R404A refrigerant ,3/8 hp, mhbp, 1/2HP ,1PH(phase) , 220V to 240V

Category: Solutions,Tester ok

written by Jamila | 23 March 2019

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A refrigerant ,1/2HP ,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor



411445

   
6B88330200  
CAE9460Z

R404A LRA 17  
220-240V ~ 50Hz I<sub>A</sub> 3.40

  
53 D1510 10 195819 A  
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED

**LOW BACK PRESSURE COMPRESSORS**

Type	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE	
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature								
					Oil charge (cm <sup>3</sup> )	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C		-10°C
						t	t	t	t	t	t		t
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	CAJ2432Z	3/4	R404A	18.3	887	331	285	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	CAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	FH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
	TFH2480Z												
	FH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz
	TFH2511Z												
	TAG2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz
TAGP2516Z													
TAG2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz	
TAGP2522Z													

Picture5 Mbsm Dot Pro : www.mbsm.pro

**THE NEW TWO GENERATION BRAZIL COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)								VOLTAGE		
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature									
					Oil charge (cm <sup>3</sup> )	-20°C	-15°C	-10°C	-5°C	0°C	+5°C		+10°C	+15°C
						t	t	t	t	t	t		t	t
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz	
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz	
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz	
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1688	220-240V/1/50Hz	
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz	

**Tecumseh Compressor**

**LOW BACK PRESSURE COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)						VOLTAGE		
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature							
					Oil charge (cm <sup>3</sup> )	-35°C	-30°C	-25°C	-20°C		-15°C	-10°C
						t	t	t	t		t	t
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro



## Tecumseh Compressor

### MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)			REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)								VOLTAGE
			Refrigerant		Evaporating Temperature								
			Displacement (cm <sup>3</sup> )	Oil charge (cm <sup>3</sup> )	-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C		
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1183	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Category: Solutions,Tester ok

written by Jamila | 23 March 2019

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W , gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W, GML110A 90W, R134a , 220-240V 50HZ

Zel gml200a gml180a gml160g gml140a gml110a r134a Compressors

- gml200a 152W
- GML180A 144W
- gml160g 129W
- gml140a 108W
- GML110A 90W

Place of purchase:  
Mainland China

Brand:  
West of Monza


Color classification:  
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:  
R134a

Voltage:  
220-240V 50HZ

Working conditions:  
Low back pressure



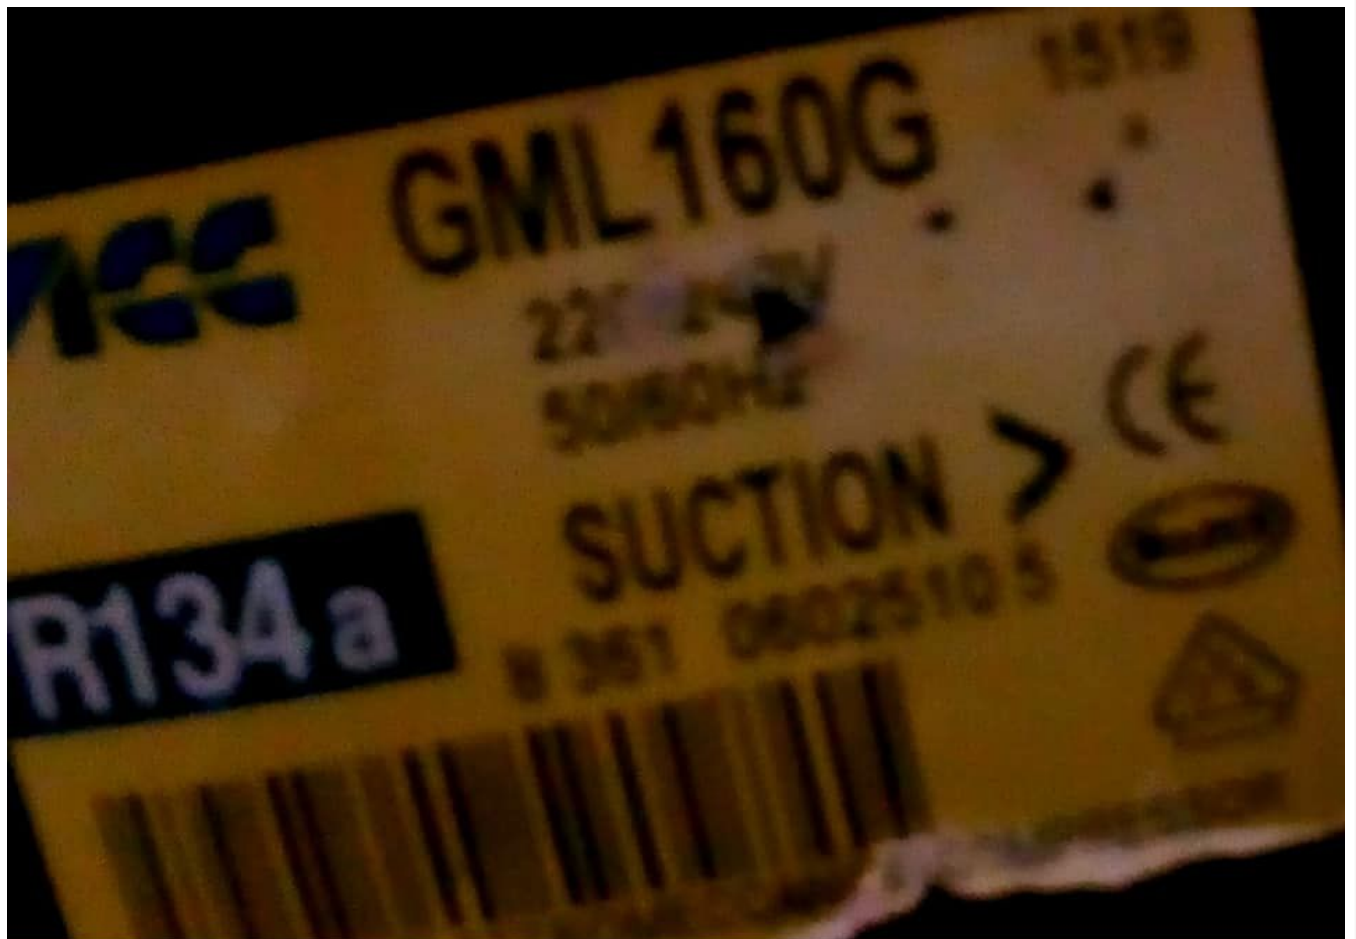

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

---

Mbsm.pro, GTH93AA , compressor  
coolant R134a , 220-240V 50Hz MBP  
9,8kg, 1/4HP++, 1/3 hp- cylinder  
capacity 9,3cm<sup>3</sup>, 260 W,

Category: Solutions, Tester ok

written by Jamila | 23 March 2019

Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz MBP 9,8kg 1/4HP  
cylinder capacity 9,3cm<sup>3</sup>



Importer Name: Digital Design for Appliances Manufacturing  
اسم المستورد: شركة ديجيتال ديزاين لتصنيع الأجهزة الإلكترونية

Importer Address: B3- Lot 120, 10<sup>th</sup> of Ramadan City, Egypt  
عنوان المستورد: قطعة B3 - مدينة العاشر من رمضان - مصر

Exporter Name: VESTEL  
اسم المصدر: فيستيل

Country of Origin: TURKEY  
بلد المنشأ: تركيا

Item Name: Refrigerator (No Frost)  
المنتج: ثلاجة (نوفروست)



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

refrigerant R134a  
 type GTH93AA  
 voltage 220-240 V

**frequency** 50 Hz  
**application** MBP  
**weight** 9,8 kg  
**power** 1/4 HP  
**cylinder capacity** 9,3 cm<sup>3</sup>  
**motor system** RSIR/RSCR  
**height** 184 mm  
**power at -20°C** – W  
**power at -15°C** – W  
**power at -10°C** – W  
**power at -5°C** – W  
**power at 0°C** – W  
**power at +5°C** – W

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger](#)  
[Mbsm\\_dot\\_pro\\_private\\_PDF\\_catalog\\_zelTélécharger](#)

---

## Mbsm.pro, ATA72XL, Lbp compressor, HuaGuang coolant, R134a, 220-240V 50/60Hz, 1/4HP, 1PH, 205 w, Lbp

Category: Solutions, Tester ok

written by Jamila | 23 March 2019

Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a , 220-240V 50/60Hz , 1/4HP , 1PH

Détails rapides

Lieu d'origine:

Guangdong, Chine

Marque:

Wanbao

Type:

Compresseur de réfrigération

Application:

Pièces de réfrigération

Certification:

ce, CCC / CB / VDE

Réfrigérant:

R134A

Marque:

Wanbao

Tension:

220-240V 50HZ

Déplacement:

72 cm<sup>3</sup>

Refroidissement:

ST / OC

Type de moteur:

RSIR

Capacité de refroidissement:

185 W

Capacité:

631 BTU

Max. Hauteur "A":

188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.

La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01

ASD43K R134a	220V / 50Hz117	LBP	1.13
ASD53K R134a	220V / 50Hz144	LBP	1.2
ASD65 R134a	220V / 50Hz173	LBP	1,23
ATA72X R134a	220V / 50Hz205	LBP	1,35
ATA80X R134a	220V / 50Hz230 1/4 hp++	LBP	1,35
ANA90 R134a	220V / 50Hz255	LBP	1,35
AQAW110R134a	220V / 50Hz260	LBP	1,15
ANA120 R134a	220V / 50Hz345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons :

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80
5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement cm <sup>3</sup>	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity		COP		认证 Certification	最大高度“A” Max. Height "A"		
				ASHRAE	CECOMAF	ASHRAE	CECOMAF				
				-23.3°C	-25°C	-23.3°C	-25°C				
				W	Btu	W	W/W			EER	W/W
<b>LBP</b>											
<b>220-240V 50HZ R134a</b>											
<b>T系列 T Series</b>											
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/DE	185/188
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/DE/CE	185/188
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185

Private Picture Copyright : WWW.MBSM.PRO

Mbsm\_dot\_pro\_private\_PDF\_ATA72X-220-240V\_50HZ\_R134A-1Télécharger

T0891150725A0208



 **ATA72XL** 

HUAGUANG 220-240V~50 30Hz 1PH R134a 



**CB**   **A068962** 

THERMALLY PROTECTED  
Wanbao Group Compressor Co., Ltd.

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





REDMI NOTE 8T  
AI QUAD CAMERA



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)





REDMI NOTE 8T  
AI QUAD CAMERA



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Mbsm.pro , GL80AF , ZEM, EGL80AF, Compressors , Hermetic compressors, 220-230V 50/60Hz , 1/5HP , 1PH , HBP, R134A

Category: Solutions, Tester ok

written by Jamila | 23 March 2019

Mbsm.pro , GL80AF , ZEM Compressors , Hermetic compressors, 220-230V 50/60Hz ,  
1/5HP , 1PH , HBP, R134A

GD40AF 1/9 , GL45AF 1/8 , GL60AF. GL60AF, GL70AF , GL70ANa 1/5., GL70AND.  
, GL80AF 1/5.

LBP															
R134a 60 Hz			CECOMAF (W)						ASHRAE		R134a 60 Hz				
			-35	-30	-25		-10	-23.3							
					W	COP		kcal/h	COP						
<b>200-220/220-230V 50/60Hz ~I</b>															
GD30AG	1/12	S	3.08	25	39	57	0.67	130	68	0.88	C	200	5.8	RSIR	P
GD40AF	1/10	S	4.03	35	54	77	0.70	171	91	0.91	C	200	6.8	RSIR	P
GL99BL	1/4	OC	9.93	102	148	204	0.93	434	239	1.21	C	470	11.3	RSCR	P
GL45AF	1/8	S	4.55	41	64	94	0.76	214	111	0.99	C	270	9.0	RSIR	P
GL60AF	1/6	S	5.99	66	94	131	0.81	286	154	1.05	C	270	9.1	RSIR	P
GL70AF	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANa	1/5	S	6.65	80	110	150	0.90	323	175	1.17	C	345	10.1	RSIR	P
GL70ANb	1/5	OC	6.65	80	110	150	0.90	323	175	1.17	C	445	10.4	RSIR	P
GL80AF	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANa	1/5	S	8.10	87	123	172	0.92	384	202	1.19	C	445	10.6	RSIR	P
GL80ANb	1/5	OC	8.10	87	123	172	0.92	384	202	1.19	C	445	10.7	RSIR	P
GL90AF	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANa	1/4	S	9.08	96	134	185	0.93	421	218	1.20	C	445	10.8	RSIR	P
GL90ANb	1/4	OC	9.08	96	134	185	0.93	420	218	1.20	C	445	10.9	RSIR	P
<b>115V 60Hz ~I</b>															
GD24AD	1/20	S	2.42	14	25	40	0.52	99	48	0.70	C	200	5.1	RSIR	P
GD36AD	1/12	S	3.62	30	47	68	0.65	149	80	0.85	C	240	6.1	RSIR	P
GL45ADa	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C	265	8.1	RSIR	P
GL45ADb	1/8	S	4.55	41	65	95	0.80	214	112	1.05	C-V	265	8.1	CSIR	R
GL60ADa	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	265	9.1	RSIR	P
GL60ADb	1/6	S	5.99	64	94	132	0.85	290	155	1.10	C	210	9.1	CSIR	R
GL60BK	1/6	OC	5.99	66	95	132	0.84	290	155	1.10	C	400	10.0	RSCR	P
GL70ADa	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	RSIR	P
GL70ADb	1/5	S	6.65	79	108	148	0.86	322	173	1.12	C	345	9.6	CSIR	R
GL80ADa	1/5	S	8.10	84	121	171	0.87	383	201	1.13	C	345	9.8	RSIR	P
GL80ADb	1/5	S	8.10	84	122	171	0.87	384	201	1.13	C-V	345	9.8	CSIR	R
GL80BK	1/5	OC	8.10	79	119	169	0.85	381	200	1.11	C	470	11.1	RSCR	P
GL90ADa	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	RSIR	P
GL90ADb	1/4	S	9.08	97	138	191	0.88	420	224	1.14	C	445	10.5	CSIR	R





**ZMC**

**EGL80AF** 0609

**R 134 a**



200-220V~50Hz

220-230V~60Hz

MADE IN EGYPT



3 445

0265983





					kcal/h	W	W/W	W/W	W/W	W/W
▶ <input type="checkbox"/>	<a href="#">GL45AA</a>	LBP-R134a	1/8	43	A	96	82	1.06	0.82	
▶ <input type="checkbox"/>	<a href="#">GL45AN</a>	LBP-R134a	1/8	50	C	96	81	1.05	0.8	
▶ <input type="checkbox"/>	<a href="#">GL60AA</a>	LBP-R134a	1/6	43	A	132	114	1.14	0.89	
▶ <input type="checkbox"/>	<a href="#">GL60AF</a>	LBP-R134a	1/6	43	D	132	113	1.07	0.82	
▶ <input type="checkbox"/>	<a href="#">GL60AH</a>	LBP-R134a	1/6	43	A	133	114	1.31	1.01	
▶ <input type="checkbox"/>	<a href="#">GL60AN</a>	LBP-R134a	1/6	50	C	132	114	1.07	0.83	
▶ <input type="checkbox"/>	<a href="#">GL70AA</a>	LBP-R134a	1/5	43	A	149	128	1.18	0.9	
▶ <input type="checkbox"/>	<a href="#">GL70AN</a>	LBP-R134a	1/5	50	D	150	129	1.08	0.83	
▶ <input type="checkbox"/>	<a href="#">GL70AT</a>	LBP-R134a	1/5	43	E	144	122	1.09	0.84	
▶ <input type="checkbox"/>	<a href="#">GL75AA</a>	LBP-R134a	1/5	43	A	155	133	1.18	0.92	
▶ <input type="checkbox"/>	<a href="#">GL80AA</a>	LBP-R134a	1/5	43	A	173	148	1.19	0.93	
▶ <input type="checkbox"/>	<a href="#">GL80AF</a>	LBP-R134a	1/5	43	D	166	141	1.14	0.88	
▶ <input type="checkbox"/>	<a href="#">GL80AH</a>	LBP-R134a	1/5	43	A	175	150	1.35	1.06	
▶ <input type="checkbox"/>	<a href="#">GL80AN</a>	LBP-R134a	1/4	43	A	196	168	1.36	1.06	
▶ <input type="checkbox"/>	<a href="#">GL90AA</a>	LBP-R134a	1/4	43	A	195	167	1.19	0.93	
▶ <input type="checkbox"/>	<a href="#">GL90AH</a>	LBP-R134a	1/4	43	A	215	182	1.39	1.08	
▶ <input type="checkbox"/>	<a href="#">GL90AN</a>	LBP-R134a	1/4	50	D	190	163	1.1	0.85	
▶ <input type="checkbox"/>	<a href="#">GL90AT</a>	LBP-R134a	1/4	43	E	190	163	1.18	0.87	



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

## Données techniques

- Modèle: **GL80AA**
- Gaz réfrigérant: **R-134a**
- Pression / température: **LBP**
- Puissance: **1/5 HP**
- Type de courant: **monophasé**
- Fréquence: **50 Hz**
- Type de compresseur: **hermétique**
- Déplacement: **8,10 cm<sup>3</sup>**
- Consommation d'énergie. Énergie -35 ° C: **117 W**
- Consommation d'énergie. Énergie -25°C: **158 W**
- Consommation d'énergie. Énergie -10 ° C: **237 W**
- T ° Condensation: **40 ° C**
- Capuchon de refroidissement. -35 ° C: **95 Kcal / h**
- Capuchon de refroidissement. -30 ° C: **132 Kcal / h**
- Capuchon de refroidissement. Énergie -25 ° C: **178 Kcal / h**
- Capuchon de refroidissement. -20 ° C: **234 Kcal / h**

- Capuchon de refroidissement. -15 ° C: **300 Kcal / h**
- Capuchon de refroidissement. Énergie -10 ° C: **375 Kcal / h**
- Type de test: **Ashare 32**

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GLy60aaTélécharger](#)

[Mbsm\\_dot\\_pro\\_private\\_PDF\\_GLy60aa-1Télécharger](#)