

Mbsm.pro, compressor, dle5.7cnt ,
Secop, Danfoss, 102H4685, 1/4 hp++,
1/3 hp-, r290

Category: compressor

written by Lilianne | 5 April 2023



Mbsm.pro, compressor, dle5.7cnt , Secop, Danfoss, 102H4685, 1/4 hp++, 1/3 hp-, r290

**Mbsm.pro, DANFOSS, MANEUROP,
ALTERNATOR, COMPRESSOR, Mt80hp4, 6.6
hp, 3ph**

Category: compressor

written by rober us | 5 April 2023

Maneurop

RECIPROCATING COMPRESSOR

MODEL : MT80HP4



SERIAL : JK 2610933



THERMALLY PROTECTED

PROTECTION THERMIQUE



460V 3~ 60 Hz
23 A Max

380-400V 3~ 50 Hz
LR 69 A



TEST

LP 25bar / 363psi



REFRIGERANT: R22

CAUTION Use of hydrocarbons is not approved by the manufacturer
ATTENTION L'utilisation d'hydrocarbures n'est pas autorisée par le fabricant
BEWACHTUNG Keine Herstellerfreigabe für Kohlenwasserstoffe

LUBRICANT:

Danfoss MINERAL OIL. 160 P

Danfoss Maneurop S.A.
CORPORATION COMPRESSORS
MADE IN FRANCE

DANFOSS MANEUROP ALTERNATOR COMPRESSOR

AIR DRYER

Type	FD1000 USD A	Serial nr	APF138497		
Weight	560 kg	V	50 Hz	5,1 kW	Ph
Comp air Pmax	12 bar(e)	Tmax	55 °C		
Ambient: Max	45 °C	Min	0 °C		
Refr. type:	R404 A	Amount	0 kg		
Refr. Pmax high	29 bar	Pmax low	20 bar		
Year of construction	20 08				
MADE BY ATLAS COPCO AIRPOWER n.v. WILRIJK BELGIUM					


1617 4483 00

CE 0038

Atlas Copco



Private Picture Copyright : WWW.MBSM.PRO

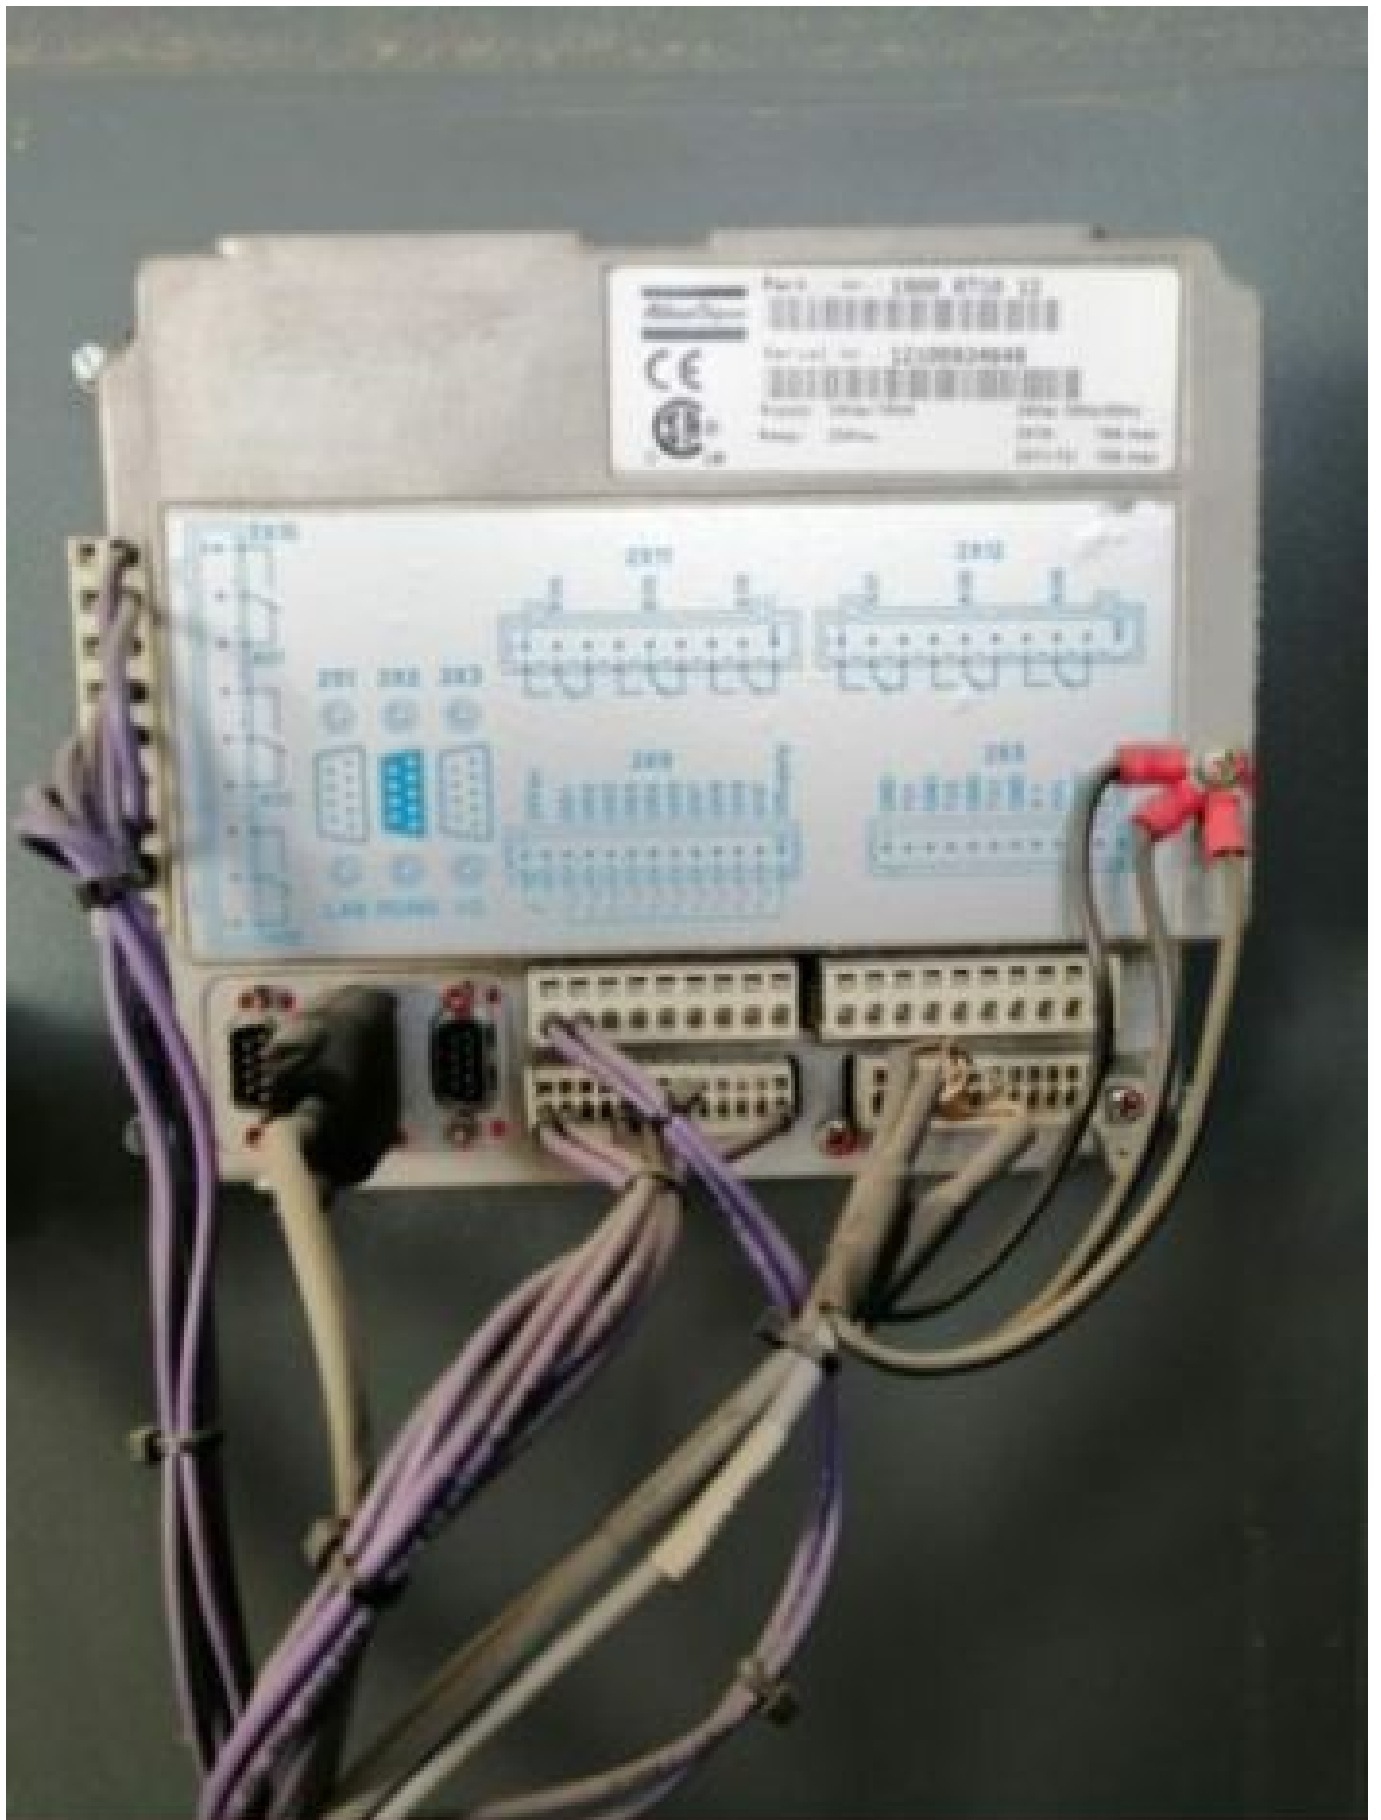

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Maneurop

RECIPROCATING COMPRESSOR

MODEL : MT80HP4

SERIAL : JK 2610933



THERMALLY PROTECTED

PROTECTION THERMIQUE

450V 3~ 50 Hz
23 A Max

380-400V 3~ 50 Hz
LR 69 A



REF. 100 / 1000

REFRIGERANT: R22



Lubrifiant
Lubrifiant
Lubrifiant

LUBRIFIANT

MINERAL OIL 150 P

Centross Maneurop S.A.

Private Picture Copyright : WWW.MBSM.PRO

Model (mineral oil R22; polyolester oil R134A, R404) (MT, MTZ, NTZ SERIES)

Danfoss Maneurop MT22JC5PVE Piston Compressor (2.0HP / 1PH); [R22]
Danfoss Maneurop MT22JC4AVE piston compressor (2.0HP / 3PH); [R22]
Danfoss Maneurop MT28JC5PVE AC Compressor (2.3HP/1PH); [R22]
Danfoss Maneurop MT28JE4AVE AC Compressor (2.3HP/3PH); [R22]
Danfoss Maneurop MT32JF5MVE AC Compressor (2.6HP/1PH); [R22]
Danfoss Maneurop MT32JF4DVE AC Compressor (2.6HP/3PH); [R22]
Danfoss Maneurop MT36JG5CVE AC Compressor (3.0HP/1PH); [R22]
Danfoss Maneurop MT36JG4FVE AC Compressor (3.0HP/3PH); [R22]
Danfoss Maneurop MT40JH4EVE AC Compressor (3.3HP/3PH); [R22]
Danfoss Maneurop MT44HJ4BVE reciprocating compressor (3.6HP / 3PH); [R22]
Danfoss Maneurop MT50HK4CVE Piston Compressor (4.0HP/3PH); [R22]
Danfoss Maneurop MT56HL4BVE AC Compressor (4.6HP/3PH); [R22]
Danfoss Maneurop MT64HM4DVE AC Compressor (5.3HP/3PH); [R22]
Danfoss Maneurop MT72HN4AVE AC Compressor (6.0HP/3PH); [R22]
Danfoss Maneurop MT80HP4AVE AC Compressor (6.6HP/3PH); [R22]
Danfoss Maneurop MT100HS4DVE AC Compressor (8.3HP / 3PH); [R22]
Danfoss Maneurop MT125HU4DVE Reciprocating Compressor (10.0HP/3PH); [R22]
Danfoss Maneurop MT144HV4AVE Reciprocating Compressor (12.0HP/3PH); [R22]
Danfoss Maneurop MT160HW4EVE AC Compressor (13.3HP/3PH); [R22]Danfoss Maneurop
MTZ22JC5VE AC Compressor (2.0HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ22JC4AVE AC Compressor (2.0HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ28JE5AVE AC Compressor (2.3HP / 1PH); [R134A, R404]
Danfoss Maneurop MTZ28JE4AVE AC Compressor (2.3HP / 3PH); [R134A, R404]
Danfoss Maneurop MTZ32JF5AVE AC Compressor (2.6HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ32JF4BVE Reciprocating Compressor (2.6HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ36JG5AVE AC Compressor (3.0HP/1PH); [R134A, R404]
Danfoss Maneurop MTZ36JG4BVE Reciprocating Compressor (3.0HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ40JH4AVE reciprocating compressor (3.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ50HK4CVE Reciprocating Compressor (4.0HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ56HL4BVE Reciprocating Compressor (4.6HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ64HM4CVE Reciprocating Compressor (5.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ72HN4AVE Reciprocating Compressor (6.0HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ80HP4AVE Reciprocating Compressor (6.6HP/3PH); [R134A, R404]
Danfoss Maneurop MTZ100HS4VE Reciprocating Compressor (8.3HP / 3PH); [R134A,
R404]
Danfoss Maneurop MTZ125HU4VE Reciprocating Compressor (10.0HP/3PH); [R134A,
R404]
Danfoss Maneurop MTZ144HV4AVE Reciprocating Compressor (12.0HP/3PH); [R134A,
R404]
Danfoss Maneurop MTZ160HE4AVE AC Compressor (13.3HP/3PH); [R134A, R404]
Danfoss Maneurop NTZ048A4LR1A Reciprocating Compressor (2.0HP / 3PH); [R134A,
R404, R507]
Danfoss Maneurop NTZ068A4LR1A Reciprocating Compressor (3.5HP / 3PH); [R134A,
R404, R507]

Danfoss Maneurop NTZ096A4LR1A Reciprocating Compressor (4.5HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ108A4LR1A AC Compressor (5.0HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ136A4LR1A Reciprocating Compressor (6.5HP / 3PH); [R134A, R404, R507]


Danfoss Maneurop NTZ215A4LR1A Reciprocating Compressor (10.0HP / 3PH); [R134A, R404, R507]

Danfoss Maneurop NTZ271A4LR1A Piston Compressor (13.0HP / 3PH); [R134A, R404, R507]

Mbsm.pro, Danfoss, Scroll,
Compressors, HRH, HLH, HLJ, R410A,
6hp, HLJ072T5LP6, HLJ075T5LP6,
HLJ083T5LP6, 3 ph, 380 v

Category: compressor

written by Lilianne | 5 April 2023

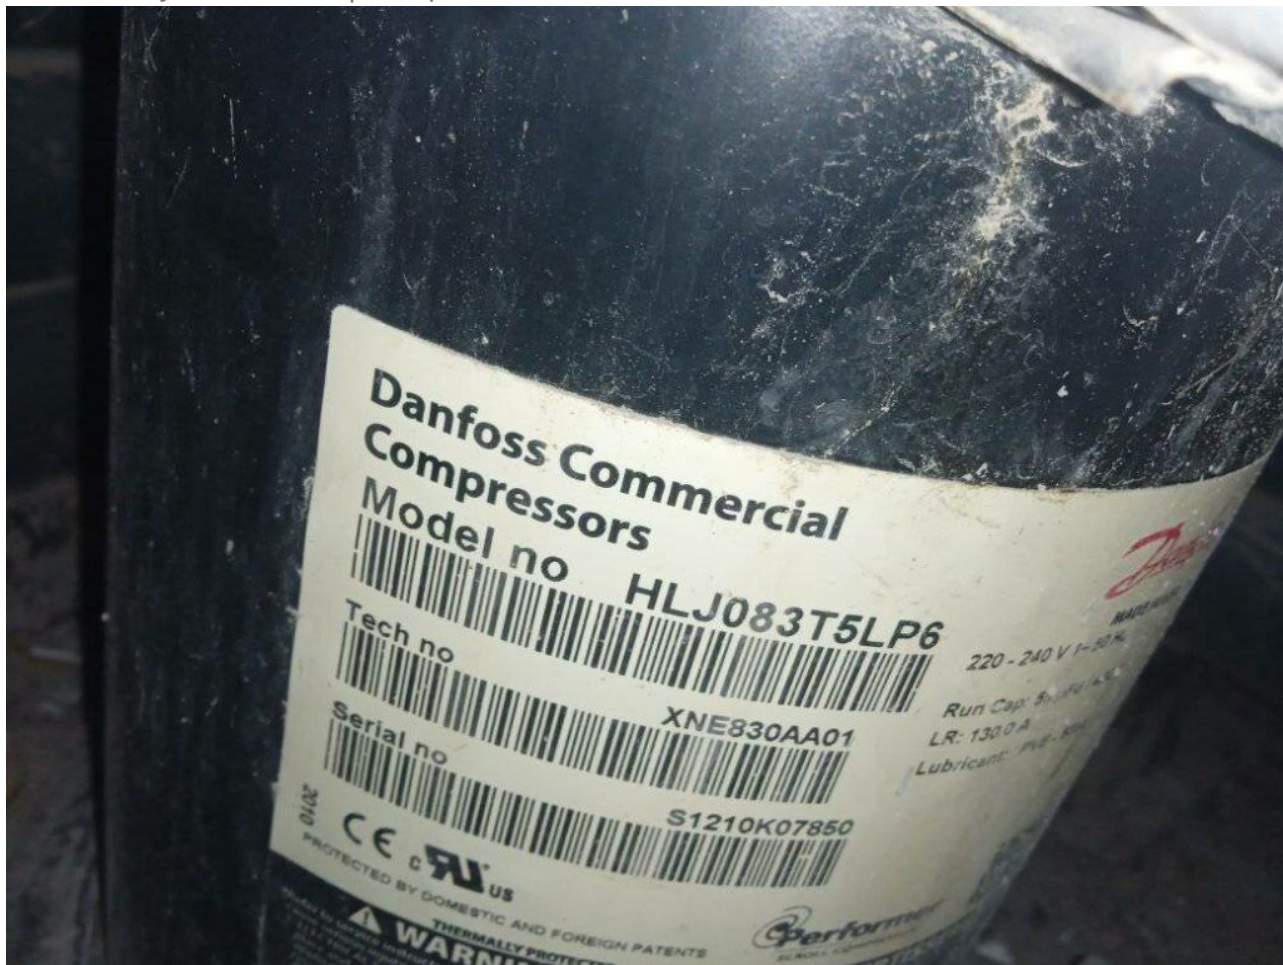



Norme d'approbation

CE
-UL

Résistance de l'enroulement auxiliaire (enroulement de démarrage) pour les compresseurs monophasés [Ohm]

1,02 ohm

Technique de la marque

Compresseur scroll

Contrôle de capacité

Vitesse fixe

Capacité du condensateur A

55 µF

Capacité du condensateur B

88-108 µF

Couleur

Noir

Alimentation du compresseur [V/Ph/Hz]

220-240/1/50

Code de configuration

Seul

Type de connexion

Brasé

La description

HLJ083T5

Diamètre [mm]

184 millimètres

Hauteur de raccordement de refoulement [mm]

422 millimètres

Taille du tuyau de raccordement de décharge [po]

1/2 po

Taille de la connexion de décharge [po]

1/2 po

Numéro de dessin

0XR6002B-2

Économiseur

Non

Norme de montage

FDAL

Fréquence [Hz]

50

Orifice manomètre HP

Aucun

Orifice de jauge LP

Aucun

Égalisation gaz

Aucun

Montage sur verre

Aucun

Pression max côté haut (Ps)

46,1 bars

Valeur haute de la tension nominale à 50Hz [V]	230V
Valeur haute de la tension nominale à 60Hz [V]	0V
Valeur élevée de la plage de tension à 50 Hz [V]	253V
Valeur élevée de la plage de tension à 60 Hz [V]	0V
Classe de protection IP	IP22
Longueur [mm]	239 millimètres
Pression max côté bas (Ps)	31,1 bars
Basse valeur de la tension nominale à 50Hz [V]	230V
Basse valeur de la tension nominale à 60Hz [V]	0V
Valeur basse de la plage de tension à 50 Hz [V]	207V
Valeur basse de la plage de tension à 60 Hz [V]	0V
LRA	130 A
Résistance de l'enroulement principal pour les compresseurs monophasés [0hm]	0,39 ohm
CMC	50 A
Numéro de modèle	HLJ083T5LP6
Protection moteur	Protecteur de surcharge interne
Puissance frigorifique nominale à 50Hz	17,3kW
Puissance calorifique nominale à 50Hz	11,3kW
Charge d'huile [L]	1,57L
Vidange d'huile	Aucun
Égalisation d'huile	Aucun
Référence huile	320HV
Type d'huile	PVE
Forme d'emballage	Paquet individuel/palette
Quantité d'emballage	16
Phase	1
Connexions électriques	Bêche
Réfrigérant	R410A
Charge de réfrigérant [kg] [Max]	5,44 kilogrammes
Modèle de relais	3ARR3*25AS*
Soupape de décharge	Oui
RLA	32 A
Vitesse de rotation à 50 Hz [tr/min]	2900 tr/min
Vitesse de rotation à 60 Hz [tr/min]	0 tr/min
Utilisation des segments	Climatisation
Instructions expédiées	Instructions d'installation
Montage livré	Kit de montage avec œillets et manchons
Pétrole expédié	Charge d'huile initiale
Hauteur du raccord d'aspiration [mm]	280 millimètres
Taille du tuyau de raccordement d'aspiration [po]	7/8 po
Taille du raccord d'aspiration [in]	7/8 po
Volume balayé [cm ³]	78,08 cm ³
Technologie	Faire défiler

Hauteur totale [mm]	455 millimètres
Taper	HLJ
Désignation de type	Compresseur
Viscosité [cP]	68 cP
Tension du condensateur A [V]	440V
Tension du condensateur B [V]	330V
Largeur [mm]	239 millimètres

Danfoss Scroll Compressors HRH, HLH, HLJ

MODEL DANFOSS	CODE DANFOSS M-PACK	REFRI-GERANT	VOLTAGE	Cond. t° +45°C and Nominal capacity at 50Hz	POWER INPUT (Kw)	Swept Volume DISPL. sm ³ /r	Displ. m ³ /h
				R410 EVAPORATING TEMPERATURE °C (BTU/HR) 7,2°C 50Hz			
HRH031U4LP6	120U1191	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	29484	2,67	29,8	5,19
HRH031U5LP6	120U1166	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	29484			
HRH032U4LP6	120U1196	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	29942	2,75	30,6	5,33
HRH032U5LP6	120U1171	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	29942			
HRH036U4LP6	120U1201	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	34493	3,13	34,7	6,04
HRH036U5LP6	120U1176	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	34493			
HRH038U4LP6	120U1206	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	36353	3,35	36,5	6,36
HRH038U5LP6	120U1181	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	36353			
HRH040U4LP6	120U1211	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	39789	3,58		-
HRH040U5LP6	120U1186	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	39789			
HRH041U4LP6	120U1356	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	39077			
HRH044U4LP6	120U1361	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	42309	3,92	42,6	7,41
HRH049U4LP6	120U1366	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	47079	4,04	47,4	8,24
HRH051U4LP6	120U1371	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	50057	4,21	49,3	8,58
HRH051U5LP6	120U1326	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	50057			
HRH054U4LP6	120U1376	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	52103	4,41	52,1	9,07
HRH054U5LP6	120U1331	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	52103			

HRH056U4LP6	120U1381	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	53997	4,58	54,1	9,42
HRH056U5LP6	120U1336	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	53997			
HLH061T4LC6	120U2052	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	57408	4,89	57,8	10,10
HLH068T4LC6	120U1391	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	65244	5,26	64,4	11,21
HLH068T5LP6	120U1341	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	65244			
HLJ072T4LC6	120U1396	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	68892			
HLJ072T5LP6	120U1346	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	68028	6,09		-
HLJ083T4LC6	120U1401	R410A	380-400V/3~/50Hz & 460V/3~/60Hz	79393			
HLJ083T5LP6	120U1351	R410A	220-240V/1~/50Hz & 265V/1~/60Hz	77059	7,02		-

Mbsm.pro, Danfoss, compressors, R134a, medium, temperature, HMBP

Category: compressor

written by Jamila | 5 April 2023




Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Danfoss, compressors, R134a, medium, temperature, HMBP

Mbsm.pro, Danfoss, Reciprocating,
compressor, NLX11KK.2, 105H6971,
NLX11KK.2 105H6971, 1/4 hp++, 1/3
hp-, r600a

Category: compressor

written by mahdi miled | 5 April 2023



			-35	-30	-20	-15	-10	-5	0	5	[W]	[W/W]	[W/W]	[W]	[kcal/h]	[W/W]	[kcal/Wh]		
Energy-optimized	1.	PLE35K	101H0360		38	52	68	87	109		27		0.68	38	33				
		TLES4KK.3	102H4438	19	29	57	75	96				42	0.90		57	49	1.18		
		TLES4.8KK.3	102H4538	28	40	73	94	119				55	1.00		74	65	1.30		
	2.	TLES5.7KK.3	102H4638	36	50	89	114	144				68	1.02		91	79	1.32		
		TLES6.5KK.3	102H4738	45	61	105	134	168				81	1.02		108	94	1.31		
		TLES7.5KK.3	102H4838	53	71	122	155	194				94	1.02	1.07	126	108	1.32	1.14	
	3.	TLES8.7KK.3	102H4938	62	83	143	181	228				110	1.03	1.08	147	126	1.33	1.14	
		TLES10KK.3	102H4038									130	1.04		172	148	1.35	1.15	
		NLE8.8KK.4	105H6800	63	84	141	179	223				110	1.18	1.22	147	127	1.51	1.30	
	4.	NLE10KK.4	105H6867	74	98	164	207	257				128	1.19	1.23	170	151	1.51	1.30	
		NLE11KK.4	105H6952	82	109	184	232	290				143	1.19	1.22	191	165	1.52	1.31	
		NLE13KK.4	105H6959	99	131	217	274	340				170	1.18	1.23	226	194	1.50	1.29	
	High Energy-optimized	1.	NLE15KK.4	105H6968	110	146	243	307	382				190	1.20	1.25	253	213	1.53	1.32
			TLY4 KK.3	102H4442	19	29	57	74	95				42	0.96	0.99	57	49	1.26	1.08
			TLY4.8KK.3	102H4542	28	40	73	94	119				55	1.04	1.06	74	65	1.35	1.16
2.		TLY5.7KK.3	102H4642	36	51	89	114	144				68	1.03	1.06	91	79	1.33	1.15	
		TLY6.5KK.3	102H4742	46	62	106	135	170				82	1.10	1.14	110	94	1.42	1.22	
		TLY7.5KK.3	102H4842	53	71	122	155	194				94	1.09	1.14	126	108	1.41	1.22	
3.		TLY8.7KK.3	102H4942	65	86	144	182	227				112	1.12	1.16	149	126	1.44	1.24	
		TLX4KK.3	102H4447	21	32	59	76	95				45		1.15***	60	52			
		TLX4.8KK.3	102H4547	36	52	90	116	146				57		1.24***	76	65			
4.		TLX5.7KK.3	102H4647	37	52	91	115	143				70		1.28***	93	80			
		TLX6.5KK.3	102H4747	46	63	106	133	165				83		1.30***	110	95			
		TLX7.5KK.3	102H4847	55	75	125	157	195				98		1.32***	130	112			
1.		TLX8.7KK.3	102H4947	65	88	146	184	227				115		1.31***	152	131			
		NLX8.8KK	105H6874	60	83	144	182	227				111		1.35	148	127			
		NLX10KK	105H6871	74	100	169	215	269				131		1.36	174	150			
2.	NLX11KK	105H6984	84	112	189	240	300				147		1.36	195	168				
	NLX13KK	105H6983	98	133	223	282	350				174		1.36	231	199				
	NLX15KK	105H6981	110	147	249	317	397				193		1.34	257	221				
1.	NLX8.0KK.2	105H6010	52	73	130	167	210				99		1.47***	133	115				
	NLX8.8KK.2	105H6011	62	85	147	187	234				113		1.49***	151	130				
	NLX10KK.2	105H6101	75	101	171	217	271				133		1.49***	178	153				
2.	NLX11KK.2	105H6971	86	115	192	242	301				150		1.49***	200	172				

Private Picture Copyright : WWW.MBSM.PRO

Description

Product details

Gross weight 12.47 kg

Net weight 12.47 kg

Gross weight 12.47 kg

Net weight 12.47 kg

Application energy level

Applications

Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]

Base plate type

Brand technique

Capacity control

Colour

Compressor power supply [V/Ph/Hz]

Configuration code

Cut in current LST [A]

Description

Discharge connection angle [°]

Discharge connection comments

Discharge connection diameter [mm]

Discharge connection material

Economizer

Free gas volume [cm3]

High Energy-optimized

LBP

31.8 Ohm

EU small

Reciprocating compressor

Fixed speed

Black

220-240/1/50

Single

6.4 A

NLX11KK.2

21 °

Al-cap

5 mm

Cu-plated steel

No

2360 cm3

Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm ³]	270 cm ³
Oil type	POE
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °
Suction connection comments	Al-cap
Suction connection diameter [mm]	6.2 mm
Suction connection material	Cu-plated steel
Swept volume [cm ³]	11.15 cm ³
Technology	Reciprocating
Total height [mm]	203 mm
Type	NL
Type designation	Compressor
Voltage 50Hz [V]	220 V
Voltage 50Hz [V] [Max]	240 V
Width [mm]	166 mm
Winding temperature short term [°C] [Max]	110 °C
Winding temperature stat [°C] [Max]	95 °C
Application energy level	High Energy-optimized
Applications	LBP

Auxiliary winding resistance (start winding) for single-phase compressors alt [Ohm]	31.8 Ohm
Base plate type	EU small
Brand technique	Reciprocating compressor
Capacity control	Fixed speed
Colour	Black
Compressor power supply [V/Ph/Hz]	220-240/1/50
Configuration code	Single
Cut in current LST [A]	6.4 A
Description	NLX11KK.2
Discharge connection angle [°]	21 °
Discharge connection comments	Al-cap
Discharge connection diameter [mm]	5 mm
Discharge connection material	Cu-plated steel
Economizer	No
Free gas volume [cm ³]	2360 cm ³
Frequency [Hz]	50
Height from baseplate [mm]	197 mm
High value of nominal voltage at 50Hz [V]	240 V
High value of voltage range at 50Hz [V]	255 V
Length [mm]	252 mm
Liquid injection	No
Low value of nominal voltage at 50Hz [V]	220 V
Low value of voltage range at 50Hz [V]	187 V
LRA LST [A]	3.5 A
Main winding resistance for single-phase compressors [Ohm]	18.5 Ohm
Model number	NLX11KK.2
Motor type	RSCR
No. of phases (compressor)	1
Oil quantity [cm ³]	270 cm ³
Oil type	POE
Packing format	Industrial pack
Packing quantity	80
Process connection angle [°]	25 °
Process connection comments	Al-cap
Process connection diameter [mm]	6.2 mm
Process connection material	Cu-plated steel
Refrigerant	R600a
Refrigerant charge [kg] [Max]	0.15 kg
RLA	0.70 A
Rotational speed at 50Hz [rpm]	3000 rpm
Run capacitor capacitance	2 µF
Segment usage	Refrigeration LT
Speed Platform	Fixed-speed
Suction connection angle [°]	2 °

Suction connection comments Al-cap
 Suction connection diameter [mm] 6.2 mm
 Suction connection material Cu-plated steel
 Swept volume [cm³] 11.15 cm³
 Technology Reciprocating
 Total height [mm] 203 mm
 Type NL
 Type designation Compressor
 Voltage 50Hz [V] 220 V
 Voltage 50Hz [V] [Max] 240 V
 Width [mm] 166 mm
 Winding temperature short term [Â°C] [Max] 110 Â°C
 Winding temperature stat [Â°C] [Max] 95 Â°C
 Refrigerant: R600a, Segment usage: Refrigeration LT, Compressor power supply [V/Ph/Hz]: 220-240/1/50

		-35	-30	-20	-15	-10	-5	0	5	(W)	(kW)	(kW)	(W)	(kcal/h)	(kW)	(kcal/h)
Energy-optimized	PLE3K	12140380								27	0.08	38	33			
	TLK3K.3	12204438	19	29	57	75	96			42	0.90	57	49	1.18		
	TLK3K.3	12204438	28	40	73	94	119			55	1.00	74	65	1.30		
	TLK3K.3	12204438	36	50	89	114	144			68	1.02	91	79	1.32		
	TLK3K.3	12204739	45	61	105	134	168			81	1.02	108	94	1.31		
	TLK3K.3	12204839	53	71	122	155	194			94	1.02	126	109	1.32	1.14	
	TLK3K.3	12204938	62	82	143	181	228			110	1.03	147	126	1.33	1.14	
	TLK3K.3	12204938								130	1.04	172	148	1.35	1.15	
	NLX3K.4	12304800	61	84	141	179	223			110	1.18	147	127	1.31	1.30	
	NLX3K.4	12304807	74	99	164	207	257			128	1.19	170	151	1.31	1.30	
	NLX3K.4	12304952	82	108	184	232	290			143	1.19	181	165	1.32	1.31	
	NLX3K.4	12304959	99	131	217	274	340			170	1.18	226	194	1.30	1.29	
High Energy-optimized	NLX3K.4	12304968	110	146	243	307	382			190	1.20	253	219	1.33	1.32	
	TLV3K.3	12204442	19	29	57	74	91			42	0.90	57	49	1.20	1.08	
	TLV3K.3	12204542	28	40	73	94	119			55	1.04	74	65	1.35	1.16	
	TLV3K.3	12204642	36	51	89	114	144			68	1.03	91	79	1.33	1.15	
	TLV3K.3	12204742	46	62	106	135	170			82	1.10	110	94	1.42	1.22	
	TLV3K.3	12204842	53	71	122	155	194			94	1.00	126	109	1.41	1.22	
	TLV3K.3	12204942	65	86	144	182	227			112	1.12	149	126	1.44	1.24	
	TLK3K.3	12204447	21	32	59	76	95			45	1.10***	60	52			
	TLK3K.3	12204547	36	52	90	116	146			57	1.24***	76	65			
	TLK3K.3	12204647	47	62	101	127	163			70	1.28***	93	80			
	TLK3K.3	12204747	46	63	106	133	165			83	1.30***	110	95			
	TLK3K.3	12204847	55	75	125	157	195			98	1.32***	130	112			
TLK3K.3	12204947	65	88	146	184	237			115	1.35***	152	131				
NLX3K.4	12304874	60	83	144	182	227			111	1.35	148	127				
NLX3K.4	12304871	74	100	169	215	269			131	1.36	174	150				
NLX3K.4	12304984	84	112	189	240	300			147	1.38	195	168				
NLX3K.4	12304982	98	133	223	282	350			174	1.36	231	199				
NLX3K.4	12304981	110	147	249	317	397			193	1.34	257	221				
NLX3K.3	12304870	52	70	120	167	210			99	1.40***	133	115				
NLX3K.3	12304811	62	85	147	187	234			113	1.40***	151	130				
NLX3K.3	12304810	75	101	171	217	271			133	1.40***	178	153				
NLX3K.3	12304871	86	111	192	242	301			150	1.40***	200	172				

Mbsm.pro, Compressor, nf10fx, Danfoss, 1/3 hp, LBP, MBP, 1046 btu, 115 v

Category: compressor
 written by Jamila | 5 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, nf10fx, Danfoss, 1/3 hp, LBP, MBP, 1046 btu, 115 v

Mbsm.pro, Compressor, NLE12.6MF.2, SECOP, 105G6387, DANFOSS, R134a, 1/2 Hp, 1bp

Category: compressor

written by Lilianne | 5 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, NLE12.6MF.2, SECOP, 105G6387, DANFOSS, R134a, 1/2 Hp, 1bp

Compressor DANFOSS NL8.4CLX 105F3800 0.25 hp

Category: compressor

written by Lilianne | 5 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, DANFOSS, 1/4 hp, R404a/R507, NL8.4CLX, LBP, 105F3800

Mbsm.pro, compressor, nly12ng, 1/2
hp–, 3/8 hp++, r290, 12,55cm³, LBP,
230V, Secop, Danfoss, CUBIGEL

Category: compressor

written by Lilianne | 5 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, nly12ng, 1/2 hp-, 3/8 hp++, r290, 12,55cm³, LBP, 230V, Secop, Danfoss

Mbsm.pro, Compressor, NL6.1FT, SECOP, 105G6620, DANFOSS, 1/6 hp, Lbp

Category: compressor

written by Lilianne | 5 April 2023



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, NL6.1FT, SEC0P, 105G6620, DANFOSS, 1/6 hp, Lbp