

**MBSM.PRO , Zel Compressors  
,Low back pressure, gml200a  
152W , gml200a 152W, GML180A  
144W, gml160g 129W, gml140a  
108W, GML110A 90W, R134a ,  
220-240V 50HZ**

written by Jamila | 10 October 2018

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W ,  
gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W,  
GML110A 90W, R134a , 220-240V 50HZ

**Zel gml200a gml180a gml160g  
gml140a gml110a r134a  
Compressors**

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:  
Mainland China

Brand:

West of Monza

Color classification:

gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:

R134a


Voltage:

220-240V 50HZ

Working conditions:

Low back pressure



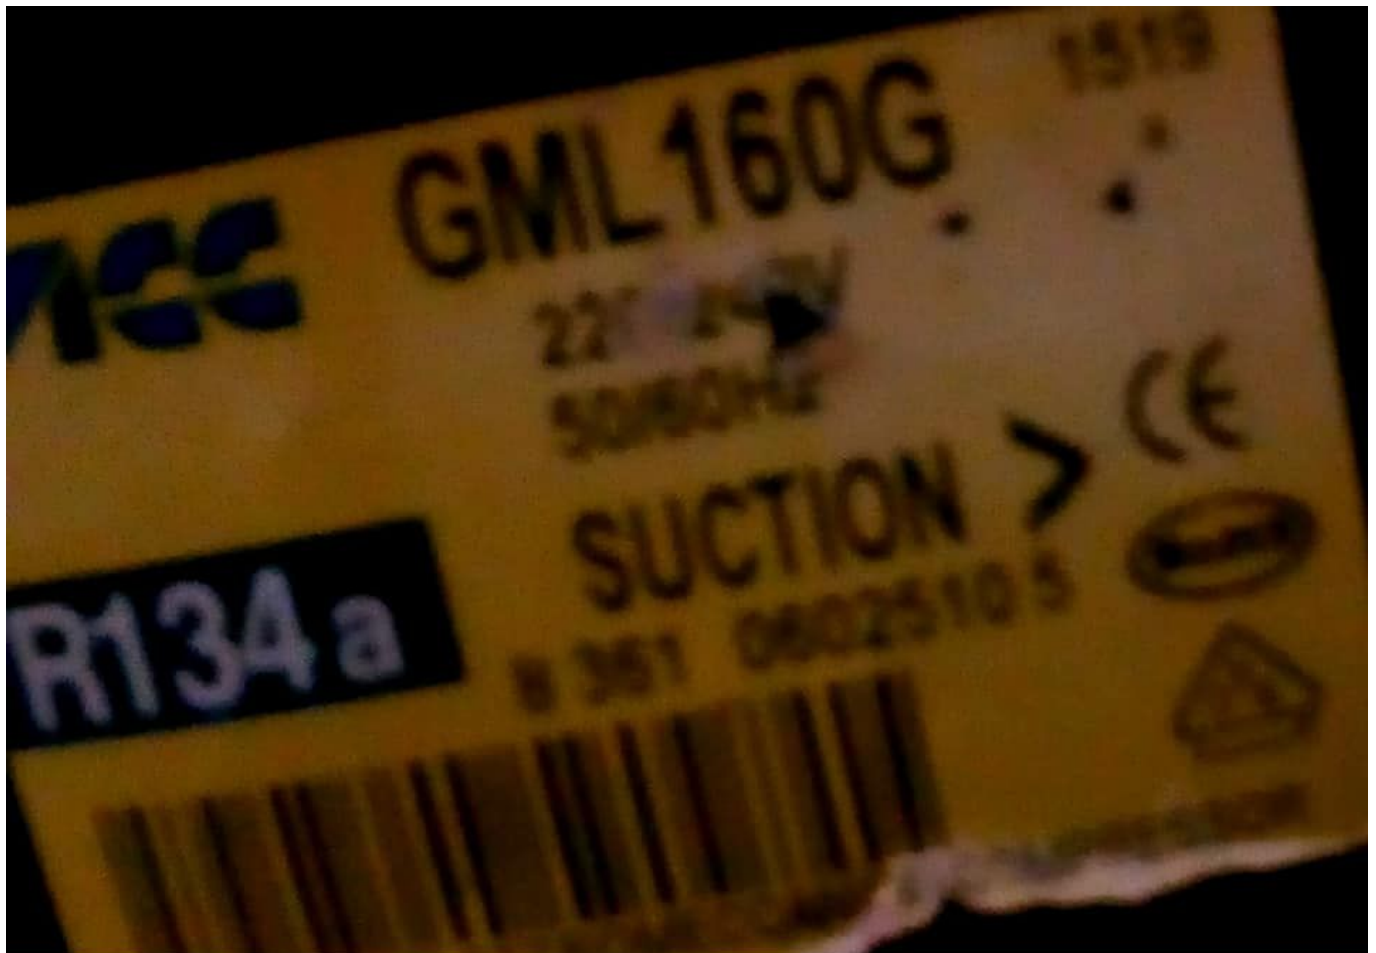

Picture5 Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

---

**MBSM.PRO , Compressor,  
Electrolux-Zem GL60AA R134A  
,1/6 HP , 1PH , 220-240 V 50  
Hz**

written by Jamila | 10 October 2018

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP ,  
1PH , 220-240 V 50 Hz



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm<sup>3</sup>
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d'utilisation max. 32°C
- Avec boîtier et système de démarrage

La photo montre l'aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z



**ZEM**

**R 134a**

GL

CE

BEAB  
Approved

220-240V

3 25

OH



012



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



Mbsm\_dot\_pro\_private\_PDF\_GL60AATélécharger  
 Mbsm\_dot\_pro\_private\_PDF\_-GL60AATélécharger



**Type: Hermetic piston compressors**  
**Producer: ACC**  
**Series: HMBP**  
**Model: GL60AA**

**General data**

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

**Compressor's data**

Cylinder capacity [cm <sup>3</sup> ]:	6
Displacement [m <sup>3</sup> /h]:	1
Weight [kg]:	9,1
Oil charge [cm <sup>3</sup> ]:	265

Oil type:	ISO VG 19 ESTER
-----------	-----------------

### Engine's data

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	9,9
Running winding resistance (25°C) [Ω]:	15,6
Starting winding resistance (25°C) [Ω]:	21,31

### Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

### Connections

	millimeters	inches
Suction tube:	6,5	
Service tube:	6,5	
Discharge tube:	4,9	