


# refrigerator compressor, LBP, 1/6Hp, GFF44AA, GFF75AA, R134a, 220-240V~50Hz , RSIR, 130W , 0.65A, Cop: 1.31, Oil charge: 200ml, Compresseurs hermétiques Siberia

written by Lilianne | 24 December 2020

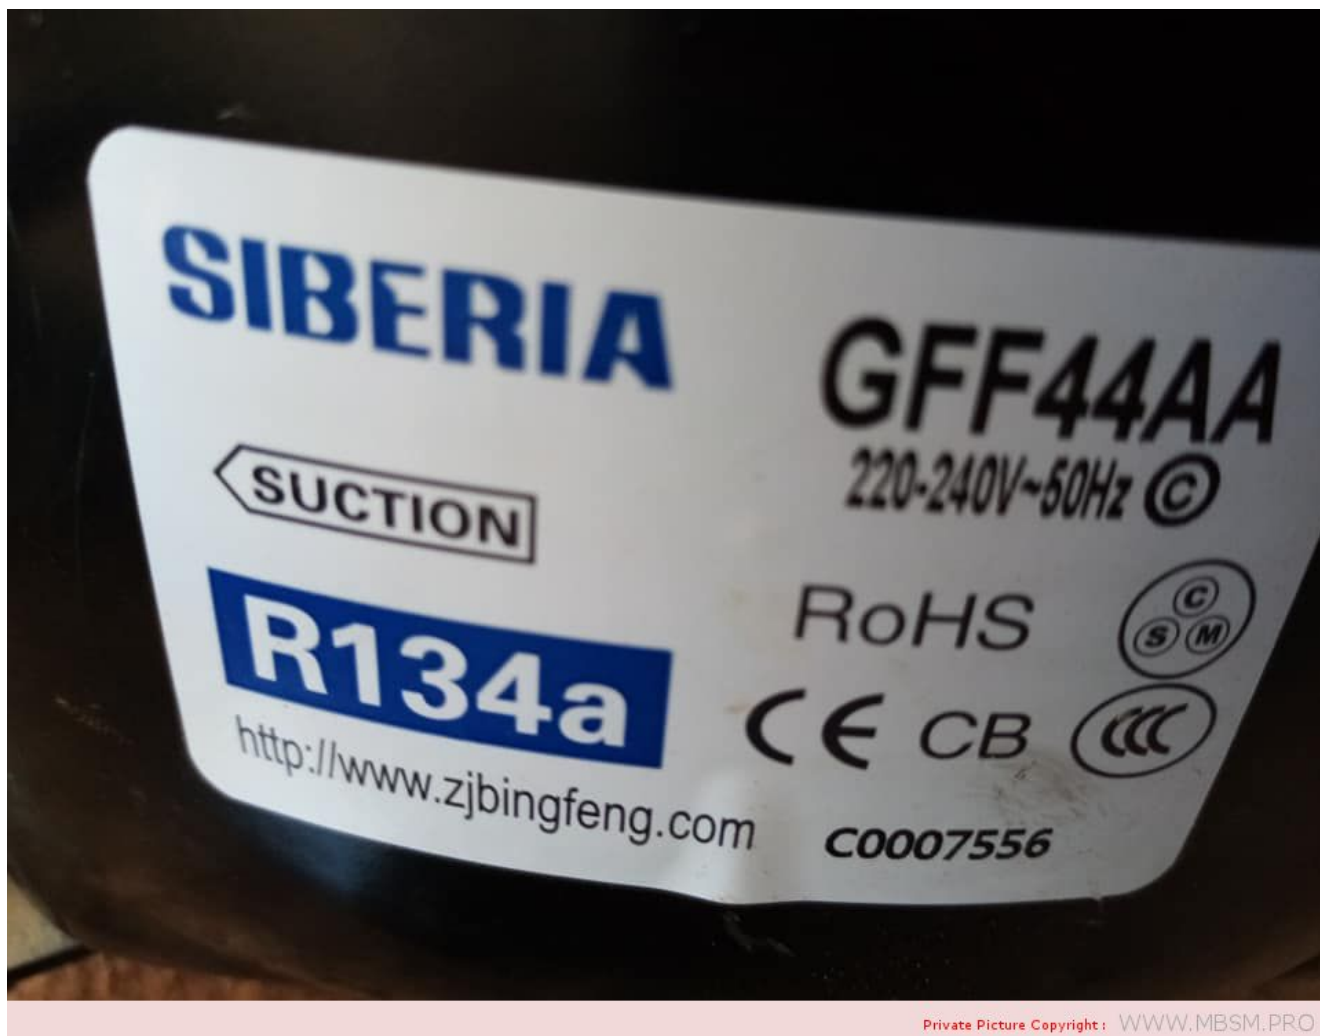

Private Picture Copyright : WWW.MBSM.PRO

Modèle	Puissance Hp	Déplacemen t	Capacité de refroidissem ent	Type de moteur	La puissance d'entrée	Courant évalué	FLIC
GFM44AA	1/6	4.6	120	RSIR	100	0,70	1,20
GFM53AA	1/6 +	5,3	145	RSIR	114	0,88	1,27

GFM57AA	1/5	5,7	165	RSIR	132	0,97	1,25
GFM75AA	1/4 +	7,5	215	RSIR	159	1,20	1,35
GFM10AA	1/3 +	10,0	295	RSIR	220	1,55	1,34
GFM12AA	1 / 2-	12,0	330	RSIR	235	1,85	1,40
GFM12AA_S	1 / 2-	12,0	330	RSIR	235	1,85	1,40

### Série F (F) 220-240V / 50Hz

GFF44 AA	1/6	4.6	130	RSIR / RSCR	99/93	0,65 / 0,53	1,31 / 1,40
GFF57 AA	1/5	5,7	165	RSIR / RSCR	115/110	0,77 / 0,57	1,43 / 1,50
GFF66 AA	1/4	6,6	195	RSIR / RSCR	143/129	0,92 / 0,74	1,36 / 1,51
GFF75 AA	1/4 +	7,5	215	RSIR / RSCR	156/147	1,15 / 0,83	1,38 / 1,46
GFF86 AA	1/3	8,6	250	RSIR / RSCR	179/164	1,24 / 0,90	1,40 / 1,52
GFF93 AA	1/3 +	9,3	270	RSIR / RSCR	185/175	1,25 / 0,95	1,46 / 1,54

### Compresseur haute efficacité série F (T) 220-240V / 50Hz

GFT36A A	1/7	3,6	110	RSCR	68	0,32	1,62
GFT44A A	1/6	4.4	130	RSCR	81	0,43	1,60
GFT53A A	1 / 5-	5,3	145	RSCR	96	0,53	1,50
GFT57A A	1/5	5,7	165/168	RSCR	104/98	0,55 / 0,49	1,60 / 1,70
GFT61A A	1/5 +	6.1	182	RSCR	107	0,53	1,70
GFT66A A	1/4	6,6	195	RSCR	115/113	0,58 / 0,55	1,68 / 1,72

GFT75A A	1/4 +	7,5	220	RSCR	129	0,69	1,70
GFT86A A	1/3	8,6	250	RSCR	148	0,73	1,70
GFT93A A	1/3 +	9,3	270	RSCR	166	0,84	1,65

**Série F 115V / 60Hz**

GFM44AD	1/6 +	4.6	145	RSIR	111	1,62	1,30
GFM53AD	1/4	5,3	185	RSIR	131	1,75	1,30
GFM57AD	1/4	5,7	195	RSIR	138	1,85	1,30
GFM61AD	1/4 +	6.1	210	RSIR	168/150	2,75 / 1,90	1,25 / 1,40
GFR40AD	1/6	3,6	120	RSCR	84,6	7/8	1,42
GFR57AD	1/4	5,7	195	RSCR	116	1,2 / 7	1,55
GFM93AD	1/4	9,3	305	RSIR	218	3.2	1,40

**Série F 200-220V / 50Hz**

GFF53AT	1/6 +	5,3	150	RSCR	106	0,67	1,42
GFF57AT	1/5	5,7	165	RSCR	118	0,86	1,40
GFF66AT	1/4	6,6	196	RSCR	138	1,02	1,42
GFF75AT	1/4 +	7,5	218	RSCR	147	1,07	1,48
GFF86AT	1/3	8,6	250	RSCR	168	1.14	1,49
GFF93AT	1/3 +	9,3	275	RSCR	185	1,23	1,49

**Série F 100V-50 / 60Hz**

GFF66A J	1/4	6,6	195/233	RSCR	135/152	2,15 / 1,95	1,44 / 1,53
GFF93A J	1/3	9,3	270/305	RSCR	190/205	2,95 / 2,58	1,42 / 1,49

**Compresseur série F M / HBP R134a**

**220-240V 50 / 60Hz**

GFL60AG_AL	3/4	5,3	550/650	CSIR	245/265	1,88 / 1,69	2,24 / 2,45
------------	-----	-----	---------	------	---------	----------------	-------------------

**220 à 240 V 50 Hz**

GFL80AA	1	7,5	720	CSIR	317	1,96	2,27
GFL10AA	1.2	9,3	880	CSIR	430	2,50	2.0

**Compresseur série F LBP R600a****Série F (M / F) 220-240V / 50Hz**

BFM86A A	1/6 +	8,6	142	RSIR	101	0,82	1,40
BFF86A A	1/6	8,6	142	RSIR / RSCR	93/90	0,65 / 0,51	1,53 / 1,58
BFM93A A	1/5	9,3	155	RSIR	108	0,85	1,43
BFF93A A	1/5	9,3	160	RSIR / RSCR	103/98	0,73 / 0,58	1,55 / 1,63
BFM10A A	1/5 +	10,0	168	RSIR	122	1,01	1,38
BFF11A A	1/4	10,5	185	RSIR	121	0,70	1,45
BFM12A A	1/4 +	12,0	202	RSIR	144	1.10	1,40
BFF12A A	1/4 +	12,0	202	RSIR / RSCR	130/123	1,04 / 0,75	1,55 / 1,64

**Compresseur haute efficacité série F (T) 220-240V / 50Hz**

BFT57A A	1 / 7-	5,7	95	RSCR	53/50	0,28 / 0,24	1,80 / 1,90
BFT75A A	1/6	7,5	130	RSCR	75/72	0,35	1,73 / 1,80
BFT86A A	1/5	8,6	142	RSCR	82/74	0,43 / 0,36	1,73 / 1,92
BFT93A A	1/5	9,3	155	RSCR	82	0,50	1,90
BFT10A A	1/5 +	10,0	175	RSCR	100/92	0,60 / 0,43	1,72 / 1,90
BFT11A A	1/4	10,0	180	RSCR	100	0,54	1,80
BFT12A A	1 / 4-	11,5	200/210	RSCR	116/114	0,54 / 0,52	1,72 / 1,86

### Série F 200-220V / 50Hz

BFF75AT	1/6	7,5	130	RSCR	80	0,46	1,63
BFF86AT	1/5	8,6	142	RSCR	91,5	0,65	1,55
BFM93AT	1/5	9,3	158	RSIR	112	0,93	1,41
BFF93AT	1/5	9,3	160	RSCR	100	0,66	1,60
BFF11AT	1/4	11	175	RSCR	110	0,76	1,60
BFT12AT	1/4	11,5	200	RSCR	130	1.0	1,50

### Série F 115 / 60Hz

BFR57AD	1/6	5,7	120	RSCR	75	0,73	1,60
BFR75AD	1 / 5-	7,5	156	RSCR	92	0,90	1,70
BFM10AD	2/7	10,0	200	RSCR	133	1,55	1,50
BFR10AD	2/7	10,0	195	RSCR	116	1,32	1,65
BFM12AD	1/3	11,0	230	RSCR	153	1,65	1,50

### Compresseur série F LBP R290a

## 220 à 240 V / 50 Hz

PFT61AA	3/8	6.1	285	RSCR	183	1,55
PFT66AA	3/8	6,6	310	RSCR	200	1,56
PFT66AA ©	3/8	6,6	310	RSCR	190	1,65
PFT75AA	1 / 2-	7,5	350	RSCR	216	1,62
PFT75AA ©	1 / 2-	7,5	350	RSCR	206	1,70
PFT86AA	1/2	8,6	388	RSCR	258	1,50
PFT86AA ©	1/2	8,6	421	RSCR	263	1,60
PFT93AA ©	3/5	9,3	455	RSCR	284	1,60

## Compresseur série F L / MBP R290

## 220 à 240 V / 50 Hz

PFL57AA	1/3	5,7	255/490	CSIR	170/235	1,50 / 2,09
PFL75AA	1 / 2-	7,5	350/657	CSIR	248/324	1,41 / 2,03

: GFF44AA	Model: GFF44AA
: 4.4cm	Dispi: 4.4cm
: RSIR/RSCR	Motor Type: RSIR/RSCR
: 130W	Cooling Capacity: 130W
: 99/93W	Input power: 99/93W
: 0.65/0.53A	Rated Current: 0.65/0.53A
: 1.31/1.40	Cop: 1.31/1.40
: 200	Oil Charge: 200



Private Picture Copyright : WWW.MBSM.PRO

### Product Detailed

- 1.pass CB,3C,CE,RoHS
- 2.excellent start performance
- 3.strong ability of cooled ambient
- 4.low noise,low power consumption

## R134a Fluorine-free Freezing Compressor LBP

Model	Displ. (cm <sup>3</sup> )	Power HP	Motor Type	Volt.- Frequency	Cooling Capacity	Input Power	Rated Current (A)	COP(W/W)	Oil Charge Volume
GFF44AA	4.4	1/6	RSIR/RSCR	220-240V~50HZ	130	99/93	0.65/0.53	1.31/1.40	200
GFF57AA	5.7	1/5	RSIR/RSCR	220-240V~50HZ	166	122/112	0.86/0.62	1.36/1.48	200
GFF66AA	6.6	1/4	RSIR/RSCR	220-240V~50HZ	195	143/132	0.92/0.74	1.36/1.48	200
GFF75AA	7.5	+1/4	RSIR/RSCR	220-240V~50HZ	215	156/147	1.15/0.83	1.38/1.46	200
GFF86AA	8.6	1/3	RSIR/RSCR	220-240V~50HZ	250	156/148	1.24/0.90	1.40/1.52	200
GFF93AA	9.3	1/3	RSIR/RSCR	220-240V~50HZ	270	156/149	1.25/0.95	1.46/1.54	230

### Test Conditions(ASHRAE)

Evaporating temperature -23.3°C

Condensing temperature 54.4°C

Subcooling temperature 32.2°C

Suction temperature 32.2°C

Ambient temperature 32.2°C

About Advantages of Model GFF44AA, 1/6HP  
 1.high efficiency, energy-saving  
 2.R134a fluorine-free compressor  
 3.adjustable low-carbon emission  
 4.excellent cooling speed, large capacity

About More Application of Model GFF44AA

1.fit for small ice machine(maker)

2.suitable for home fridge or freezer

3.ice cream display, showcase, wine display, and other freezing equipments

About Compressor Spare Parts

1. four rubber sleeve

2. one PTC starter

3. one capacitor

4. one relay cover

5. one overload protector
6. four shockproof rubber washer



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

- GTM 45 AA 1/6 130 watts R 134 A
- GFF 57 CR 1/5 166 watts R 134 A
- GFF 66 AA 1/4 195 watts R 134 A
- GFF 75 AA 1/4 + 215 watts R 134 A
- BFF 12 AA 1/4 202 watts R 600 A

MODÈLE	PUISSANCE HP	TENSION	DÉPLACEMENT (CM <sup>3</sup> )	CAPACITÉ DE REFROIDISSEMENT [W / CAL]	PUISSANCE D'ENTREE [W]	TYPE DE MOTEUR	COPW / W	CHARGE D'HUILE (ML)
GFF44AA	1/6 HP	220 ~ 240V-50Hz	4,6	130/112	99/93	RSIR / RSCR	1,31 / 1,40	1,31 / 1,40
GFF57AA	1 / 5Hp	220 ~ 240V-50Hz	5,7	166/143	122/112	RSIR / RSCR	1,36 / 1,48	200
GFF66AA	1 / 4Hp	220 ~ 240V-50Hz	6,6	195/170	143/132	RSIR / RSCR	1,36 / 1,48	200
GFF75AA	1/4 + Hp	220 ~ 240V-50Hz	7,5	215/185	156/147	RSIR / RSCR	1,38 / 1,46	200



BFF12AA	1 / 4Hp	220 ~ 240V-50Hz	12,0	202/174	130/123	RSIR / RSCR	1,55 / 1,64	200
---------	---------	--------------------	------	---------	---------	----------------	-------------------	-----

