

**Mbsm.pro, Compressor,
ELECTROLUX, 3/4 Hp ++ (big),
R-12, S26TY, HMBP**

written by Lilianne | 2 January 2022



Private Picture Copyright: WWW.MBSM.PRO

Private Picture Copyright: WWW.MBSM.PRO

Commercial R12 – Medium Suction Temperature

Capacity range (watts)	Aspera	Kirby	Old Kirby Model	Danfoss	L'Unite Hermetique	Unidad Electrolux	Kelvinator	Necchi	Bulkon
201-250		AE6LMY	AE67ZD7 AE6LMA	TL4B		L57PX	S88ND	M4J	
250-300								M5J	
301-350	A5144A	AE8MG	AE59ZF9 AE8LMA						
351-400		AE9MHY	AE4425A AE9MHA	FR6B	CAE59ZF9	L76PX		M7J	
401-450	A5160A			FR7.5B		L68TY	S54FD		
450-500	A6170A	AEV9LMY	AE7416A AE10LMA	FR8.5B	CAE41ZF11	L88TX	S44ND	M9J	
501-550							S54FD S44CFD	M11, A9	
551-600	T6185A	AE12LMY	AE12LJ	FR10B	CAE4440A	P12TY	S33FD S33TF		
601-650	E6187A			FR11B SC10B					
651-700		AE14LMY	AE7423A AE14LMA			P14TY			KB14B1
701-800	T6213A			SC12B	CAJ4452A			A13	
801-900		AE16LMY	AE16LMA AE16LJ	SC15B				N17	KB19B1
901-1000		AJ18MY	AJ7428A						KB19B1
1001-1200	T6215A	AJ22LMY	AJ7434A AJ22LJ	SC18B	CAJ4461A	S18TY	S5050FDH		KB23B1
1201-1400	J6220A	AJ26LMY	AJ7445A AJ26LJ	SC21B		S26TY	S7575FDH		KB26B1
1401-2000	J6226A	AJ34LMY	AJ7457A AJ34LJ		CAJ4511A	S34TY	S1010FDH		KB37B1
2001-2500	H6238A	AH49MHY	AH4514A		CAH4518A TAH4518A				
2501-3500	H6253A	AH74MHY	AH4521A		CAH4524A TAH4524A				



HMBP															
R12 50 Hz			CECOMAF (W)						ASHRAE		R12 50 Hz				
			-25	-15	5		10	7.2							
					W	COP		kcal/h	COP						
220-240V 50Hz ~I															
L45PX	1/6	F	4.50	77	131	325	1.68	391	330	1.91	C	300	8.4	RSIR	R
L57PX	1/5	F	5.67	97	171	422	1.84	505	427	2.10	C	300	9.5	RSIR	R
L76TX	1/5	F	7.57	131	223	545	1.84	654	553	2.07	C-V	300	9.5	CSIR	R
L88TY	1/4	F	8.85	165	276	646	1.87	768	652	2.11	C-V	300	10.0	CSIR	R
P12TY	3/8	F	12.00	209	356	871	1.82	1044	882	2.05	C-V	400	11.2	CSIR	R
P14TY	3/8	F	14.00	242	412	985	1.73	1176	996	1.96	C-V	400	11.5	CSIR	R
R18TY	1/2	F	18.10	277	533	1328	2.02	1586	1343	2.30	C-V	640	19.9	CSIR	R
X18TY	1/2	F	18.40	322	544	1323	1.95	1587	1340	2.20	C-V	500	16.1	CSIR	R
S26TY	3/4	F	25.93	391	770	1933	2.01	2307	1955	2.29	C-V	887	22.7	CSIR	R
S34TY	1	F	34.42	643	1171	2752	2.31	3255	2771	2.60	C-V	887	22.7	CSR	R
200-220/230V 50/60Hz ~I															
L45PX	1/6	F	4.50	77	131	325	1.59	391	330	1.79	C	300	8.4	RSIR	R
L57PX	1/5	F	5.67	97	173	389	1.75	456	390	1.96	C	300	9.5	RSIR	R
S18TY	1/2	F	18.10	277	533	1329	1.99	1586	1344	2.26	C-V	887	21.8	CSIR	R
X18TY	1/2	F	18.40	322	544	1323	1.93	1587	1340	2.18	C-V	500	16.1	CSIR	R
S26TY	3/4	F	25.93	391	770	1933	2.00	2307	1954	2.27	C-V	887	22.7	CSIR	R
S34TY	1	F	34.42	643	1171	2752	2.27	3255	2770	2.58	C-V	887	22.7	CSR	R

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_S26TYTélécharger

Mbsm.pro, book, catalog compressor ZEL pdf

written by Lilianne | 2 January 2022



Private Picture Copyright : WWW.MBSM.PRO



Copyright : WWW.MBSM.PRO

		cc	hp		hz	w	w	w	w/w	w/w	µF	mm	kg
220-240V/50Hz													
普效系列 Standard Efficiency Range													
HML140A	Al	8.0	1/8	RSIR/RSCR	50	140	96	90	1.46	1.56	3	152	6.3
中效系列 Medium Efficiency Range													
HDL100A	Al	5.7	1/10	RSIR/RSCR	50	98	65	60	1.50	1.64	2.5	161	6.9
HDL125A	Al	7.0	1/10	RSIR/RSCR	50	125	77	71	1.62	1.75	2.5	164	7.2
HDL140A	Al	8.0	1/8	RSIR/RSCR	50	140	86	80	1.63	1.76	2.5	164	7.2
高效系列 High Efficiency Range													
HXL100A	Cu	5.7	1/15	RSCR	50	98		52		1.88	2	161	7.3
HXL125A	Cu	7.0	1/10	RSCR	50	125		65		1.91	2	161	7.3
HXL140A	Cu	8.0	1/10	RSCR	50	140		73		1.91	2	161	7.3
HXL170A*	Cu	9.3	1/8	RSCR	50	170		89		1.91	2	161	7.3
超高效系列 Top Efficiency Range													
HPL100A*	Cu	5.7	1/14	CSCR	50	100		50		2.00	2	161	7.3
HPL125A*	Cu	7.0	1/12	CSCR	50	125		63		2.00	2	161	7.3
HPL140A*	Cu	8.0	1/10	CSCR	50	140		70		2.00	2	161	7.3

220-240V/60Hz

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_catalogo-compresores-ZEL-pdf-2Télécharger

Mbsm.pro, COMPRESSOR, ZEL,
 Zanussi, refrigerator,
 CUBIGEL/ ACC, HML140A,
 HDL140A, LBP, R600A,

220-240V, 1 /8hp, 140w

written by Lilianne | 2 January 2022



Mbsm.pro, COMPRESSOR, ZEL, Zanussi, refrigerator, CUBIGEL/ ACC
, HML140A, HDL140A, LBP, R600A, 220-240V, 1 /8hp, 140w

Mbsm.pro, Compressor, ACC, Cubigel, Huayi, Electrolux, ZEM, MPT14LA , MPT14RA, LBP , R404A, R507, 1/2HP, 220-240V

written by Lilianne | 2 January 2022

Compressor Tecumseh L` Unite CAJ2432Z, LBP – R404A, 220 –
240V, 50 Hz, 1 phase, discharge: 18.3 cm³, oil type: P0E, oil
charge: 887 cm³, electrical equipment: CSR, cooling power 381
W at -35 / +40 °C, connection: suction: 1/2 inch, discharge:
5/16 inch, sound level: 56 dBA, start capacitor: 8 8 uF/250V,

run capacitor: 15 uF/400V, expansion device: capillary or expansion valve, height: 271 mm, weight: 21.5kg

Type: Low back pressure (LBP)

Refrigerant: R404a/507

Displacement: 14.32cm³

Power: 1/2CV

Voltage: 230V – 50Hz

Single-phase

Motor type: CSR

Weight: 13.4 kg

Evaporation temperature

-40°C: 243W


-30°C: 420W

-25°C: 535W

-10°C: 988W



Private Picture Copyright : WWW.MBSM.PRO

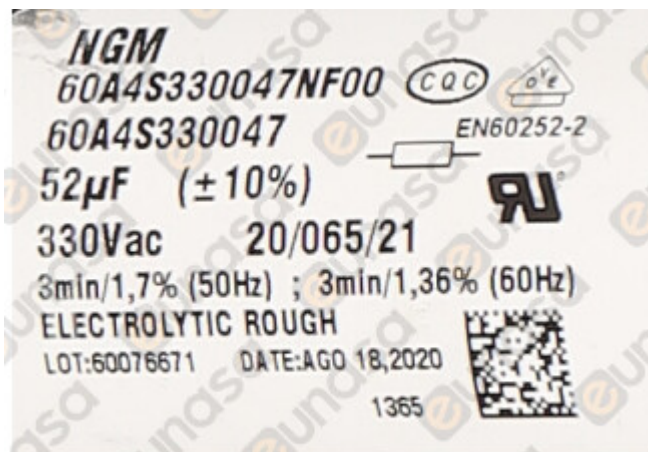

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_MPT14LATélécharger

**Mbsm.pro, COPLAND,
Compressor, KCJ511HAE,
KCJ511HAE-BXXX , HBP, 1-3/8
hp big ++, R-22 , 230 V, 50**

Hz, 1PH, FAN, 350 ft3 / m

written by Lilianne | 2 January 2022

Technical Specification	
Cooling Capacity (Btu/hr)	11275
Cooling Capacity (w)	3302
HP	1-3/8
LRA	54

COMPRESSOR MECHANICAL AND PHYSICAL DATA

Number of cylinders 2

Displacement @ 50 Hz, cu.m/h 3.2

Bore/Stroke, mm 3.5/1.9

Length/Width, mm 235/179

Height, mm 264

Net Weight, kg 21.5

Stub Suction, inch 5/16

Stub Discharge, inch 5/16

Oil Quantity, l 0.9

Base mounting (hole dia), mm NA (0.0)

Sound Pressure @ 1m (HT), dBA 57

Sound Power (HT), dBA 68

COMPRESSOR ELECTRICAL DATA (220/240V – 1~ – 50Hz)

Locked Rotor Current, A 25

Default Enclosure Class IP 21 (IEC 34)

ACCESSORIES OPTIONAL

Mounting Grommets Standard

Single Phase Equipment Relay, Start and Run Capacitor



Private Picture Copyright: WWW.MBSM.PRO

Horse Power

50HZ

Brand

COPLAND

Compressor Technology

HERMETIC

Model Name/Number

KCJ511HAE

Power

220V



Private Picture Copyright: WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_KCJ511HAETélécharger](#)


[Mbsm_dot_pro_private_PDF_KCJ511HAE-1Télécharger](#)

Saunier Duval C25E

written by Lilianne | 2 January 2022



Private Picture Copyright: WWW.MBSM.PRO

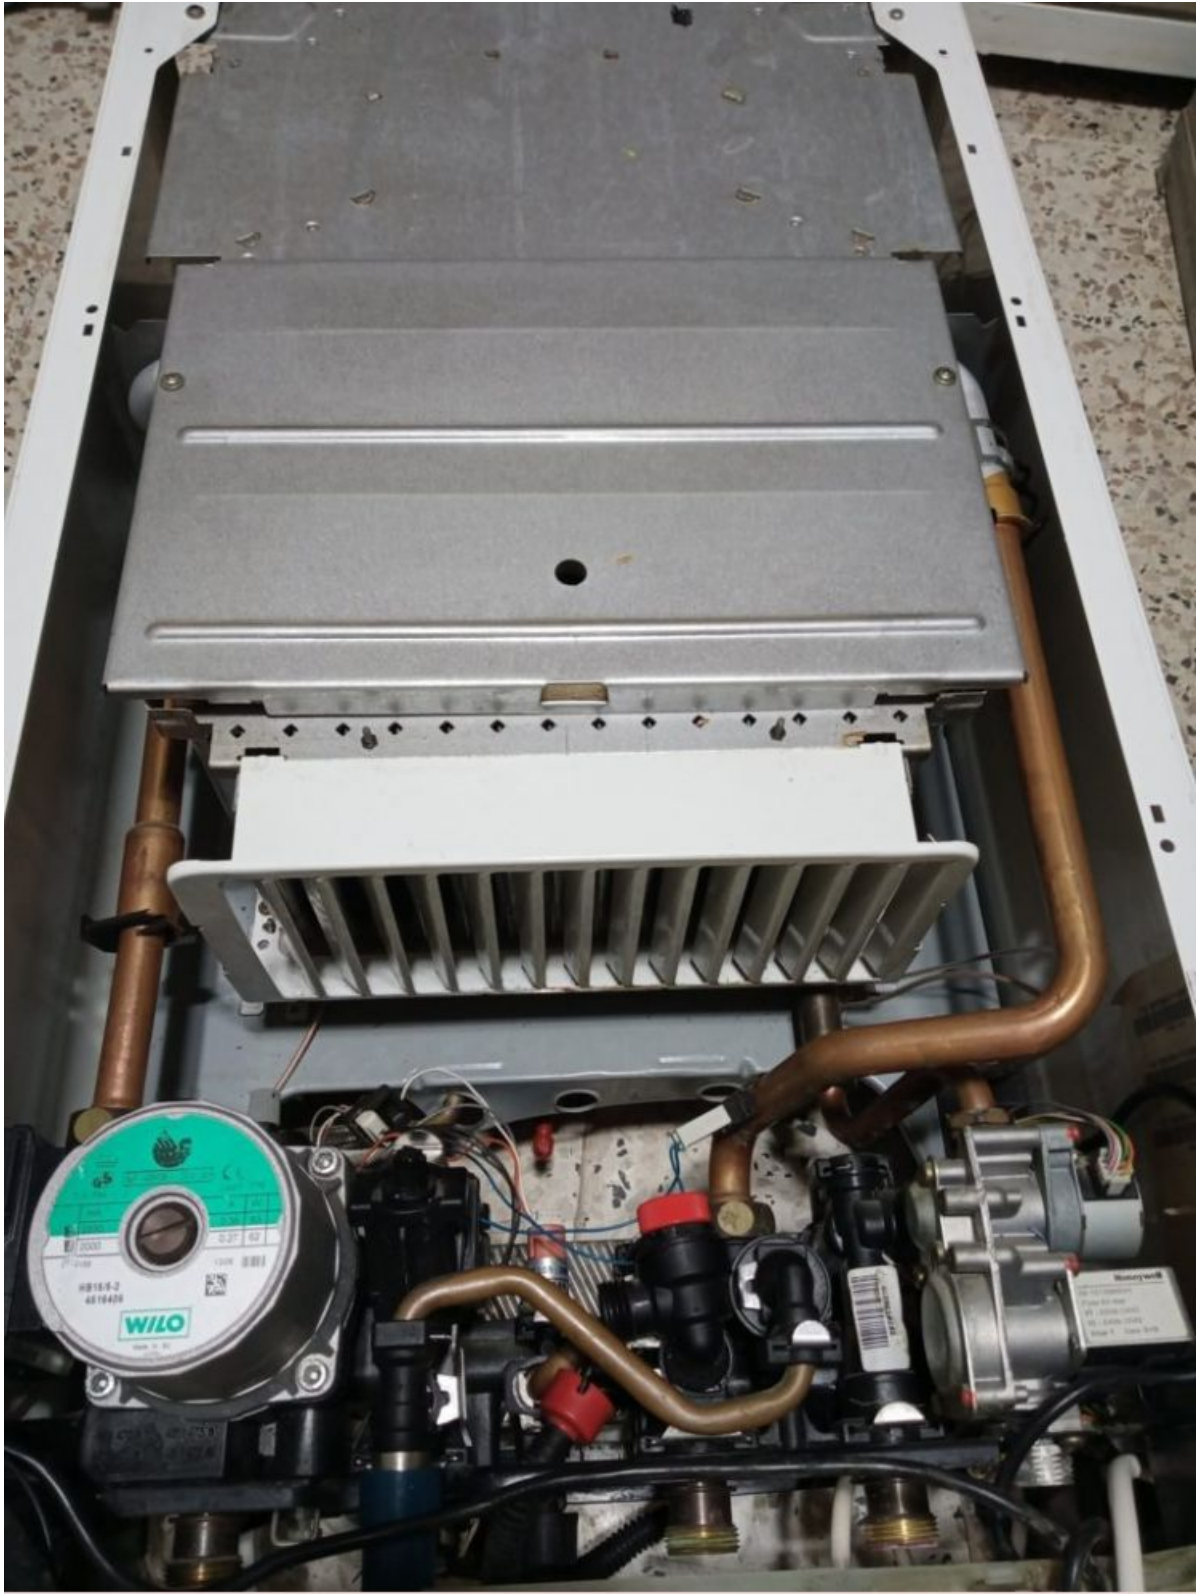

Private Picture Copyright: WWW.MBSM.PRO

**Thermostat d'ambiance
, Thermostat de
sécurité, Marque IMIT, Italie**

written by Lilianne | 2 January 2022













IMIT
STB 90-110°C TYPE LS1 7025
N.C.C. 182.5A/280V-
N.O.C. 182.5A/250V-
DIN 18251/21
0487 Categoria IV T85



Private Picture Copyright : WWW.MBSM.PRO





Private Picture Copyright : WWW.MBSM.PRO

SCHNEIDER N:ATV32H075M2
variable speed drive ATV32 –
0,75 kw – 200 V – 1 phase –
with heat sink

written by Lilianne | 2 January 2022







PINCE EMBOITURE VIRAX 12-32MM SERTISSAGE AXIAL PER-PEX 12-16MM

written by Lilianne | 2 January 2022













Private Picture Copyright : WWW.MBSM.PRO

Machine a laver lg 11kg

written by Lilianne | 2 January 2022




Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

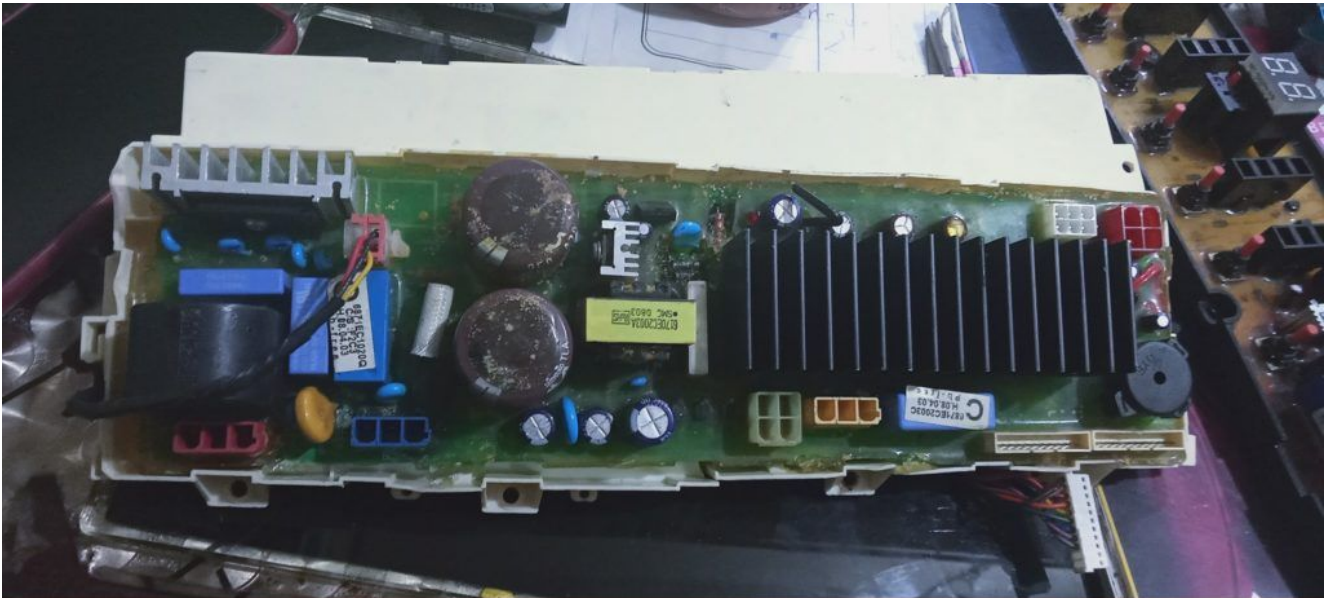

Private Picture Copyright: WWW.MBSM.PRO