

SCHNEIDER N:ATV32H075M2 variable speed drive ATV32 – 0,75 kw – 200 V – 1 phase – with heat sink

written by Lilianne | 29 December 2021







PINCE EMBOITURE VIRAX 12-32MM SERTISSAGE AXIAL PER-PEX 12-16MM

written by Lilianne | 29 December 2021



Machine a laver lg 11kg

written by Lilianne | 29 December 2021



BONNAMY AUTOMATIC TUBE BENDER

written by Lilianne | 29 December 2021







Private Picture Copyright: WWW.MBSM.PRO





White whale look machine a laver

written by Lilianne | 29 December 2021



Private Picture Copyright: WWW.MBSM.PRO



Mbsm.pro, Compressor,
JIAXIPERA, ND1080Y, 1/8HP,
ND1090Y, 1/8+HP, ND1110Y,
1/7HP, ND1111Y, 1/6-HP,
ND1112Y, 1/6+HP, NX1080Y,
1/8HP, NX1090Y, 1/8+HP,
NX1110Y, 1/7HP, NX1111Y,
1/6HP, NX1112Y, 1/6+HP,
NX1113Y, 1/5HP, NX1114Y,
1/5+HP, NX1116Y, 1/4HP,
NX1117Y, 1/4HP, NX1119Y,
1/4+HP, NX1120Y, 1/4+HP,
TB1080Y, 1/8HP, TB1090Y,
1/8+HP, TB1110Y, 1/7HP,
TB1111Y, 1/6HP, TB1112Y,
1/6+HP, TB1113Y, 1/5HP,

**TB1114Y, 1/5+HP, TX1080Y,
1/8HP, TX1090Y, 1/8+HP,
TX1110Y, 1/7HP, TX1111Y,
1/6HP, TX1112Y, 1/6+HP,
TX1113Y, 1/5HP, TX1114Y,
1/5+HP, VNX1111Y, 1/6HP,
VNX1113Y, 1/5HP, VNX1116Y,
1/4HP, ZBX1117CY, 1/4HP,
ZBX1119CY, 1/4+HP, ZBX1121CY,
1/4+HP**

written by Lilianne | 29 December 2021

Mbsm.pro, Compressor, JIAXIPERA, ND1080Y, 1/8HP, ND1090Y,
1/8+HP, ND1110Y, 1/7HP, ND1111Y, 1/6-HP, ND1112Y, 1/6+HP,
NX1080Y, 1/8HP, NX1090Y, 1/8+HP, NX1110Y, 1/7HP, NX1111Y,
1/6HP, NX1112Y, 1/6+HP, NX1113Y, 1/5HP, NX1114Y, 1/5+HP,
NX1116Y, 1/4HP, NX1117Y, 1/4HP, NX1119Y, 1/4+HP, NX1120Y,
1/4+HP, TB1080Y, 1/8HP, TB1090Y, 1/8+HP, TB1110Y, 1/7HP,
TB1111Y, 1/6HP, TB1112Y, 1/6+HP, TB1113Y, 1/5HP, TB1114Y,
1/5+HP, TX1080Y, 1/8HP, TX1090Y, 1/8+HP, TX1110Y, 1/7HP,
TX1111Y, 1/6HP, TX1112Y, 1/6+HP, TX1113Y, 1/5HP, TX1114Y,
1/5+HP, VNX1111Y, 1/6HP, VNX1113Y, 1/5HP, VNX1116Y, 1/4HP,
ZBX1117CY, 1/4HP, ZBX1119CY, 1/4+HP, ZBX1121CY, 1/4+HP



-
-
-
-
-

Mbsm.pro, Deep, freezer, congela, 383 Litre, Compressor, R134A, 215W, 1/4 Hp++, 1/3 Hp-, 215W

written by Lilianne | 29 December 2021

□ □□□□ □□□□□ ,□□□□□□□□ □□ □□□□□□□ □□□□□□ □□□□□ , □□□hp
 ,□ □□□□□ □□□□□□, □□□□ □□□□□ □□□□□hp

-



Private Picture Copyright: WWW.MBSM.PRO





Mbsm.pro, Refrigerator, Compressor, Samsung, 1/4 Hp, r134a, 150g, MK172HL1UA, MK172H-L1UA, MK172HL1UA/TSE, 200/220V-50HZ/ 135W, 200/220V-60HZ/159W, RSCR

written by Lilianne | 29 December 2021



https://www.mbsm.pro/wp-content/uploads/2020/12/Mbsm_dot_pro_private_PDF_compressor-catalogue-2015-1.pdf



AC 200-220V~50Hz, 220V~60Hz	Model	Type	220-60	118	137	468	114	1.04	1.20	4.11	
			220-50	102	119	405	91	1.12	1.30	4.45	
NC1A43HLB	RSCR	220-60	118	137	468	100	1.18	1.37	4.68	ST	
		220-50	120	140	476	113	1.06	1.23	4.21		
SD152H-S1UB	RSCR	220-60	146	170	580	122	1.20	1.39	4.75	ST	
		220-50	146	170	580	139	1.05	1.22	4.17		
SD162H-L1UB	RSCR	220-60	182	212	723	152	1.20	1.39	4.75	ST	
		220-50	168	195	667	153	1.10	1.28	4.36		
SK170H-L1UB	RSCR	220-60	206	240	818	164	1.26	1.46	4.99	ST	
		220-50	173	201	687	141	1.23	1.43	4.87		
MSA170H-L1B	RSCR	220-60	220	256	873	163	1.35	1.57	5.36	ST	
		220-50	176	205	699	131	1.34	1.56	5.33		
MK172H-L1U	RSCR	220-60	224	260	889	159	1.41	1.64	5.59	ST/OC	
		220-50	176	205	699	135	1.30	1.52	5.18		
MK172H-L1UA	RSCR	220-60	224	260	889	159	1.41	1.64	5.59	ST/OC	
		220-50	203	236	806	182	1.12	1.30	4.43		
SK182H-L2UA	RSCR	220-60	239	278	949	191	1.25	1.46	4.97	FC/OC	

Private Picture Copyright: WWW.MBSM.PRO



Mbsm.pro, Compressor, cubigel, huayi, ACC, Electrolux, HPY14AA, LBP, R600a, 1/5HP, 220-240V/1/50Hz, 166 W

written by Lilianne | 29 December 2021

Compressors/Compressors ACC – Electrolux HP14AH, LBP – R600a,
Power consumption 1/5HP, 220-240V/1/50Hz, Motor type RSIR,
Injection: Capillary operation, Displacement 14.32 cm³, Oil
type ISO VG10 Mineral oil, Oil quantity 300 cm³, Power 147 W
at -25 / +55 °C, Power consumption 166 W, Power 0.0 W, Cooling
capacity

-10 °C	-15 °C	-20 °C	-25 °C	-30 °C	-35 °C
344	276	216	166	124	92
Shipping Class				Standard	
Scope Of Application				LBP	
Lieferzeit				2-3 Wochen	
Type Of Construction				Piston	
Condensation Temperature				55°C	
Maker				ACC	
Manufacturer No.				HPY14AA	
Displacement In Cm3				14.32	
Measuring Requirements				Ashrae	
Refrigerants				R600a	
Series				HPY	

Condensing Units Compressors	Compressors
Suspense	220-240V
Weight In Kg	13

Compressor ACC Cubigel Huayi Electrolux ZEM HPY14AA, LBP - R600a, 220- 240V/1/50Hz, 1/5 HP, discharge 14.32 cm³, motor type RSIR, oil type ISO VG10 mineral, oil charge 300 cm³, 166 W at -25 / +55 °, input power, current 147 W, 0.96 A, expansion device: capillar, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

Refrigerant:	R600a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	6,5 mm
Suction:	8,1 mm
Working area:	LBP
Design type:	Hermetic
Model series:	HPY
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 10 Mineral
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg

Dimensions (length × width × height):	20,40 × 16,20 × 19,60 cm
customs tariff number:	84143081
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	HPY14AA
Modelname:	HP14AH
Stroke volume (cm ³):	14,32
Cooling capacity (W):	147
Power (HP):	0,25
Max. Starting current (A):	11,5
Max. Operating current (A):	0,96
Engine type:	RSIR
Note:	Static cooling
Oil quantity (l):	0,3
Compressor type:	Piston
Power range:	-35 C to -10 C
Alternative:	NBM1118Y , EMX70CLC , NBM1116Y
Pressure line (mm):	6,5
Suction line (mm):	8,1





Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_HPYP14AA-1Télécharger
Mbsm_dot_pro_private_PDF_HPYP14AATélécharger

Mbsm.pro, aj600ft-352, 12400Btu, Window clim, AJB5515EXD, 208-230V ~ 60Hz 200V ~ 50Hz, HBP/AC – Air Conditioning, R-22/R-407C

written by Lilianne | 29 December 2021

Product Specifications

Performance

Condition	Test Voltage	(R) Btu/h	(R) kcal/h	(R) W	(I) W	(E) Btu/Wh	(E) kcal/Wh	W/W	EVAP TEMP	COND TEMP	AMBIENT TEMP	RETURN GAS	LIQUID TEMP
ASHRAE (R-22)	230V ~ 60HZ	15000	3780	4395	1800	8.33	2.1	2.44	7.2°C (45°F)	54°C (130°F)	35°C (95°F)	35°C (95°F)	46°C (115°F)

General

Evaporating Temp. Range:	-23.3°C to 12.8°C (-10°F to 55°F)
Motor Torque:	Low Start Torque (LST)
Compressor Cooling:	Fan

Mechanical

Weight:	49
Weight Unit of Measure:	LB
Displacement (cc):	26.122
Oil Type:	Polyolester
Viscosity (cSt):	32
Oil Charge (cc):	781

Electrical

Voltage Range (50 Hz):	180-220
Voltage Range (60 Hz):	197-254
Locked Rotor Amps (LRA):	41
Rated Load Amps (RLA 50 Hz):	0
Rated Load Amps (RLA 60 Hz):	8.5
Max. Continuous Current (MCC in Amps):	12.6
Motor Resistance (0hm) – Main:	1.49
Motor Resistance (0hm) – Start:	7.77
MotorType:	PSC
Overload Type:	N/A
Relay Type:	N/A

Agency Approval

cURus Recognized

OEM

AJ600FT-299-A4


Dimensions – Height:	10.719
Dimensions – Width:	7.25
Dimensions – Length:	9.343
Dimensions Unit of Measure:	IN
Market:	OEM
Overload #:	8300CRAA46
Replacement Overload Kit #:	K90-34
Replacement Relay Kit #:	K71-19
Overload Spring:	26056
Cover Gasket:	30640

Terminal Cover:	70492
Bale Strap:	70491
Discharge Line Size:	0.3125 IN
Suction Line Size:	0.5 IN

Wholesale/Distribution

AJ600FT-205-J7

Dimensions – Height:	10.719
Dimensions – Width:	6.594
Dimensions – Length:	11.696
Dimensions Unit of Measure:	IN
Market:	Wholesale/Distribution
Overload #:	8300CRAA46
Replacement Overload Kit #:	K90-34
Replacement Relay Kit #:	K71-19
Overload Spring:	26056
Cover Gasket:	30640
Terminal Cover:	70492
Bale Strap:	70491
Discharge Line Size:	0.3125 IN
Suction Line Size:	0.5 IN
Loose Part Kit:	LP121

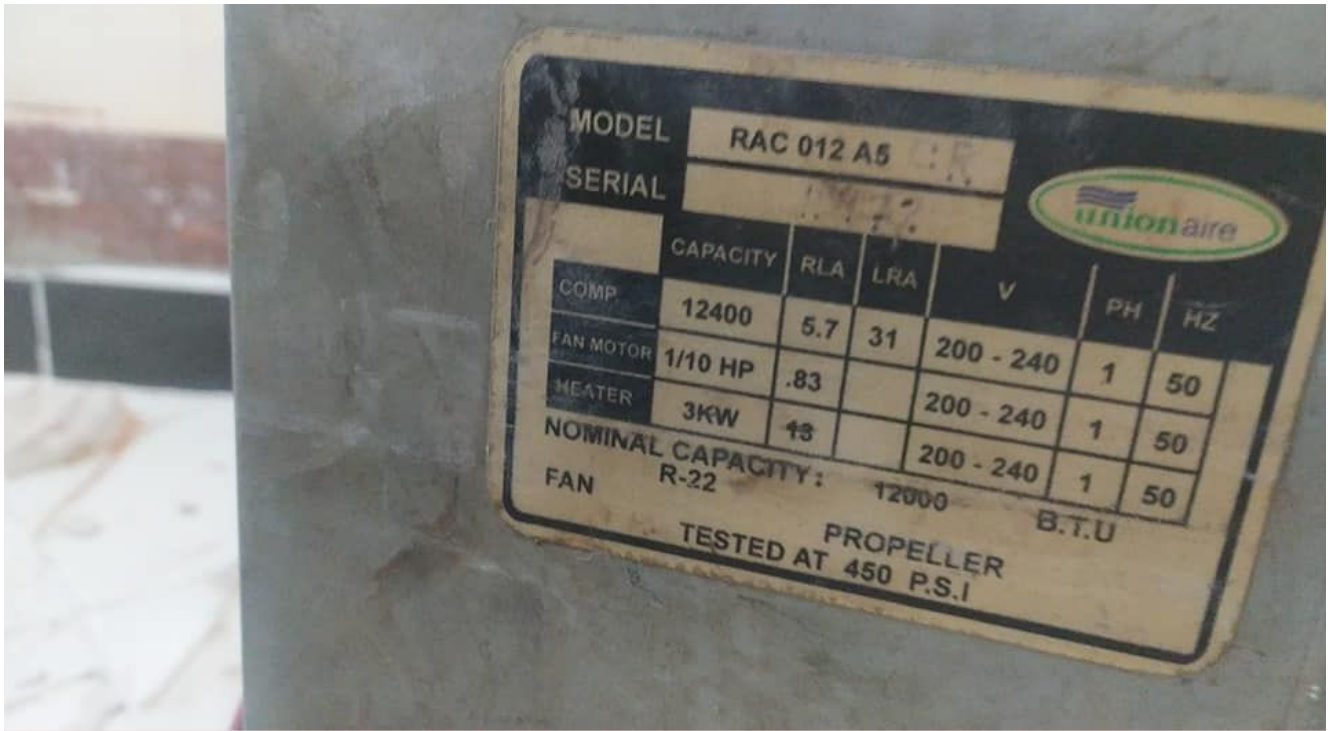

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_aj600ft-352-Tecumseh-Compressor-Product-RangeTélécharger

Mbsm_dot_pro_private_PDF_aj600ft-352-tecumseh_to_tecumseh_cross_refTélécharger