

# Mbsm.pro, File, pdf, How to read the codes of maneurop compressors

written by Lilianne | 2 April 2022

How to read the codes of maneurop compressors This model of maneurop compressors (

MT&MTZ)


is designed to work on a wide range of medium and high applications,

especially the MT

model. It is specially designed to work on modern freons HFC

R407C- R134a -R404a-R507A

. It uses polyester oil PZ1 6 0. These compressors have the feature of protecting against liquid returning to the compressor as they have a wide pocket at the entrance to the intake line to evaporate the liquid before entering the piston cylinder. More than 16 models with different capacities starting from 1.84 to 16.57 cubic inches and working to feed 220v as well as 380v

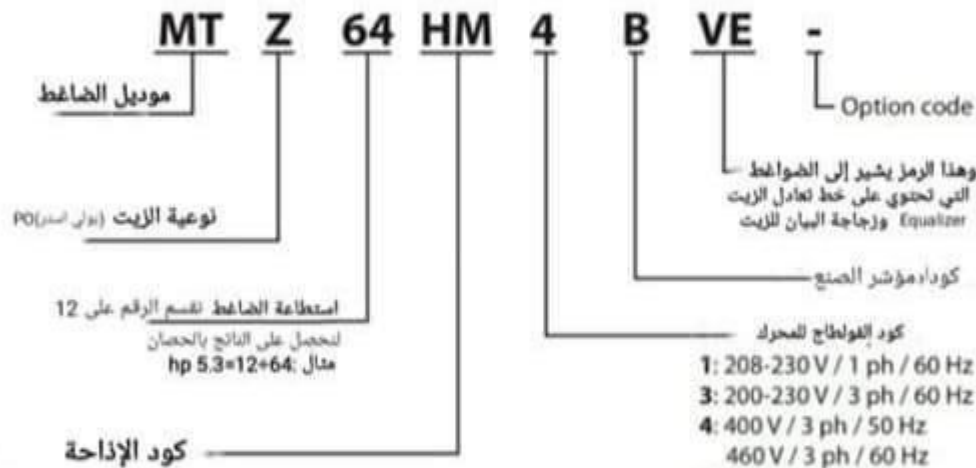

- 1: 208-230 V / 1 ph / 60 Hz
- 3: 200-230 V / 3 ph / 60 Hz
- 4: 400 V / 3 ph / 50 Hz
- 460 V / 3 ph / 60 Hz
- 5: 230 V / 1 ph / 50 Hz
- 6: 230 V / 3 ph / 50 Hz
- 7: 500 V / 3 ph / 50 Hz
- 575 V / 3 ph / 60 Hz
- 9: 380 V / 3 ph / 60 Hz

كود الإذاحة

JK: 1.84	HL: 5.87
JC: 2.33	HM: 6.57
JE: 2.93	HN: 7.38
JF: 3.29	HP: 8.29
JG: 3.69	HS: 10.45
JH: 4.14	HU: 13.15
HJ: 4.65	HV: 14.76
HK: 5.23	HW: 16.57



---

**Mbsm.pro, File, pdf,  
MSTM-12HR, Midea, 12500  
btu/h, r22, 830 g, 220 v, 1  
ph, T1, 1 ton, 1.5 HP**

written by Lilianne | 2 April 2022



SPLIT TYPE AIR CONDITIONER			
MODEL	MSTM-12HR		
COOLING CAPACITY	12500Btu/h		
HEATING CAPACITY	13000Btu/h		
REFRIGERANT	R22/830g		
EXCESSIVE OPERATING PRESSURE	DISCHARGE	3.0MPa	
	SUCTION	1.0MPa	
WEIGHT(INDOOR)	8.7kg		
WEIGHT(OUTDOOR)	32.4kg		
POWER SOURCE	220-240V~50Hz, 1Ph		
STANDARD RATING CONDITIONS	COOLING	CURRENT	5.6A
		INPUT	1290W
	HEATING	CURRENT	5.1A
		INPUT	1175W
MAX. CURRENT	10.0A		
MAX. INPUT	2000W		
OUTDOOR UNIT RESISTANCE CLASS	IP 24		
T			
MADE IN CHINA			

**CAUTION**

1. Ensure to evacuate the air inside the indoor unit and pipes with vacuum pump.
2. Make sure the additional amount of refrigerant to be charged is based on the pipe size and length, please refer to the INSTALLATION INSTRUCTIONS for details.
3. Incorrect installation due to ignoring of the instruction will cause serious problem to the machine.



SN 2413190930172200820041

Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, File, pdf, MSTM-12HR, Midea, 12500 btu/h, r22, 830 g, 220 v, 1 ph, T1, 1 ton, 1.5 HP

**Mbsm.pro, PDF, File, Sj-42S-SL, refrigerator, freezer, Sharp, 220 v, 1.1 A, 152 W, 385 L, R134A, 100G, compressor , 1/5 Hp**

written by Lilianne | 2 April 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, PDF, File, Sj-42S-SL, refrigerator, freezer, Sharp, 220 v, 1.1 A, 152 W, 385 L, R134A, 100G, compressor , 1/5 Hp

---

**Mbsm.pro, PDF, File,  
MFTS-36HR, Air conditioner,  
36000 BTU/h, 4.5 hp, r22**

written by Lilianne | 2 April 2022



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)


Mbsm.pro, PDF, File, MFTS-36HR, Air conditioner, 36000 BTU/h, 4.5 hp, r22



---

# Mbsm.pro, Pdf, File, ATET, Compressori, ZEM, WHIRLPOOL, r12, r134a

written by Lilianne | 2 April 2022

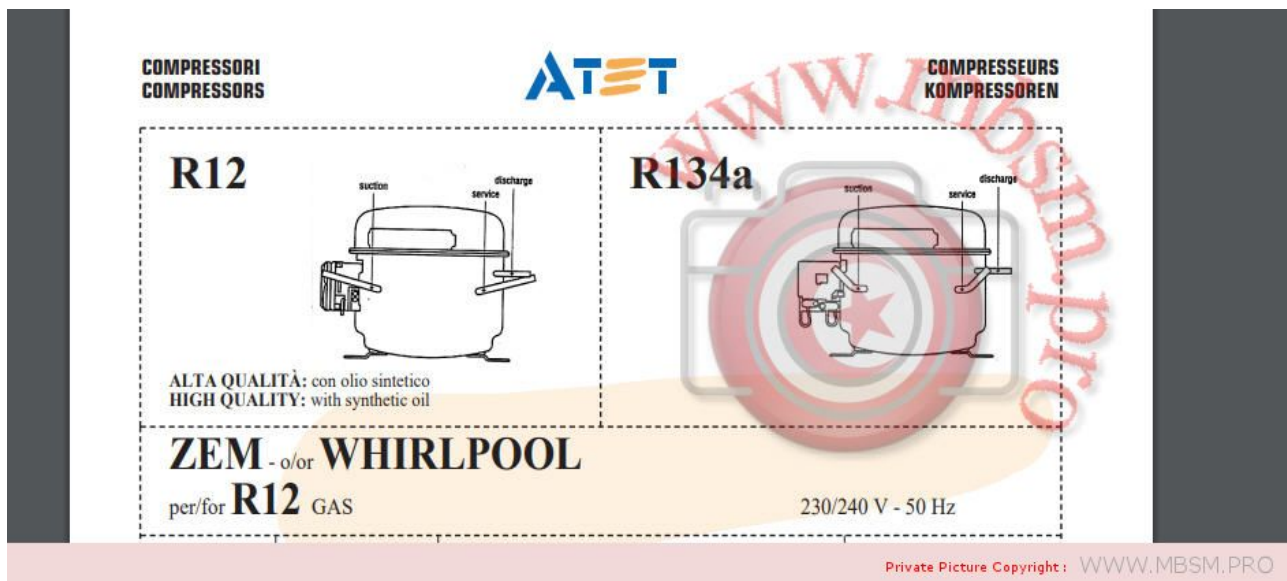

Mbsm.pro, Pdf, File, ATET, Compressori, ZEM, WHIRLPOOL, r12, r134a

---

# Mbsm.pro, PDF, Files, EG AS100HLR, Compressor, Lbp, 1/3 Hp, EMBARACO

written by Lilianne | 2 April 2022

**embraco****COMPRESSOR TECHNICAL DATA****COMPRESSOR DEFINITION**

Designation **EG AS100HLR**  
 Nominal Voltage/Frequency **220-240 V 50-60 Hz**  
 Engineering Number **513701174**

**A - APPLICATION / LIMIT WORKING CONDITIONS**

1 Type	Hermetic reciprocating compressor		
2 Refrigerant	R-134a		
3 Nominal voltage and frequency	220-240 / 50-60	[ V / Hz ]	
4 Application type	Low Back Pressure		
4.1 Evaporating temperature range	-35°C to -10°C	(-31°F to 14°F)	
5 Motor type	RSIR		
6 Starting torque	LST - Low Starting Torque		
7 Expansion device	Capillary tube		
8 Compressor cooling		Operating voltage range	
		50 Hz	60 Hz
8.1 LBP (32°C Ambient temperature)	Fan	198 to 264 V	-
8.2 LBP (43°C Ambient temperature)	Fan	198 to 264 V	-
8.3 HBP (32°C Ambient temperature)	-	-	-
8.4 HBP (43°C Ambient temperature)	-	-	-
9 Maximum condensing pressures/temperature			
9.1 Operating (gauge)	16.2	[kgf/cm.] (230 psig)	/ °CC - °CF
9.2 Peak (gauge)	20.6	[kgf/cm.] (293 psig)	/ °CC - °CF

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

Mbsm.pro, PDF, Files, EG AS100HLR, Compressor, Lbp, 1/3 Hp, EMBARACO

# Mbsm.pro, PDF, File, Embraco, Catalogue, r134a, Embraco Condensing Units

written by Lilianne | 2 April 2022



## Embraco Condensing Units

Unit Model	Motor Type	Expan. Device	Motor HP	Performance (Watts)								HRP Code	Sales Cat		
				-25°C	-20°C	-15°C	-10°C	-5°C	0°C	5°C	10°C			15°C	
<b>R134a MHBP</b>															
UEM16144Z	CSIR	CV	1/5	-	-	249	308	375	451	533	-	-	208162	20A	
UEM16160Z	CSIR	CV	1/6	-	-	335	411	499	597	706	-	-	208164	20A	
UEM16170Z	CSIR	CV	1/4	-	-	359	443	539	646	764	-	-	208166	20A	
UNEK6187Z	CSIR	CV	1/4	-	-	405	503	616	741	887	-	-	208168	20A	
UNEK6210Z	CSIR	CV	1/3	-	-	430	544	679	829	1005	-	-	208170	20A	
UNEK6212Z	CSIR	CV	1/2	-	-	640	800	975	1157	1354	-	-	208172	20A	
UNTS215Z	CSIR	CV	1/2	-	-	705	816	1003	1188	1362	-	-	208180	20A	
UNEK6214Z	CSIR	CV	1/2	-	-	658	826	1004	1192	1395	-	-	208174	20A	
UNTS220Z	CSIR	CV	2/3	-	-	843	1050	1281	1541	1828	-	-	208184	20A	
UNJ6220Z	CSIR	CV	3/4	-	-	994	1256	1529	1843	2154	-	-	207861	20A	
UNTS217Z	CSIR	CV	3/4	-	-	993	1275	1555	1861	2178	-	-	208182	20A	
UNJ6226Z	CSIR	CV	1	-	-	1372	1686	2035	2419	2814	-	-	207888	20A	
<b>R404A MHBP</b>															
UEM16144GK	CSIR	CV	1/4	-	-	277	338	400	470	543	615	-	-	208186	20A
UEM16152GK	CSIR	CV	1/4	-	-	301	368	435	504	574	644	-	-	208188	20A
UEM16165GK	CSIR	CV	1/3	-	-	360	445	525	626	729	815	-	-	208190	20A
UNEK6181GK	CSIR	CV	1/2	-	-	427	530	644	767	900	1040	-	-	208192	20A
UNEK6210GK	CSIR	CV	1/3	-	-	581	670	765	866	1032	1228	-	-	208194	20A
UNEK6213GK	CSIR	CV	1/2	-	-	734	904	1064	1213	1352	1468	-	-	208196	20A
UNEK6217GK	CSIR	CV	1/2	-	-	741	960	1180	1406	1640	1880	-	-	208198	20A
UNTS220GK	CSIR	CV	3/4	-	-	793	1024	1262	1506	1754	2009	-	-	206204	20A
UNTS222GK	CSIR	CV	3/4	-	-	TBA	TBA	TBA	TBA	TBA	-	-	206206	20A	
UNTS225GK	CSIR	CV	1	-	-	1206	1568	1878	2198	2526	2864	-	-	206202	20A
UNJ6225GK	CSIR	CV	1	-	-	1206	1523	1822	2094	2364	2616	-	-	208140	20A
UNJ6226GS	3ph	CV	1	-	-	1206	1523	1822	2094	2364	2616	-	-	208200	20A
UNJ6232GK	CSIR	CV	1-1/4	-	-	1467	1855	2219	2550	2879	3186	-	-	208145	20A
UNJ6232GS	3ph	CV	1-1/4	-	-	1467	1855	2219	2550	2879	3186	-	-	208150	20A
UNJ6238GK	CSIR	CV	1-1/2	-	-	1817	2297	2748	3157	3565	3983	-	-	208155	20A



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, PDF, File, Embraco, Catalogue, r134a, Embraco Condensing Units

# Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

written by Lilianne | 2 April 2022

R134a		HMBP   HBP		50 Hz		R134a compressors compatible with R12															
GREEN COOLING												REFRIGERATION CAPACITY °C									
MODEL	DISPLACEMENT cm <sup>3</sup>	POWER hp	APPLICATION	CPR COOLING	VOLTAGE FREQUENCY	MOTOR	STARTING	EXPANSION	COP in W/W 1 W = 0.864 kcal/h = 3.415 BTU/h Evaporating Temperature °C										DESIGN		
									Cecostat (W)					Ashrae							
									-25	-15	5	COP	10	kcal/h	COP	Kg					
GLY45RAa	4.56	1/6	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	71	139	373	1.85	452	385	2.25	9	Lb				
GLY45RAb	4.56	1/6	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	71	159	373	2.12	452	385	2.45	9	Lb				
GLY60RAa	5.98	1/5	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	106	191	486	2.04	586	500	2.36	9.9	Lc				
GLY60RAb	5.98	1/5	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	106	191	486	2.25	586	500	2.60	9.9	Lc				
GLY80RAa	8.10	1/5	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	159	275	681	2.17	819	700	2.50	10.4	Lc				
GLY80RAb	8.10	1/5	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	159	275	681	2.35	819	700	2.71	10.4	Lc				
GLY90RAa	9.09	1/4	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	169	298	748	2.06	901	770	2.37	10.5	Lc				
GLY90RAb	9.09	1/4	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	169	298	748	2.27	901	770	2.61	10.5	Lc				
GLY99RAa (**)	9.95	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	189	328	814	2.01	972	836	2.31	10.8	Ld				
GLY99RAb (**)	9.95	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	189	328	814	2.18	972	836	2.49	10.8	Ld				
GPY12RAa	12.10	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	228	401	993	2.05	1192	1020	2.35	12.6	Pd				
GPY12RAb	12.10	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	228	401	993	2.24	1192	1020	2.58	12.6	Pd				
GPY14RAa	14.32	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	296	492	1161	1.98	1386	1190	2.27	12.6	Pd				
GPY14RAb	14.32	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	296	492	1161	2.18	1386	1190	2.50	12.6	Pd				
GPY16RAa	16.15	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	315	522	1248	2.20	1490	1351	2.31	12.8	Pd				
GPY16RAb	16.15	3/8	HMBP	F	220-240V 50Hz -1	CSR	R	C-V	315	522	1248	2.38	1490	1351	2.50	12.8	Pd				

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, PDF, File, Cubigel Katalog, r134a, Huayi, Electrolux, ZEM

# Mbsm.pro, Baxi radiators aluminum, File, pdf , the best in Algeria

written by Lilianne | 2 April 2022

The best thank you in Algeria

Mbsm.pro, Baxi radiators aluminum, File, pdf , the best in Algeria

Mbsm\_dot\_pro\_private\_PDF\_Mbsm.pro-Baxi-radiators-aluminum-File-pdf-the-best-in-AlgeriaTélécharger



Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

---

# Mbsm.pro, Pdf, Book, Catalog, Electrolux, Compressor, r12, R22

written by Lilianne | 2 April 2022

Mbsm\_dot\_pro\_private\_PDF-Electrolux-Compressor-r12-  
R22-1ph-1Télécharger