

Info, Compressor, CbzN141L6L, 1/8 hp, All KuIthorn, Compressor, Pdf

written by Lilianne | 7 October 2023



Info, Compressor, CbzN141L6L, 1/8 hp, All KuIthorn, Compressor, Pdf

Mbsm.pro, Pdf, Samsung Compressor

written by Lilianne | 7 October 2023



Mbsm_dot_pro_private_PDF_____sumsung



Mbsm_dot_pro_private_PDF___sumsung
Mbsm_dot_pro_private_PDF_sumsung

(1)

**Mbsm.pro, Files, PDF,
compressori ortiz, all
compressor in one file**

written by rober us | 7 October 2023

Embraco compressori



CONDIZIONI DI RESA	ASHRAE	TEMP. EVAPORAZIONE	MOTORE V.220/50Hz
Temp. condens.: + 55		da - 25° a +10°C (MBP-HBP)	CSIR=Condensatore di spurto e relè
Temp. liquido: + 46(32)		da - 40 a -10°C (LBP)	CSR=Condens. di spurto,marcia, relè.
Temp. ambiente: + 35			3Phase= V.380/50Hz
Temp. Gas aspir.: + 35			

ATTACCHI A SALDARE

R. 404

(MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE-	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore V220	PREZZO EURO,00
			Resa -10°	Watt 0°				
404H2105	NB 6144 GK	1/6	297	450	4.38	331	CSIR	142
404H2110	NB 6152 GK	1/5	351	530	4.85	375	CSIR	148
404H2115	NB 6165 GK	1/4	413	611	6.00	511	CSIR	155
404H2120	NB 6181 GK	1/4P	514	774	7.40	567	CSIR	160
404H2125	NE 6210 GK	1/3	595	935	8.90	620	CSIR	168
404H2130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
404H2135	T 6217 GK	3/4	961	1515	14.50	1000	CSIR	290
404H2140	T 6220 GK	3/4	1164	1826	17.40	1100	CSR	328
404H2145	T 6222 GK	1	1554	2381	22.30	1500	CSR	340
404H2150	NJ/J 9226 GK	1	1587	2475	21.70	1320	CSR	400
404H2155	NJ/J 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
404H2160	NJ/J 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
404H2165	NJ/J 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
404H2170	NJ/J 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
404H2175	NJ/J 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_compressori

ortiz

Embraco compressori



CONDIZIONI DI RESA	ASHRAE	TEMP. EVAPORAZIONE	MOTORE V.220/50Hz
Temp. condens.: + 55		da - 25° a +10°C (MBP-HBP)	CSIR=Condensatore di spurto e relè
Temp. liquido: + 46(32)		da - 40 a -10°C (LBP)	CSR=Condens. di spurto,marcia, relè.
Temp. ambiente: + 35			3Phase= V.380/50Hz
Temp. Gas aspir.: + 35			

ATTACCHI A SALDARE

R. 404

(MBP-HBP) MEDIA-ALTA TEMPERATURA OLIO ESTERE

CODICE ASPE-	MODELLO	HP	ASHRAE		CIL. cc	W.assorb.	Tipo Motore V220	PREZZO EURO,00
			Resa -10°	Watt 0°				
404H2105	NB 6144 GK	1/6	297	450	4.38	331	CSIR	142
404H2110	NB 6152 GK	1/5	351	530	4.85	375	CSIR	148
404H2115	NB 6165 GK	1/4	413	611	6.00	511	CSIR	155
404H2120	NB 6181 GK	1/4P	514	774	7.40	567	CSIR	160
404H2125	NE 6210 GK	1/3	595	935	8.90	620	CSIR	168
404H2130	NE 9213 GK	1/2	840	1303	12.00	740	CSR	185
404H2135	T 6217 GK	3/4	961	1515	14.50	1000	CSIR	290
404H2140	T 6220 GK	3/4	1164	1826	17.40	1100	CSR	328
404H2145	T 6222 GK	1	1554	2381	22.30	1500	CSR	340
404H2150	NJ/J 9226 GK	1	1587	2475	21.70	1320	CSR	400
404H2155	NJ/J 9232 GK	1.2	1904	2976	26.20	1620	CSR	406
404H2160	NJ/J 9238 GK	1.5	2420	3705	32.70	2100	CSR	412
404H2165	NJ/J 9226 GS	1	1587	2475	21.70	1280	3 Phase	408
404H2170	NJ/J 9232 GS	1.2	1904	2976	26.20	1600	3 Phase	410
404H2175	NJ/J 9238 GS	1.5	2420	3705	32.70	2000	3 Phase	420

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, PDF, NUEVA WEB AREA COOLING SOLUTIONS

written by Lilianne | 7 October 2023

base)
- P. Verifique los datos (por ventilador)

R 404A
R507A

1.00 BAJA TEMPERATURA, Monof. 220/240 V 50 Hz

Modelo	Tipo	CV.	Cm3	Rendimientos en W						Código	Precio €
				-40	-35	-30	-25	-20	-10		
ML45FB	F	1/5	4,6	50	69	95	128	168	265	10001	134,00
ML60FB	F	1/5	5,67	66	93	128	170	210	339	10002	140,00
ML80FB	F	1/4	8,85	95	133	182	242	312	488	10003	146,00
ML90FB	F	1/3	8,85	83	134	193	264	342	529	10004	151,00
MP12FB	F	3/8	12,00	74	147	234	335	449	719	10005	172,00
MP14FB	F	1/2	14,00	116	195	291	404	536	847	10006	185,00
MX18FB-V*	F	5/8	18,20	99	202	331	492	683	1155	10007	330,00
MX23FB-V*	F	7/8	23,2	132	380	415	720	828	1470	10008	347,00
MS26FB-V*	F	3/4	26,15	165	331	525	745	993	1599	10009	365,00
MS30FB-V*	F	7/8	30,00	198	395	626	890	1194	1901	10010	381,00
MS44FB-V*	F	1	34,25	231	456	729	1040	1395	2229	10011	415,00

R134a

1.10 BAJA TEMPERATURA, Monof. 220/240 V 50 Hz

Modelo	Tipo	CV.	Cm3	Rendimientos en W						Código	Precio €
				-35	-30	-25	-23,3	-20	-10		
GD24AA**	S	1/20	2,42	12	21	30	40	70	90	10015	102,00
GD30AA**	S	1/12	3,05	21	33	49	55	68	112	10016	103,00
GD36AA**	S	1/12	3,58	26	40	58	65	79	130	10017	104,00
GD40AA**	S	1/10	4,03	31	48	67	74	90	149	10018	105,00
GL45AA**	S	1/8	4,56	34	54	78	88	108	180	10019	117,00
GL50AA**	S	1/7	5,12	34	64	91	102	124	207	10020	121,00
GL60AA**	S	1/6	5,99	50	76	108	120	146	241	10021	123,00
GL70AA	S-OC	1/5	6,64	58	87	122	135	164	270	10022	126,00
GL80AA	S-OC	1/5	8,1	69	102	146	162	197	330	10023	134,00
GL80BH	OC	1/5	8,1	69	102	146	162	197	330	10024	135,00
GL90AA**	S-OC	1/4	9,08	83	120	167	184	221	364	10025	143,00
GL90BH	OC	1/4	9,08	83	120	167	184	221	364	10026	146,00
GL12AB	S	1/3	12	84	133	192	214	261	429	10027	161,00
GP12BB	OC	1/3	12	84	133	192	214	261	429	10028	165,00
GP12FB	F	1/3	12	84	133	192	214	261	429	10029	172,00
GP14BB	OC	3/8	14	100	159	230	257	313	514	10030	175,00
GP14FB	F	3/8	14	105	167	242	270	329	540	10031	179,00


Datos temp. condensación y líquido +55° C / ambiente y aspiración +32° C

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, PDF, NUEVA WEB AREA COOLING SOLUTIONS

Mbsm.pro, Files, Pdf, analog, TECUMSEH, EUROPE, R12

written by Lilianne | 7 October 2023

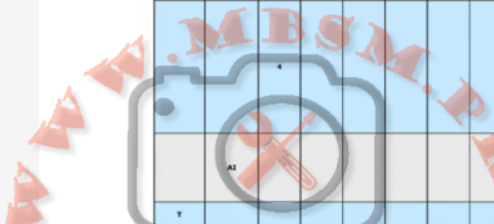

4	Применение
AZ	1 = Низкое испарное давление, Двигатель с стандартной стартовой крутящей момент
	2 = Низкое давление испарения, Двигатель с низким крутящим момент
	3 = Высокое давление испарения, Двигатель с стандартной стартовой крутящей момент
	4 = Высокое давление испарения, Двигатель с низким крутящим момент
	5 = Минимизация
	6 = Среднее и высокое давление испарения, Двигатель с высоким крутящим моментом
	7 = Среднее и высокое давление испарения, Двигатель с высоким стандартной стартовой крутящей момент
	Символы: CR-AZ-AEZ-AE-AL-FR-FA-FC-MSA
	R обозначает компрессоры, предназначенные для параллельного разбора
	Ex: TAMB, TADP, TAMB
	D обозначает компрессоры, установленные "пара"
	S обозначает одно-гребного вала конденсация групп
	C или полетель = однофазный
	T = bi-рефазный

R12-низкотемпературные КОМПРЕССОРЫ

TECUMSEH EUROPE	Мощность, л.с.	Aspera	Danfoss	Necchi	бывший Electrolux	Zanussi	DKK
AE12Z7	1/12	A1055	TL3A	M3,5	D30AS	E30601	KHO,63N06
AZ1335D	1/8	A1075	TL4A	M4	D36AS	E44101	KHO,75N07
AZ1355D	1/6	A1111	TL5A	M5	L55A	V1040G	MH1,0N12
AEZ1360A	1/5	B1112	FR7,5A	M7	L76A	V1350E	MH1,25N12
AEZ1380A	1/4	A1118	FR10A	M9	L88	E88102	MH1,6H15
AE1410A	1/3	E1121	FR11A	M11	P12		MH2,0H15
AE1412A	3/8	T1124	SC15A	M13	P14		

R12-высокотемпературные КОМПРЕССОРЫ

TECUMSEH EUROPE	Мощность, л.с.	Aspera	Danfoss	Necchi	бывший Electrolux	DKK
AZ9387	1/6	A5132	FR6BX	M4H	AE65ZA7	
CAE592F9	1/5	A5160	FR8,5B	M7H	L57PX	MH1,25N18
CAE4440A	1/3	E6185	SC10B		P14TY	
CAJ4452A	3/8	E6187	SC12B			
CAJ4461A	1/2	T6213	SC15B		CAJ2P	
CAJ4492A	3/4	J6220	SC21B			
CAJ4511A	1	J6226				
CAH4518A	1,5	H6238				
CAH4525A	2	H6253				

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, PDF, analog, TECUMSEH, EUROPE, R12

Mbsm.pro, Files, PDF, HERMETIC COMPRESSORS AND SPARES, EMBRACO

written by Lilianne | 7 October 2023

HERMETIC COMPRESSORS AND SPARES

EMBRACO

A range of domestic/light commercial compressors covering applications using R12 (alternative replacements) and R134A refrigerants. Compressors are supplied with LST electric as standard. PW/FF compressors can be fitted with a start capacitor for HST applications.



CODE	MODEL	APPLICATION	VOLTS/HZ	DISP CC	NOM HP	LIST £
R12 REFRIGERANT						
040453	EM30NP	LBP	220-240/50	3.01	1/10	81.08
040456	EM40NP	LBP	220-240/50	3.77	1/8	84.29
040459	EM55NP	LBP	220-240/50	4.99	1/6	88.14
040465	PW3.5K9	H/M/LBP	220/50-60	3.47	1/8	78.23
040468	PW4.5K11	H/M/LBP	220/50-60	4.33	1/6	81.65
040474	FF6BK	H/M/LBP	220-240/50	6.23	1/5	91.00
040477	FF7.5BK	H/M/LBP	220-240/50	6.93	1/5	93.51
R134A REFRIGERANT						
040503	EM30HNP	LBP	220-240/50	3.01	1/12	97.88
040506	EM40HNP	LBP	220-240/50	3.77	1/10	100.88
040509	EM50HNP	LBP	220-240/50	4.99	1/8	102.83
040512	EM60HNP	LBP	220-240/50	5.54	1/6	106.66
040568	EM45HHR	M/M/LBP	220-240/50	3.77	1/10	101.25
040569	EM55HHR	HBP	220-240/50	4.60	1/8	104.88
040570	EM65HHR	HBP	220-240/50	5.54	1/6	109.15
040533	PW3.5HK9	HBP	220-240/50-60	3.47	1/8	95.54
040536	PW4.5HK11	HBP	220-240/50-60	4.33	1/6	97.89
040515	FFI6HAK	H/M/LBP	220-240/50-60	6.23	1/5	108.73
040518	FG75HAK	H/M/LBP	220-240/50	7.95	1/4	111.13
040521	FG85HAK	H/M/LBP	220-240/50	9.05	1/4	114.84
040527	FFI10HAK	H/M/LBP	220-240/50-60	9.05	1/4	121.31
040530	FFI12HBK	H/M/LBP	220-240/50	11.15	1/3	137.60

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, PDF, HERMETIC COMPRESSORS AND SPARES

Mbsm.pro, Files, Pdf, Compressor, HPY16AAa, 1/4 hp, Danfos

written by rober us | 7 October 2023



Private Picture Copyright : WWW.MBSM.PRO


- Compresseur hermétique Cubigel – Huayi Modèle HPY16AAA (LBP) R600 220-240V 50Hz 1/4HP Projection 6.5" / 3(S) Capillaire d'expansion $-35\frac{1}{4}C$ $-10\frac{1}{4}C$
- [Mbsm_dot_pro_private_PDF_danfoss_HPY16AAa_R600a_220_50](#)



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, Pdf, Compressor, ATET, ZEM, WHIRLPOOL, R12

written by Lilianne | 7 October 2023



ZEM o/ or WHIRLPOOL					
per/for R600a GAS			230/240 V - 50 Hz		
POTENZA CV. POWER HP.	TIPO / MODELLO TYPE / MODEL	DATI DI PRESTAZIONE - PERFORMANCE DATA			CODICE - CODE CODE - KODE
		KCAL/h	WI	A	
1/10	ASPERA BPM 1058				223 FR 14
1/8	HLM 75AA				223 FR 15
1/6	HQM 90AA				223 FR 16
1/5	HQM 12AA				223 FR 17
1/4	HPY 14AA				223 FR 18

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Files, Pdf, Compressor, ATET, ZEM, WHIRLPOOL, R12

Mbsm.pro, PDF, LG,

compressor, msa43lbeg, 116 w, 1/8 hp, lbp, r134a

written by Lilianne | 7 October 2023



Mbsm.pro, PDF, LG, compressor, msa43lbeg, 116 w, 1/8 hp, lbp

**Mbsm.pro, PDF, Personnel DOC,
Files, DAEWOO COMPRESSOR ,FOR
REFRIGERATOR , 220/240 V ,
R12, jx46lcs5, 1/6 Hp, 127 w,
109 kcal/h, 433 byu/h, lbp,
Jx58lhs5-k, 1/5 Hp, R134A**

written by Lilianne | 7 October 2023

JX46LCS5

AC 220-240V 50Hz (J19)
LRA 4.3 R12 RoHS

THERMALLY PROTECTED
DAEWOO ELECTRONICS Corp.

MADE IN KOREA DAEWOO DC

K90100999

Mbsm.pro, PDF, Personal DOC, Files, DAEW00 COMPRESSOR ,FOR
REFRIGERATOR , 220/240 V , R12, jx46lcs5, 1/6 Hp, 127 w, 109
kcal/h, 433 byu/h, lbp, Jx58lhs5-k, 1/5 Hp, R134A