


# Compressor, Danfoss, Secop, SC18G, 104g8822, 1/2HP, R134A, 685 Litres, Presentoire cokacolla, LBP/HBP

written by Lilianne | 8 May 2021



Private Picture Copyright: [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

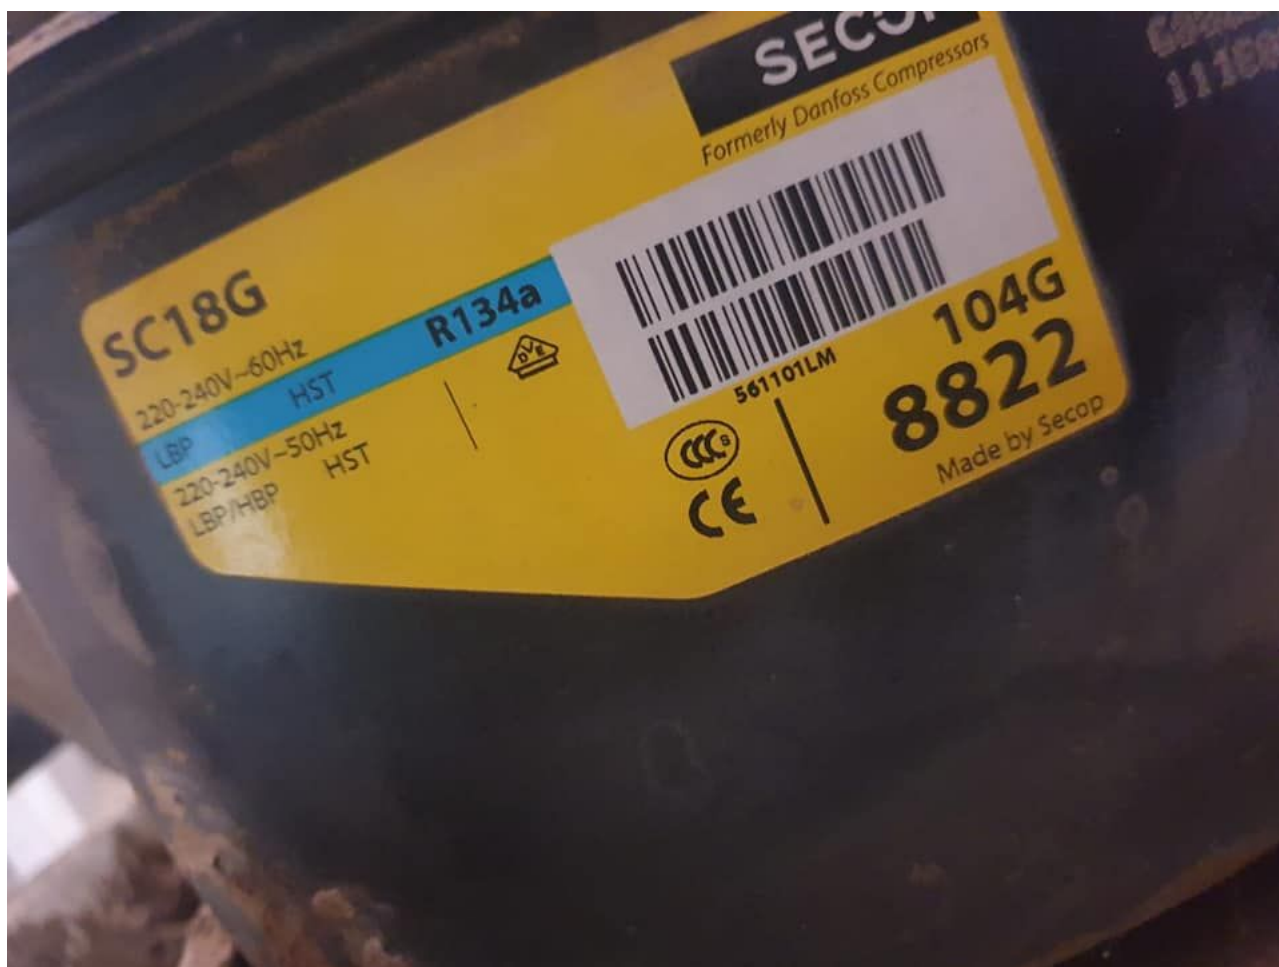

OverviewQuick detailsType :compressorBrand Name :SECOPModel Number : ASC18GCertification :CE, CCCAfter-sales service provided :No overseas service provided.Gas :R134aType :PistonPower Source :AC PowerLubrication Style :LubricatedMute :YesPackage :wooden case or cartonApplication :Danfoss Freezer CompressorDelivery time :7-20 DaysSpecial period :1 monthSupply AbilitySupply Ability3000 Piece / Pieces per MonthPackaging and shippingPackaging Details1.For small order quantity: packed with a wooden case or carton.  
2.For full container: packed with pallet, 24 pallets in one 20ft container.postureGuangZhou, huangpu portProcessing time:: A.7-30 days

### 1.Product name:

1, Danfoss refrigeration / refrigeration compressor SC18G

2.Type: LBP 3.Voltage  
: 220 ~ 240V / 50Hz, 1 / 2HP

No	Model	HP	Temperature	Electricity	Refrigerant
1	SC10C	1/3	LBP	220~240V/50HZ	R22
2	SC12C	3/8	LBP	220~240V/50HZ	R22
3	SC15CM	1/2	LBP	220~240V/50HZ	R22
4	SC18CM	5/8	LBP	220~240V/50HZ	R22
5	SC10D	3/8	MBP	220~240V/50HZ	R22
6	SC12D	1/2	MBP	220~240V/50HZ	R22
7	SC15D	5/8	MBP	220~240V/50HZ	R22
8	SC10G	5/16	MBP	220~240V/50HZ	R22
9	SC12G	1/3	MBP	220~240V/50HZ	R134A
10	SC15G	3/8	MBP	220~240V/50HZ	R134A
11	SC18G	1/2	MBP	220~240V/50HZ	R134A
12	SC21G	5/8	MBP	220~240V/50HZ	R134A
13	SC10CL	1/3	LBP	220~240V/50HZ	R404a
14	SC12CL	3/8	LBP	220~240V/50HZ	R404a
15	SC15CL	1/2	LBP	220~240V/50HZ	R404a
16	SC18CL	5/8	LBP	220~240V/50HZ	R404a
17	SC21CL	7/8	LBP	220~240V/50HZ	R404a

Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

4.Gas consumption: R134a



# Everest

Number	: 1117825	Model	: EV 024 SD		
Volume	: 1.2 CBM	Capacity	: 685 LTRS		
Weight	: 157 KG	Color/Logo	: RED		
Consumption	: 14 kWh/24 hrs	Date	: DEC 2011		
0 Hz	: 50	Ref. Type	: R134A	GRMS	: 475
2 Watt	: 646	Climate Class	: D		
capacity at 0 Deg.C evaporator temperature	: 980				



Wattage of Lamps: 20(TOP) 40(SIDE)

MADE IN EGYPT



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

PARIS 210 (-)



**AHT**

Serialnr 409974 00007779

Gerätedaten  
cabinet data

Innenraumbeleuchtung  
Light inside cabinet

class 3 (25°C/60%rH)

(-)

Nennspannung/frequ. Nom Voltg./frequ.  
Tension/Fréquence nominale

220-240V/50Hz

220-240V/50Hz

Nennaufnahme Nom Consump.  
Prise de courant nominale

480 W

50 W

Nennstrom Nom Current  
Courant nominal

2,6 A

0,21 A

Schutzart Protection class  
Type de protection

IP 21

IP 21

Typ Type

B B25

LE221

Energieaufnahme Energy consump.  
Absorption d'énergie

9,2 kWh/24h

Absicherung Fuse  
Protection par fusibles

16 A

Kältemittel(Menge) Refrigerant(Quan)  
Type / Quantité de réfrigérant

R404A/0,250 kg

Nettoinhalt Net Content  
Capacité nette

724 dm<sup>3</sup>

Lampe Lamp

max. zul. Betriebsüberdruck 30 bar  
Eigensicher nach VVV-VBG 20, § 7.3  
Dichtheit geprüft

Suppression max. de service admise  
Sécurité propre selon VVV-VBG 20  
Imperméabilité examinée



**ENTSORGUNGSHINWEIS**

**WÄRMEDÄMMSTOFF: PU MIT PENTAN**

Das Gerät nicht dem normalen Müll, sondern in einem für diesen Zweck vorgesehenen Behälter zur Sonderentsorgung zuführen.

Darauf achten, daß dabei die Rohrleitungen nicht beschädigt werden.

**DISPOSAL**

**THERMAL INSULATION: PU WITH PENTAN**

The cabinet is not standard waste but has to be disposed of in a special container according to the regulations with local waste disposal authorities.

Make sure that the tubes are not damaged.

**MISE AU REBUT**

**ISOLATION THERMIQUE: PU AVEC PENTANE**

Votre bahut n'est pas de rebut ordinaire. Il doit être traité dans un conteneur spécial conformément aux consignes locales de la mise au rebut.

Faites attention de ne pas endommager les conduites.



---

# **R134A, LBP, Motor, Danfu, Compressor, PW2.0VK, 1/15hp**

written by Lilianne | 8 May 2021



R134A, LBP, Motor, Danfu, Compressor, PW2.0VK, 1/15hp

---

# **LG, Refrigerator, Compressor, FC75LBNA, TCA35271202, Inverter, AR125VC, R134A, 1/3hp, 0-220V 53HZ**

written by Lilianne | 8 May 2021



LG, Refrigerator, Compressor, FC75LBNA, TCA35271202, Inverter, AR125VC, R134A, 1/3hp, 0-220V 53HZ

---

# **Medium and High Back Pressure**

**Compressors, M/HBP, RSIR,  
TECUMSEH, 1/5++ HP, R134a,  
160g, TWB1374YGS, TW146GY,  
220v/50-60, kiriazi defrost,  
340L, k350, k350/1, Embraco,  
ff17.5hak, tw146-gy-486,  
twb1374ygs**

written by Lilianne | 8 May 2021

Medium and High Back Pressure Compressors, M/HBP, RSIR,  
TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY,  
220v/50-60, kiriazi defrost, 340L, k350, k350/1, Embraco,  
ff17.5hak, tw146-gy-486, twb1374ygs

---

**no frost, egl99aa zmc  
refrigerator, DF40, silver,  
ideal, zanussi, IDEAL  
ZANUSSI, EGL99AA ZMC, DF 40  
Elgance, Compressor, ACC  
Cubigel, Huayi, Electrolux,**

# ZEM GL99AA, GL99AA, LBP , R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A

written by Lilianne | 8 May 2021



Mbsm\_dot\_pro\_private\_PDF\_GL99AA-compresseur-acc-cubigell-  
gl99aaTélécharger

Mbsm\_dot\_pro\_private\_PDF\_GL99AATélécharger

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP – R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm<sup>3</sup>, motor type RSIR, LRA 14.4A, expansion device: capillary, cooling: static, weight 11 kg , the statutory warranty period shall apply (24 months), Delivery time Info: with “immediately available” and “scarce stock”, usually delivery within 2 days. For “currently not available” delivery time usually 2 weeks or delivery time in urgent cases contact us.

---

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL

Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions ( length × width × height ):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR
COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F

Pressure line (mm):	4,9
Suction line (mm):	6,5



**GL99AAa VE09**  
**220-240V 50Hz ~1**

**COMPRESSOR**

Displacement (cm <sup>3</sup> )	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm <sup>3</sup> )	295

**MOTOR**

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

**APPLICATION**

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

**NOMINAL PERFORMANCE**

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

**TEST CONDITIONS**

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

**ELECTRICAL COMPONENTS**

Relay	PTC 3003 - K100
Nominal voltage (V)	200 - 240
Resistance μ	14.00
Protector	MRP336JZ      T0377      AE11FU





Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

x

x

x


---

**RÉFRIGÉRATEUR**

**NIKAI,**

# nrf480fn4, 165W, Compressor, ATD60L, Wanbao Huaguang Refrigerator, 1/5Hp, R134A, 120G, 1.25A, 220V/50HZ

written by Lilianne | 8 May 2021

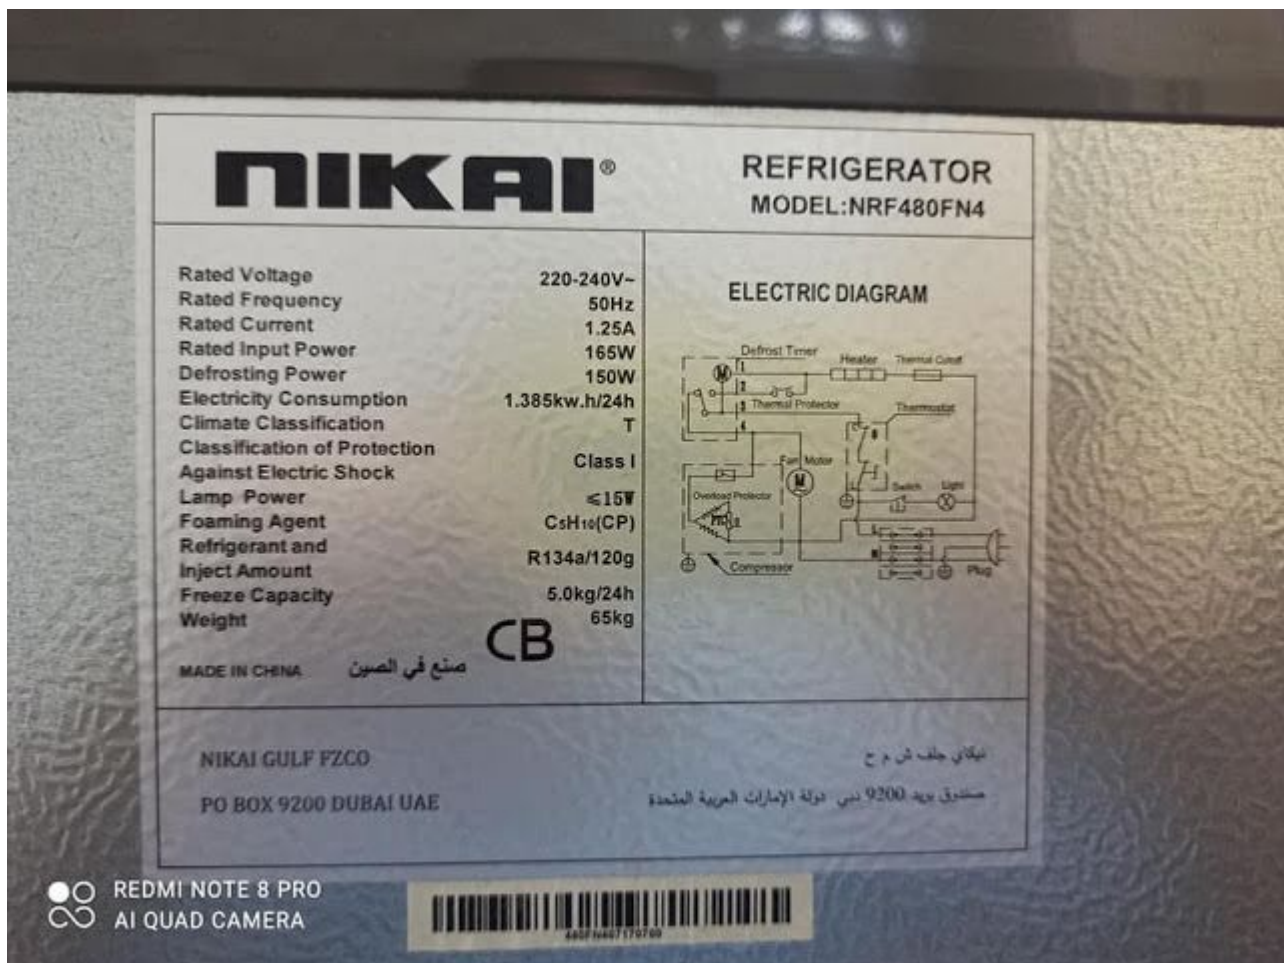

RÉFRIGÉRATEUR NIKAI, nrf480fn4, 165W, Compressor, ATD60L, Wanbao Huaguang Refrigerator, 1/6Hp, R134A, 120G, 1.25A, 220V/50HZ



# Cubigel Compressors, Compressor, GQY80AT, 1/4Hp, LBP, R134a, 8.1cmc,165 W, REFRIGERATEUR INDESIT

written by Lilianne | 8 May 2021

Compresor GQY80AT, freon R134a, capacitate 8.1  
cmc, capacitate frigorifica ASHRAE 222 W, capacitate  
frigorifica CECOMAF 165 W, racire statica #GQY80AT

Model: GQY80AT

Freon: R134a

Capacitate: 8.1 cmc

Capacitate frigorifica ASHRAE: 222 W

Capacitate frigorifica CECOMAF: 165 W

35 -30 -25 -10 w COP

• 451.00.3301 GD40AAa / GUY40AA 1/10 S 4.03 34 49 70 0.77 154  
C 200 6.7 RSIR P •

451.00.3202 GD40AA 1/10 S 4.03 34 49 70 0.77 154 C 200 6.7  
RSIR P •

• 451.00.3302 GL45AA / GUY44AA 1/8 S 4.55 37 56 81 0.81 183 C  
265 8.3 RSIR P •

• 451.00.3303 GL60AA / GUY57AA 1/6 S 5.99 50 75 107 0.85 238 C  
265 9.1 RSIR P •

• 451.00.3304 GL75AA / GUY66AA 1/5 S 6.65 57 85 121 0.87 267 C  
345 9.6 RSIR P •

• 451.00.3305 GL80AA / GUY75AA 1/5 S 7.52 68 101 144 0.89 326  
C 345 9.9 RSIR P •

451.00.3104 GL80AAb 1/5 OC 8.10 68 101 144 0.89 326 C-V 345  
9.9 CSIR R •

451.00.3005 GL90AA 1/4 S 9.08 82 119 165 0.90 350 C 345 10.2  
RSIR P •

• 451.00.3306 GL90AAa / GQY80AT 1/4 S 9.08 82 119 165 0.90 350  
C 345 10.2 RSIR P •

451.00.3105 GL90AAb 1/4 OC 9.08 82 119 165 0.90 350 C-V 345  
10.2 CSIR R •  
• 451.00.3205 GL90AAb 1/4 F 9.08 82 119 165 0.90 350 C-V 345  
10.2 CSIR R •  
• 451.00.3325 GL90AAa 1/4 OC 9.08 82 119 165 0.90 350 C-V 345  
10.2 CSIR R •  
451.00.3106 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400 11.5  
RSIR R •  
• 451.00.3206 GP12FB 1/3 F 12.00 83 131 190 0.88 424 C 400  
11.5 RSIR R •  
• 451.00.3326 GP12BB 1/3 OC 12.00 83 131 190 0.88 424 C 400  
11.5 RSIR R •  
451.00.3218 GP14CB 3/8 F 14.17 99 158 228 0.90 509 C 400 11.5  
RSIR R •  
451.00.3223 GP16FB 3/8 F 16.15 109 182 266 0.89 585 C-V 530  
12.0 CSIR R •  
451.00.3224 GX18FB 3/7 F 18.40 123 199 291 0.91 660 C-V 500  
15.1 CSIR R •  
451.00.3225 GX21FB 2/3 F 20.72 151 243 351 0.93 778 C-V 500  
15.5 CSIR R •  
  
451.00.3403 GL45TB 1/6 F 4.50 76 134 342 1.62 412 C-V 300 8.4  
CSIR R •  
• 451.00.3503 GL45PB 1/6 F 4.50 76 134 342 1.62 412 C-V 300  
8.4 CSIR R •  
451.00.3404 GL60TB 1/5 F 5.67 95 170 437 1.82 527 C-V 300 9.5  
CSIR R •  
• 451.00.3504 GL60PB 1/5 F 5.67 95 170 437 1.82 527 C-V 300  
9.5 CSIR R •  
451.00.3406 GL80TB 1/5 F 7.57 111 212 554 1.83 667 C-V 300 9.5  
CSIR R •  
• 451.00.3505 GL90TB 1/4 F 8.85 142 259 661 1.91 796 C-V 300  
10.8 CSIR R •  
• 451.00.3506 GP12TB 3/8 F 12.05 169 338 893 1.80 1077 C-V 350  
11.2 CSIR R •  
451.00.3418 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400  
11.5 CSIR R •

- 451.00.3513 GP14TB 3/8 F 14.00 190 373 999 1.77 1208 C-V 400  
11.5 CSIR R •
- 451.00.3419 GX18TB 1/2 F 18.40 285 539 1390 1.91 1673 C-V 500  
16.0 CSIR R •
- 451.00.3420 GX21TB 5/8 F 20.72 332 603 1550 1.90 1866 C-V 500  
17.0 CSIR R •
- 451.00.3421 GX23TB 5/8 F 23.20 368 677 1730 1.89 2083 C-V 500  
17.0 CSIR R •
- 451.00.3422 GS26TB 3/4 F 25.93 392 771 2071 2.09 1011 C-V  
887 22.7 CSIR R •
- 451.00.3423 GS30TB 7/8 F 29.95 317 785 2452 2.33 3020 C-V 887  
22.7 CSR R •
- 451.00.3424 GS34TB 1 F 34.42 476 1068 2852 2.28 3421 C-V 887  
22.7 CSR R •



Private Picture Copyright : [WWW.MBSM.PRO](http://WWW.MBSM.PRO)

- 
- 
- 
- 
- 
- 
- 
- 
- 

Mbsm\_dot\_pro\_private\_PDF\_GQY80ATTélécharger

---

# Compressor, ROHS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

written by Lilianne | 8 May 2021



Private Picture Copyright: WWW.MBSM.PRO

## Basic Info.

Model NO.  
CAE4448Y  
Refrigerant Type  
Ammonia  
Refrigerant

R134A  
Voltage  
208V/50Hz 230V/60Hz  
Horsepower  
1/3HP  
Capacity(W)  
519W  
Input Power(Kw)  
400W  
Oil Charge (Cm3)  
450  
Net Weight(Kg)  
12kg  
Cop(W/W)  
1.64  
Trademark  
tecumseh  
Transport Package  
Wooden Box  
Specification  
208V/50HZ 230V/60HZ  
Origin  
France  
HS Code  
8414309010

**1/3HP HBP Original Made in France R134A Tecumseh Compressor  
CAE4448Y Refrigerator Compressor For  
Refrigerator/Showcase/Cold Room  
Product Description**

**Model: CAE4448Y**

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

**Description rapide**

Condition:	Nouveau	Type:	Piston
Configuration:	Stationnaire	Source d'énergie:	Alimentation AC
Modèle de lubrifica...	Lubrifié	Muet:	Oui
Point d'origine:	Guangdong, China	Marque nom:	tecumseh
Numéro de Type:	CAE4448Y	Tension:	208 ~ 220V/1PH/50HZ
Dimension (L*W*H):	1 unité	Poids:	20kg
Certification:	ROHS	Garantie:	1 année
Service après-vente...	Aucun service d'outre-mer fourni	Gaz:	R134a
Chevaux:	1/3HP		

Private Picture Copyright: WWW.MBSM.PRO

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	254	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3

Private Picture Copyright: WWW.MBSM.PRO

**Basic Info.**

Model NO.	CAE4448Y	Refrigerant Type	Ammonia
Refrigerant	R134A	Voltage	208V/50Hz 230V/60Hz
Horsepower	1/3HP	Capacity(W)	519W
Input Power(Kw)	400W	Oil Charge (Cm3)	450
Net Weight(Kg)	12kg	Cop(W/W)	1.64
Trademark	tecumseh	Transport Package	Wooden Box
Specification	208V/50HZ 230V/60HZ	Origin	France
HS Code	8414309010		

Private Picture Copyright: WWW.MBSM.PRO

# **HERMETIC, Freezer, COMPRESSOR, ZEL, GTH86AA, R134A, 1/4 Hp, Lbp, 230W, 8.6CC**

written by Lilianne | 8 May 2021

## **COMPRESSOR ZEL GTH86AA**

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

## **Specifications**

### **Description**

#### **Detailed Product Description**

- 1.Low levels of noise and vibration
- 2.Standard,medium,high and very high levels of efficiency



R134a 220-240V/50HZ										
Model	Displ. (cm <sup>3</sup> )	Motor Type	Cooling capacity(w)	Input Power		COP		Run Capacltor	Start Capacltor	Height (mm)
				without RC(w)	with RC(w)	without RC(w/w)	with RC(w/w)			
<b>Standard Efficiency Range</b>										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
<b>Medium Efficiency Range</b>										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183



---

**Compressor, NL7.3FT, SECOP,  
105G6726, DANFOSS, 6726,  
105G, 105 G 6726, 105G 6726,  
1/5 HP, 180W, LBP, Zanussi,  
Kiriazi Electric Company, TGV  
335L, NO FROST, TSV 320L, FC  
83L , R134A, 125G, 220-240V  
50Hz, CSIR**

written by Lilianne | 8 May 2021

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low

temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

<b>Type de gaz</b>	<b>App</b>	<b>HP</b>	<b>Watt</b>	<b>Modèle</b>	<b>TL</b>
<b>R134A</b>	<b>LBP</b>	<b>1/6</b>	<b>134</b>	<b>TLY5.1FK</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>183</b>	<b>TLES7FT.4</b>	

<b>R134A</b>	<b>LBP</b>	<b>1/5</b>	<b>156</b>	<b>NL6FT.2</b>	<b>NL</b>
<b>R134A</b>	<b>LBP</b>	<b>1/5</b>	<b>185</b>	<b>NL7.3FT (RSIR)</b>	
<b>R134A</b>	<b>LBP</b>	<b><sup>+</sup> 1/4</b>	<b>219</b>	<b>NL9FT.2 (RSIR)</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>185</b>	<b>NL7.3FT (CSIR)</b>	
<b>R134A</b>	<b>LBP</b>	<b><sup>+</sup> 1/4</b>	<b>219</b>	<b>NL9FT.2 (CSIR)</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/3</b>	<b>284</b>	<b>NL10FT</b>	
<b>R134A</b>	<b>MBP</b>	<b>1/3</b>	<b>621</b>	<b>NL11MF</b>	
<b>R404A</b>	<b>LBP</b>	<b>1/3</b>	<b>433</b>	<b>NL7CLX</b>	
<b>R404A</b>	<b>LBP</b>	<b>1/3</b>	<b>471</b>	<b>NL8.4CLX</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/4</b>	<b>187</b>	<b>NLY6F</b>	
<b>R134A</b>	<b>LBP</b>	<b><sup>+</sup> 4 / (1)</b>	<b>213</b>	<b>NLY7F</b>	
<b>R134A</b>	<b>LBP</b>	<b>1/3</b>	<b>237</b>	<b>NLY9FK</b>	
<b>R600A</b>	<b>LBP</b>	<b><sup>+</sup> 1/4</b>	<b>227</b>	<b>NLE13KTK.2</b>	
<b>R600A</b>	<b>LBP</b>	<b>1/3</b>	<b>253</b>	<b>NLE15KTK.2</b>	
<b>R600A</b>	<b>LBP</b>	<b><sup>+</sup> 1/4</b>	<b>225</b>	<b>NLX13KK.3</b>	
<b>R600A</b>	<b>LBP</b>	<b>1/3</b>	<b>254</b>	<b>NLX15KK.3</b>	

<b>R134A</b>	<b>LBP / MBP / HBP</b>	<b>1/3</b>	<b>264</b>	<b>SC12G</b>	<b>SC</b>
<b>R134A</b>	<b>LBP / MBP / HBP</b>	<b>1/2</b>	<b>392</b>	<b>SC18G</b>	
<b>R134A</b>	<b>LBP / MBP / HBP</b>	<b>3/4</b>	<b>456</b>	<b>SC21G</b>	
<b>R134A</b>	<b>MBP</b>	<b>3/4</b>	<b>1073</b>	<b>SC21MFX</b>	
<b>R134A</b>	<b>LBP</b>	<b>3/4</b>	<b>567</b>	<b>SC21FTX</b>	
<b>R404A</b>	<b>LBP</b>	<b>1</b>	<b>1033</b>	<b>ST21CL</b>	
<b>R404A</b>	<b>LBP</b>	<b>1</b>	<b>986</b>	<b>SC18CLX.2</b>	
<b>R404A</b>	<b>MBP</b>	<b>1/2</b>	<b>359/650</b>	<b>SC15MLX</b>	
<b>R404A</b>	<b>MBP</b>	<b>7/8</b>	<b>762/1584</b>	<b>SC18MLX</b>	

# KIRIAZI



# CE



ELECTRIC  
COMPANY

®

Product

No Frost Refrigerator

Class

T

Model

E 335N/3

Current / Amp.

1.1/~

Rated Voltage

220-240V/50HZ

Refrigerant

R 134a

125g

Rated input of lamp

1 x 25 W

Total Gross Volume

335 L

Ins : Basic

Type II

IPX4

Total Storge Volume

320 L

Freezing Capacity

4 kg/24hr

Freezer Capacity

83L

ES 6000 / 2008  
ES 3793 / 2006

Tow Door Ref.

Serial Number

Made in Egypt



REDMI NOTE 8  
AI QUAD CAMERA



● ○ REDMI NOTE 8  
∞ AI QUAD CAMERA



Mbsm\_dot\_pro\_private\_PDF\_NL7.3FTTélécharger  
Mbsm\_dot\_pro\_private\_PDF\_nl73ft\_105g6731\_r134a\_220v\_50hz\_11-20  
11\_desd406c102Télécharger





model	watt	HP	LBP/MBP	نوع ٻڌڻ	توضيحات
SC12G	246	1/2	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	جھنگرين SC21G
SC21FTX	567	3/4	LBP	134	جھنگرين SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/8	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سٺا NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	جھنگرين SC12G (ٻارو و ٻارو)
NL11MF	621	1/3	MBP	134	جھنگرين SC12G (ٻارو و ٻارو)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سٺا NL7 - High efficiency (ٻارو)
NLY7F	213		LBP	134	سٺا NL9 - High efficiency (ٻارو)
NLY9FK	237		LBP	134	High efficiency (ٻارو)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -23.3°C ASHRAE) زير سٺا  
(MBP @ -4.7°C ASHRAE) ٻارو سٺا