

Mbsm.pro, compressor, Secop, GTK55AT, 170W, R134, LBP, 1/5 HP, RSIR, 579 BTU

Category: compressor

written by Lilianne | 22 August 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, compressor, Secop, GTK55AT, 170W, R134, LBP, 1/5 HP, RSIR, 579 BTU

Mbsm.pro, Refrigerator, Fridge-Freezer, RT511JSPN, No Frost, Samsung, 441 L, 309 L, Compressor, Mk172Q-L2U, 1/4 Hp, 205 W, 699 BTu/H, Samsung Compressor, Mk Serie, R134A, 7.21 cc, 220-240 v, LBP, Static Compressor, RSIR

Category: Refrigerator

written by Lilianne | 22 August 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Refrigerator, Fridge-Freezer, RT511JSPN, No Frost, Samsung, 441 L, 309 L, Compressor, Mk172Q-L2U, 1/4 Hp, 205 W, 699 BTu/H, Samsung Compressor, Mk Serie, R134A, 7.21 cc, 220-240 v, LBP, Static Compressor, RSIR

Mbsm.pro, Compressor, QBH73C13GAE,

1/4 hp, RSIR, Reciprocating Compressors, Fixed Speed, Q Series, R134a, LBP

Category: compressor

written by Lilianne | 22 August 2022



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, QBH73C13GAE, 1/4 hp, RSIR, Reciprocating Compressors, Fixed Speed, Q Series, R134a, LBP

Mbsm.pro, Compressor, D77C18RAX5, RSIR , 1/4 Hp, D Series, r134a, LBP, 186 W, Toshiba, Refrigerator, 14 Feet, GR-EF40, 2 Doors, New Compressor, PE75H1C, 250 w, 1/4 hp

Category: compressor

written by Lilianne | 22 August 2022

Performance

Application : Low Back Pressure

Refrigerant : R134a (CF₃CH₂F)

Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, D77C18RAX5, RSIR , 1/4 Hp, D Series, r134a, LBP, 186 W, Toshiba, Refrigerator, 14 Feet, GR-EF40, 2 Doors, New Compressor, PE75H1C, 250 w, 1/4 hp

Mbsm.pro, Compressor, B43H, HUAYI, 1/7 Hp, LBP, ACC, CUBIGEL, Danfoss, RSIR , r134a

Category: compressor

written by Lilianne | 22 August 2022



HUAYI

B43H

R134a

220-240V~50/60Hz (5)



A008210



HUAYI COMPRESSOR(JINGZHOU)CO.,LTD.

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, B43H, HUAYI, 1/7 Hp, LBP, ACC, CUBIGEL, RSIR , r134a

Mbsm.pro, Compressor, Embraco, Aspera, EMY26CLC, LBP, R600a, 220 – 240V/1/50Hz, 1/12 HP, RSIR, LRA 7.8 A, 83 Wat

Category: compressor

written by Lilianne | 22 August 2022



Private Picture Copyright: WWW.MBSM.PRO

Compressor, Embraco, Aspera, EMY26CLC, LBP, R600a, 220 – 240V/1/50Hz, 1/12 HP, RSIR, LRA 7.8 A, 83 Wat

Mbsm.pro, Motor, compressor, type, RSIR, RSCR, CSIR, CSCR, PSC

Category: compressor

written by Lilianne | 22 August 2022

(1) RSIR

Resistance start induction run

(2) RSCR

Resistance start capacitor run

(3) CSIR

Capacitor start induction run

(4) CSCR/CSR

Capacitor start capacitor run

(5) PSC

Permanent split capacitor

(1) RSIR

Resistance start induction run

(2) RSCR

Resistance start capacitor run

(3) CSIR

Capacitor start induction run

(4) CSCR/CSR

Capacitor start capacitor run


(5) PSC

Permanent split capacitor

Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Compressor Windings

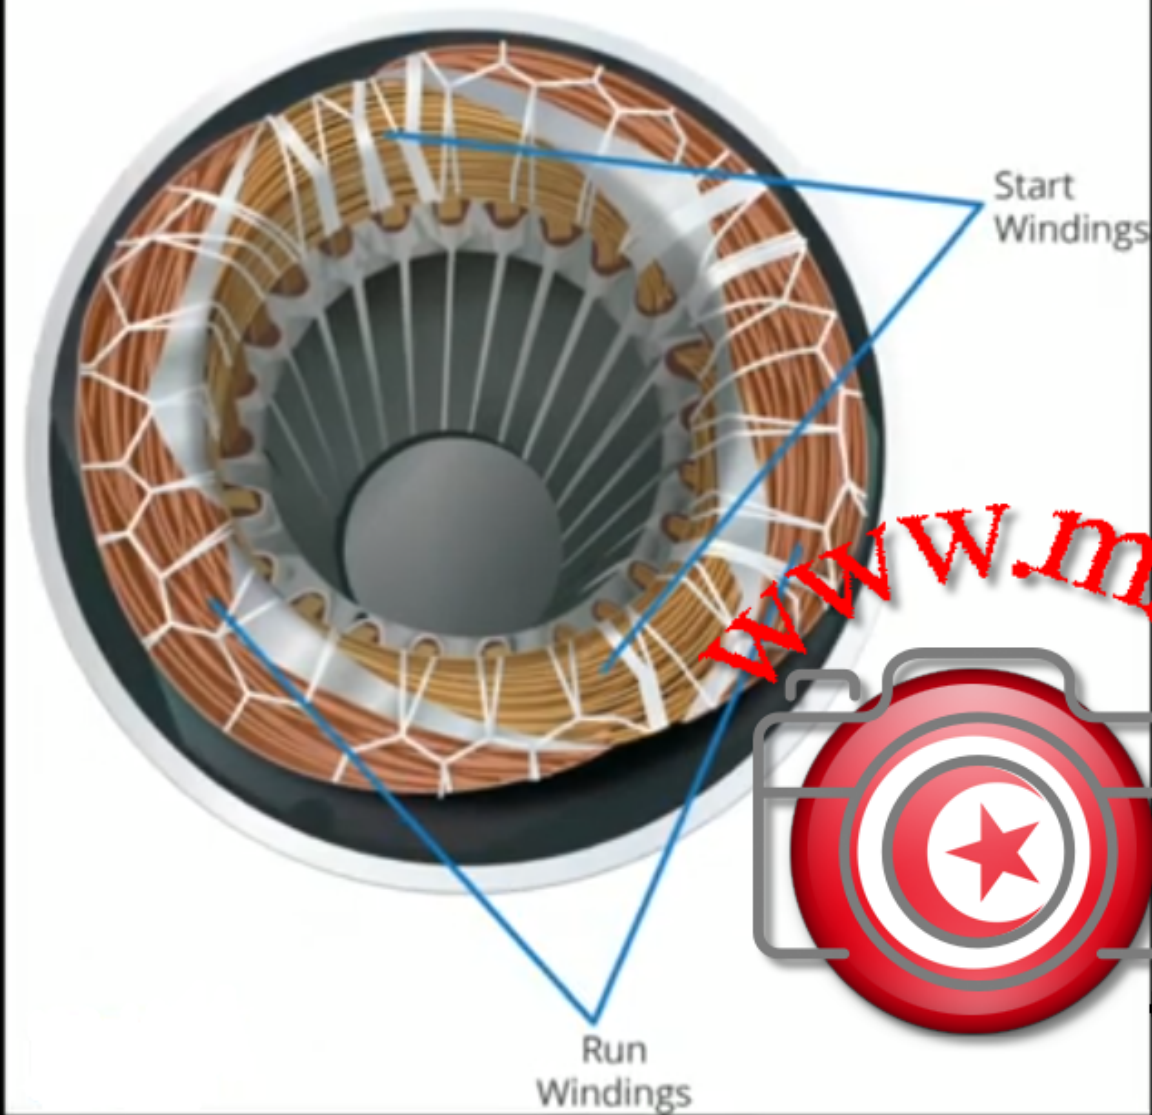


Private Picture Copyright: WWW.MBSM.PRO




(1) RSIR
Resistance start induction run

Private Picture Copyright: WWW.MBSM.PRO

RSIR

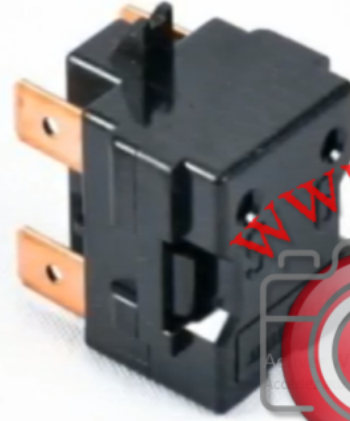

Private Picture Copyright: WWW.MBSM.PRO

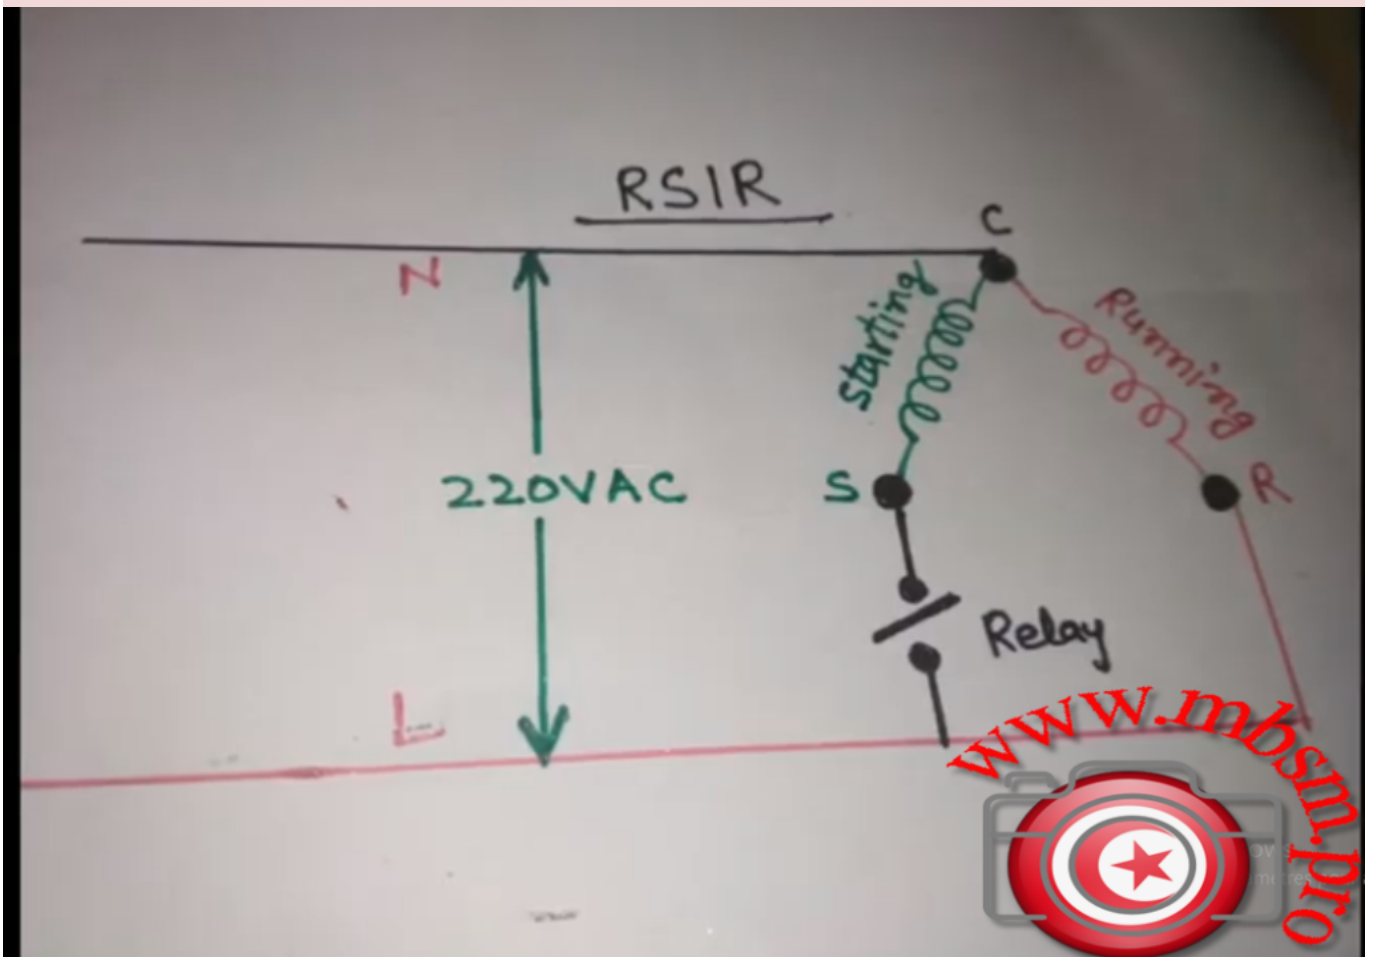

Private Picture Copyright: WWW.MBSM.PRO


(2) RSCR Resistance start capacitor run

Private Picture Copyright : WWW.MBSM.PRO

RSCR



Private Picture Copyright : WWW.MBSM.PRO

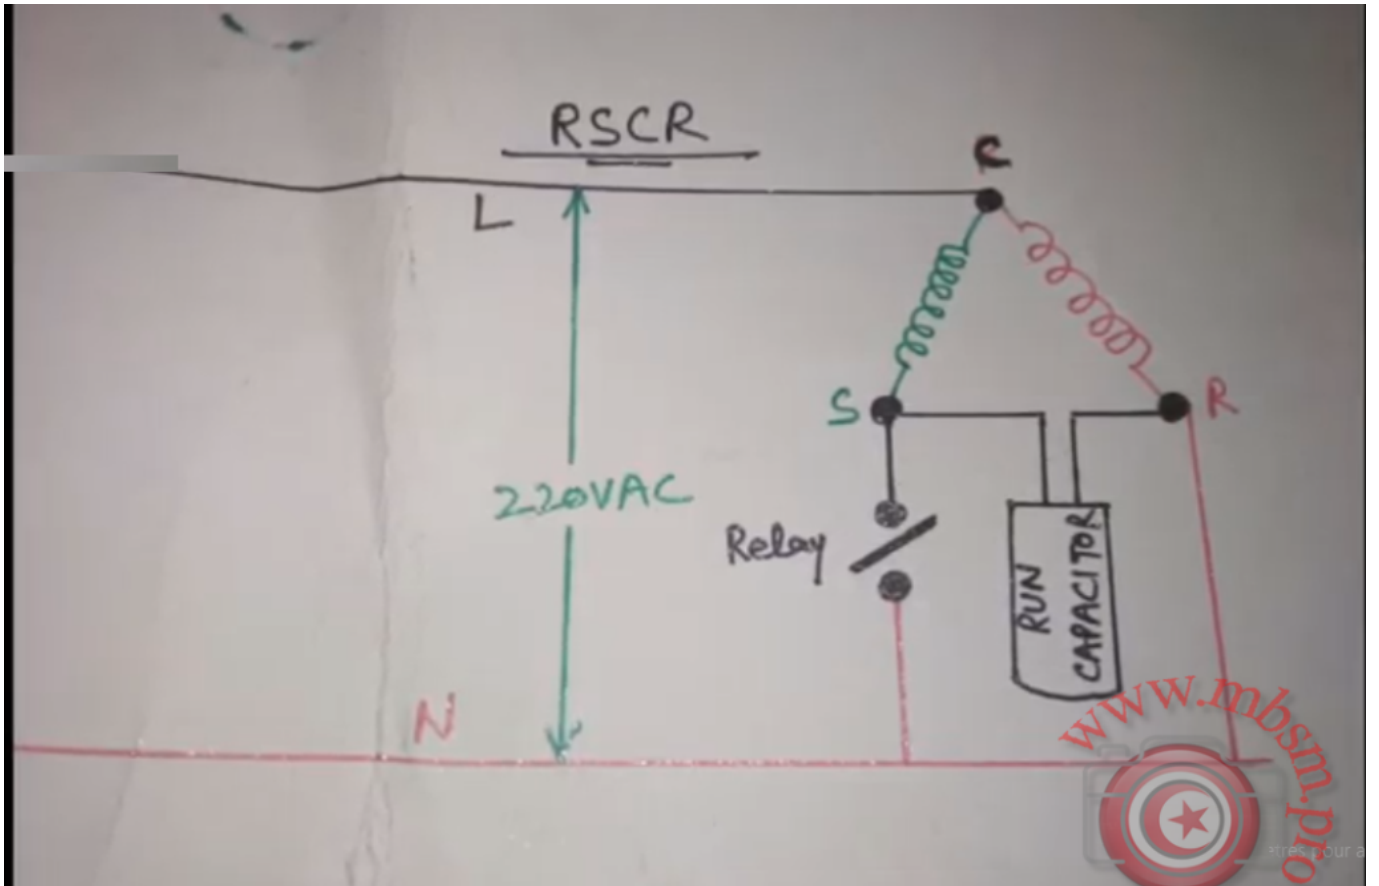

Private Picture Copyright: WWW.MBSM.PRO


(3) CSIR Capacitor start induction run

Private Picture Copyright: WWW.MBSM.PRO

CSIR



Private Picture Copyright: WWW.MBSM.PRO

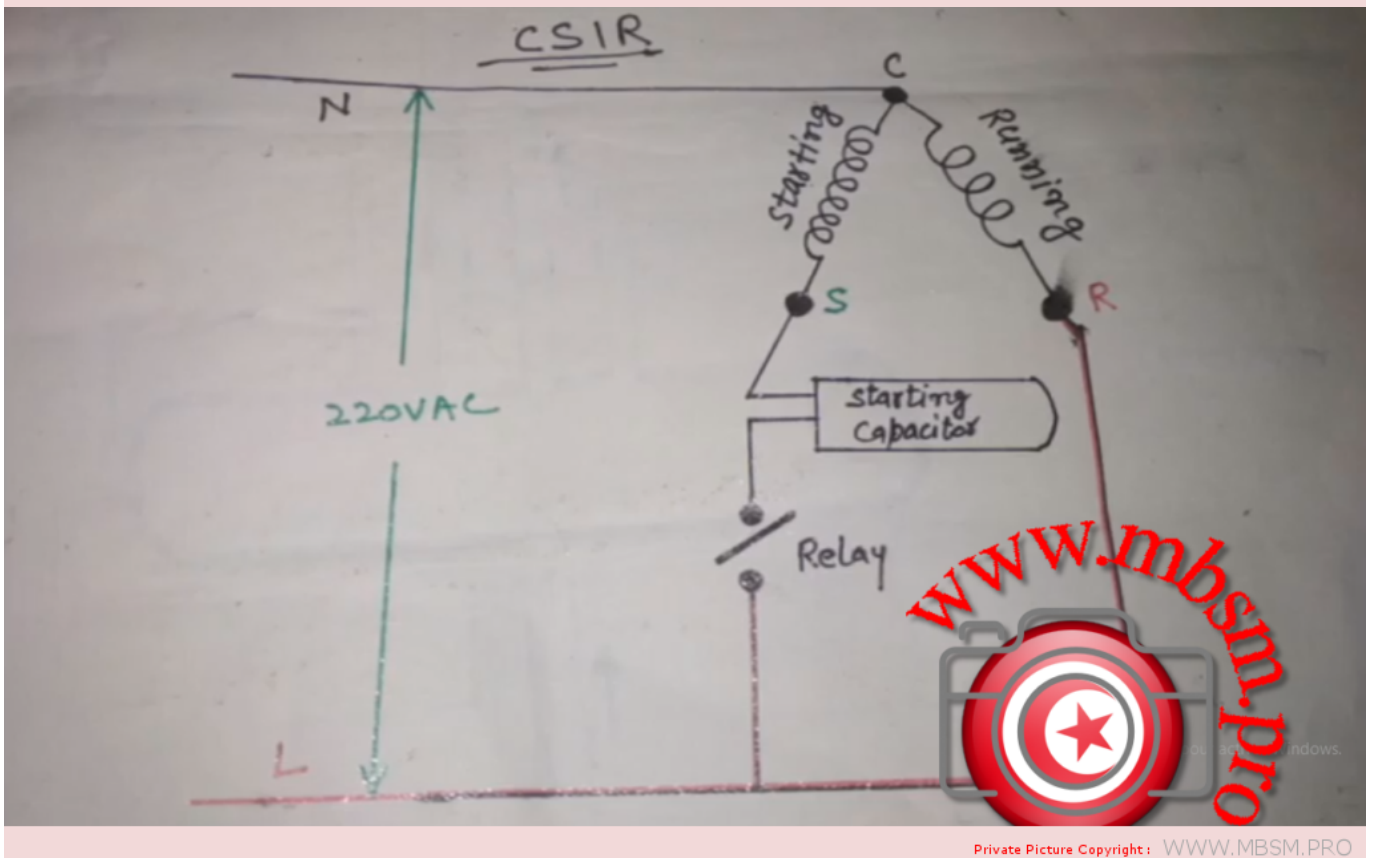

Private Picture Copyright: WWW.MBSM.PRO




(4) CSCR/CSR Capacitor start capacitor run

Private Picture Copyright: WWW.MBSM.PRO

CSCR/CSR



Private Picture Copyright: WWW.MBSM.PRO

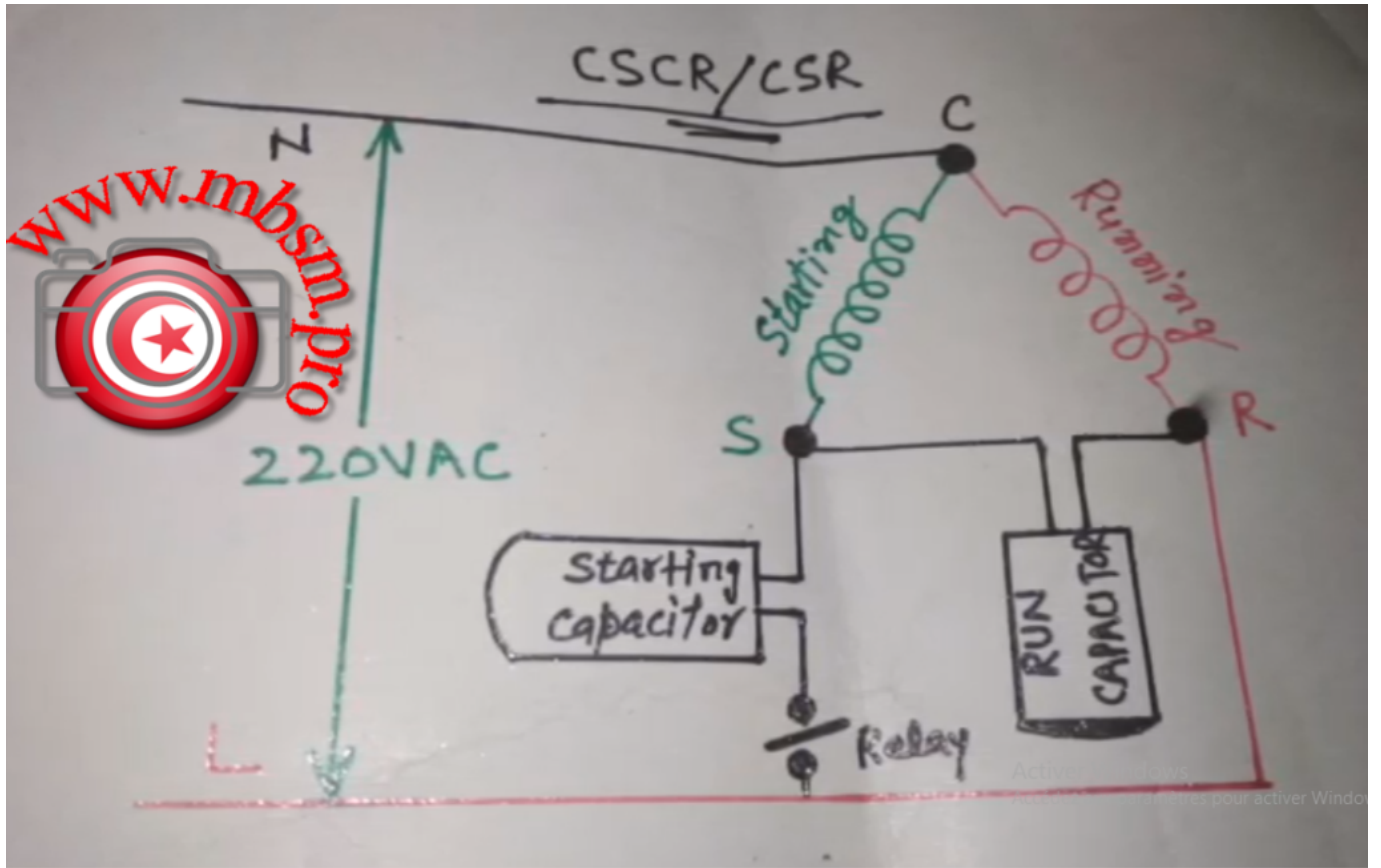

Private Picture Copyright: WWW.MBSM.PRO


(5) PSC Permanent split capacitor

Private Picture Copyright: WWW.MBSM.PRO

PSC



Private Picture Copyright: WWW.MBSM.PRO

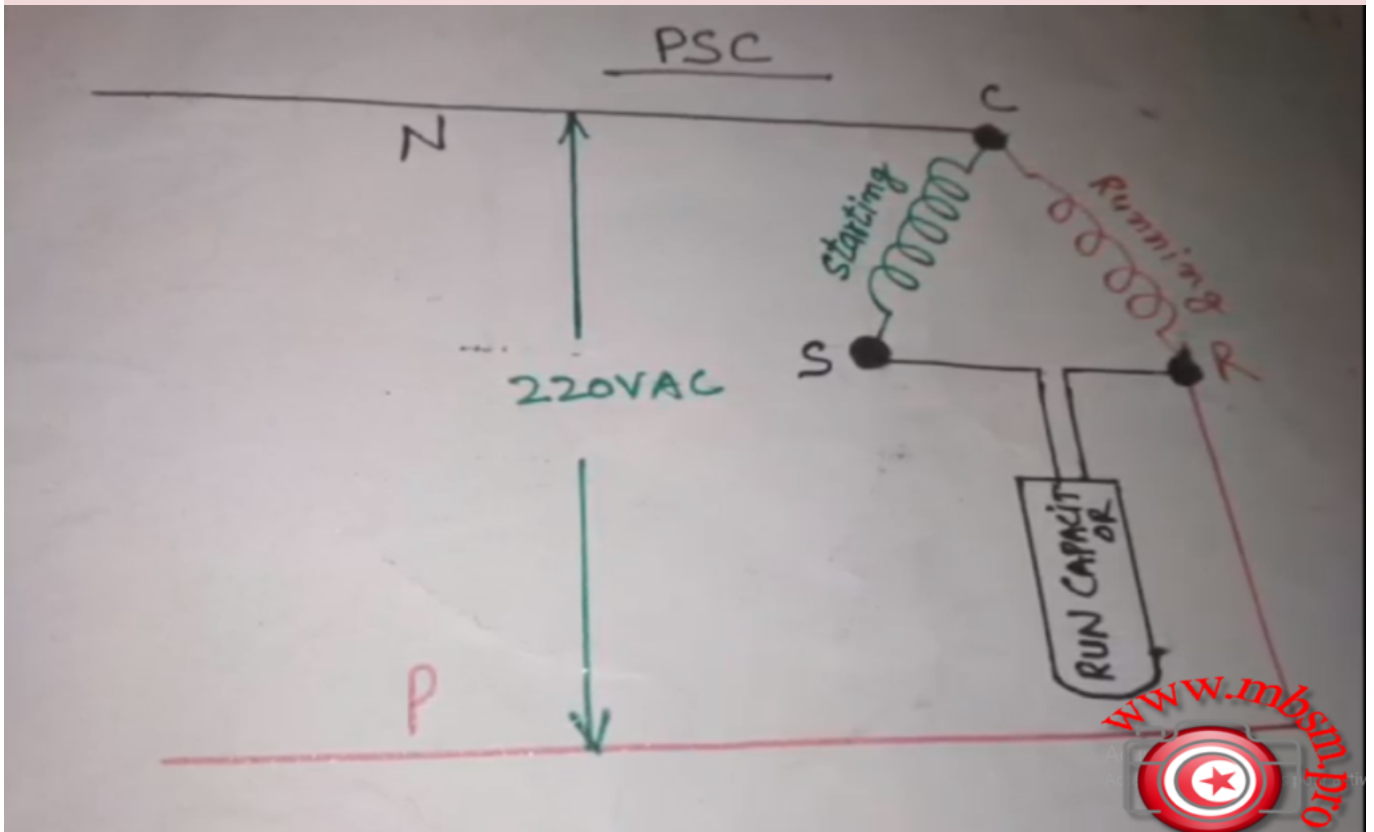

Private Picture Copyright: WWW.MBSM.PRO

Best quality Chinese Brand, 3/8HP, R134A compressor, refrigerator, QD128H, 260W, RSIR, copper wire compressor, LBP, 220-240V/50Hz, 325W cooling capacity

Category: compressor

written by Lilianne | 22 August 2022



Private Picture Copyright: WWW.MBSM.PRO

Best quality Chinese Brand, 3/8HP, R134A compressor, refrigerator, QD128H, 260W, RSIR, copper wire compressor, LBP, 220-240V/50Hz, 325W cooling capacity

Medium and High Back Pressure Compressors, M/HBP, RSIR, TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY, 220v/50-60, kiriazi defrost,

340L, k350, k350/1, Embraco, ff17.5hak, tw146-gy-486, twb1374ygs

Category: compressor

written by Lilianne | 22 August 2022

Medium and High Back Pressure Compressors, M/HBP, RSIR, TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY, 220v/50-60, kiriazi defrost, 340L, k350, k350/1, Embraco, ff17.5hak, tw146-gy-486, twb1374ygs

Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

Category: compressor,Files

written by Lilianne | 22 August 2022

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up.

Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.



Private Picture Copyright : WWW.MBSM.PRO

Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.


Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.




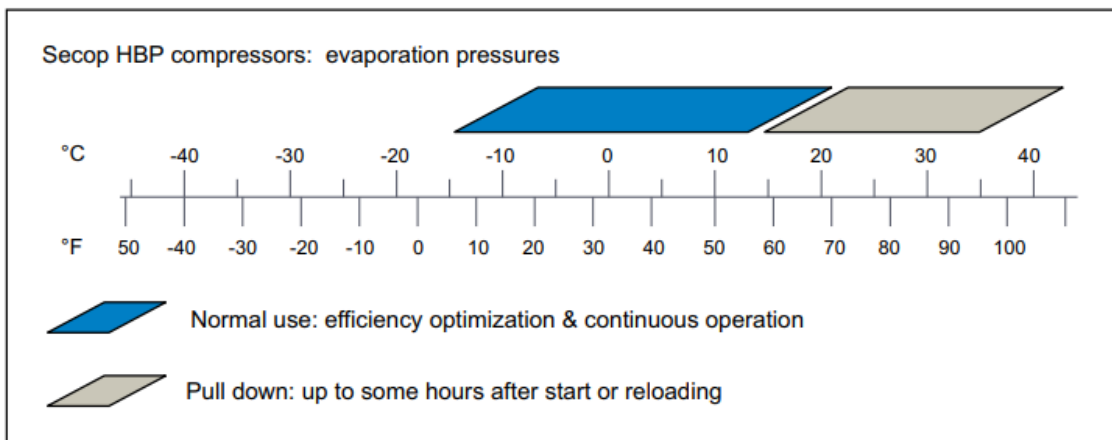


Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

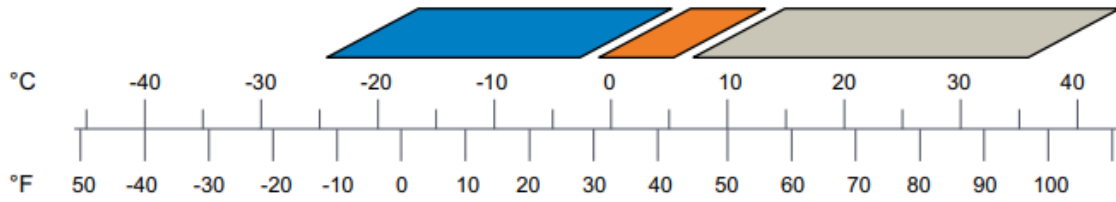Secop MBP compressors: evaporation pressures







-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: up to some hours after start or reloading



Private Picture Copyright : WWW.MBSM.PRO

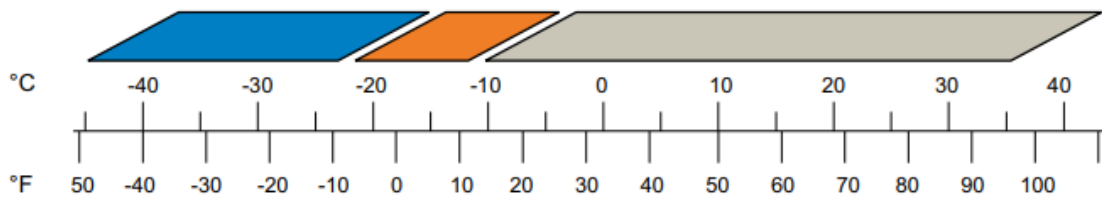Secop LBP compressors: evaporation pressures



-  Normal use: efficiency optimization & continuous operation
-  High load: continuous operation
-  Pull down: short time operation (<60min.) after start or defrost



Private Picture Copyright : WWW.MBSM.PRO