

COMPRESSEUR, EMBRACO, ASPERA, NEK6213GK, HMBP, 1/2+ hp, 614 W

written by Lilianne | 4 January 2021

- Puissance frigorifique à -10°C 1305 W
- Puissance électrique à -10 °C 614 W
- Puissance en cheval 1/2+ CV
- Alimentation 220-240 V 50 Hz
- Gaz R404a/R507 HMBP
- Moyenne et haute pression
- Complet avec starter, condensateur, boîtier et système de fixation

Codes fabricants

- ALPENINOX (anciennement NE9213GK)
- ASCASO-VF.792 (anciennement NE9213GK)
- ASPERA-NE9213GK (anciennement NE9213GK)
- ELECTROLUX-85551 (anciennement NE9213GK)
- EMBRACO-NE9213GK (anciennement NE9213GK)
- EUNASA-21075 (anciennement NE9213GK)
- EURFRIGOR-RB000447 (anciennement NE9213GK)
- ITV-302035 (anciennement NE9213GK)
- WHIRLP00L-485409918033 (anciennement NE9213GK)
- ZANUSSI-85551 (anciennement NE9213GK)
- ALPENINOX-91161
- ANGELO P0-3138720
- ASPERA-NEK6213GK
- ASPERA-NEK6213GK-CSIR
- ELECTROLUX-91161
- EMBRACO-NEK6213GK
- EMBRACO-NEK6213GK-CSIR
- EMMEPI-8C1300
- FAST RICAMBI-605.125

- GEV-605.125
- MIGEL-1RF173
- SAGI-3138720
- UGOLINI-22807-13010
- VND-605.125
- ZANUSSI-91161

Compressor ASPERA NEK6213GK | NEK 6213 GK

| | |
|--|---------------|
| Refrigerant | R404A/R507 |
| Working range[stC] MBP | -20 do +10 |
| Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C) | 1761 |
| Power supply | 220-240V 50Hz |
| Engine type | CSIR |
| Displacement [cm ³] | 12,11 |
| Weight [kg] | 11,6 |

Evaporating temperature +55 C

| Evaporating Temperature | Cooling Capacity +/-5% | | | Power Consumption +/-5% | Current Consumption +/-5% | Gas Flow Rate +/-5% | Efficiency +/-7% | |
|-------------------------|------------------------|-------|---------|-------------------------|---------------------------|---------------------|------------------|-------|
| | (kcal/h) | (W) | (Btu/h) | (W) | (A) | (kg/h) | (kcal/Wh) | (W/W) |
| °C | (kcal/h) | (W) | (Btu/h) | (W) | (A) | (kg/h) | (kcal/Wh) | (W/W) |
| -20 | 514 | 598 | 2.040 | 569 | 3,87 | 16,07 | 0,90 | 1,05 |
| -15 | 643 | 747 | 2.551 | 642 | 4,13 | 20,19 | 1,00 | 1,16 |
| -10 | 793 | 922 | 3.148 | 717 | 4,41 | 25,09 | 1,11 | 1,29 |
| -5 | 966 | 1.124 | 3.835 | 792 | 4,70 | 30,85 | 1,22 | 1,42 |
| 0 | 1.163 | 1.352 | 4.615 | 868 | 5,02 | 37,57 | 1,34 | 1,56 |
| 5 | 1.384 | 1.610 | 5.493 | 946 | 5,36 | 45,32 | 1,46 | 1,70 |
| 10 | 1.631 | 1.896 | 6.472 | 1.025 | 5,72 | 54,18 | 1,59 | 1,85 |

Substitutes for this compressor are: Electrolux/Cubigel MP12TB , Danfoss/Secop SC10DL , L'Unite Hermetique/Tecumseh CAE9470Z

| | |
|--------------|--------------------|
| Refrigerant: | R404A , R507 |
|--------------|--------------------|

COMPRESSEUR EMBRACO NEK6213GK

220/240V 50Hz

puissance 1/2 Hp, le déplacement 12,12 cc

gaz réfrigérant R404a/R507 MHBP

LES CODES DE FABRICANT

091161 ALPENINOX

3138720 ANGELO PO

NEK6213GK ASPERA

NEK6213GK-CSIR ASPERA

091161 ELECTROLUX PROFESSIONNEL

NEK6213GK EMBRACO

NEK6213GK-CSIR EMBRACO

8C1300 EMMEPI

1RF173 MIGEL

3138720 SAGI

22807-13010 UGOLINI

091161 ZANUSSI

| | |
|---|-----------------------|
| Alimentation | 220/240 V-50 Hz-1 Ph |
| Chevaux | 1/2 hp |
| Déplacement | 12,11 cm ³ |
| Application | MHBP |
| Capacité frigorifique en conditions ASHRAE, R404A/R507 | 1,76 kW |

| | |
|---|---------------------------------|
| Capacité frigorifique en conditions EN12900 MT, R404A/R507 | 0,97 kW |
| Réfrigérant | R404A, R452A, R507A |
| Aspiration | 3/8" |
| Refoulement | 1/4" |
| Poids | 11,60 kg |
| Hauteur maximale | 206 mm |
| LRA | 19,30 A |
| Huile de recharge | 350 cm ³ |
| Type d'huile | P0E 22 ester |
| Autres remarques | Accessoires de démarrage inclus |
| Technologie | Vitesse fixe |
| Type de refroidissement moteur | Ventilateur |
| Type moteur | CSIR |
| Type protection moteur | External |

| Specifications techniques | | | |
|---------------------------|-----------------------------------|--------------------------------|---------------------|
| Réfrigérant | R-404A - R-507A | Technologie de compresseur | Hermétique à piston |
| Application | Moyenne pression - Haute pression | Plage d'application | -20°C à +10°C |
| Type de tension | Monophasé | Tension | 240 / 1 / 50 |
| Cylindrée | 12.1cm ³ | Puissance frigorifique @ -10°C | 918W |
| Intensité maximale | 6.01A | Type moteur | CSIR |
| Détente | Capillaire / Détendeur | Diamètre aspiration ODF | 5/16" |
| Diamètre refoulement ODF | 1/4" | Entraxes de fixation | 170 x 70mm |
| Hauteur | 206mm | Charge d'huile | 0.35l |

Private Picture Copyright : WWW.MBSM.PRO





OPPO A1k

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_nek6213GK-
Catalogue_EmbracoTélécharger

Mbsm_dot_pro_private_PDF_nek6213GK-
Catalogue_Embraco-1Télécharger

| | |
|---------------------------|-----------------|
| Designation | NEK6213GK |
| Nominal Voltage/Frequency | 220-240 V 50 Hz |
| Engineering Number | 959BA51 |

A - APPLICATION / LIMIT WORKING CONDITIONS

| | | | |
|--|---|-----------------------------------|-----------|
| 1 Type | Hermetic reciprocating compressor | | |
| 2 Refrigerant | R-404A | | |
| 3 Nominal voltage and frequency | 220-240 / 50 | [V / Hz] | |
| 4 Application type | Medium Back Pressure (Commercial Compressors R404A) | | |
| 4.1 Evaporating temperature range | -20°C to 0°C | (-4°F to 32°F) | |
| 5 Motor type | CSIR | | |
| 6 Starting torque | HST - High starting torque | | |
| 7 Expansion device | Capillary tube or Expansion valve | | |
| 8 Compressor cooling | | Operating voltage range | |
| | | 50 Hz | 60 Hz |
| 8.1 LBP (32°C Ambient temperature) | - | - | - |
| 8.2 LBP (43°C Ambient temperature) | - | - | - |
| 8.3 HBP (32°C Ambient temperature) | - | - | - |
| 8.4 HBP (43°C Ambient temperature) | - | - | - |
| 9 Maximum condensing pressures/temperature | | | |
| 9.1 Operating (gauge) | 25.7 | [kgf/cm ²] (365 psig) | / °C - °F |
| 9.2 Peak (gauge) | 28.7 | [kgf/cm ²] (408 psig) | / °C - °F |
| 10 Maximum winding temperature | 130 | [°C] | |

B - MECHANICAL DATA

| | | |
|-------------------------------|---------------|--|
| 1 Commercial designation | 1/2+ | [hp] |
| 2 Displacement | 12.11 | [cm ³] (0.739 cu.in) |
| 2.1 Bore | 27.775 | |
| 2.2 Stroke | 10.000 | |
| 3 Lubricant charge | 350 | [ml] (11.84 fl.oz.) |
| 3.1 Lubricants approved | | |
| 3.2 Lubricants type/viscosity | ESTER / ISO22 | |
| 4 Weight(with oil charge) | 11.6 | [kg] (25.57 lb.) |
| 5 Nitrogen charge | 0.2 to 0.3 | [kgf/cm ²] (2.84 to 4.27 psig) |

C - ELECTRICAL DATA

| | | |
|--|------------------------------------|------------------------------------|
| 1 Nominal Voltage/Frequency/Number of Phases | 220-240 V 50 Hz 1 - (Single phase) | |
| 2 Starting device type | Current Relay | |
| 2.1 Starting device | | |
| 3 Start capacitor | 53-64(330) | [µf(VAC minimum)] |
| 4 Run capacitor | - | [µf(VAC minimum)] |
| 5 Motor protection (external) | T0743/G6 | |
| 6 Start winding resistance | 20.88 | [Ω at 25°C (77°F)] +/- 8% |
| 7 Run winding resistance | 3.93 | [Ω at 25°C (77°F)] +/- 8% |
| 8 LRA - Locked rotor amperage (50 Hz) | - | [A] - Measured according to UL 984 |
| 9 FLA - Full load amperage L/MBP (50 Hz) | - | [A] - Measured according to UL 984 |
| 10 FLA - Full Load Amperage HBP (50 Hz) | - | [A] - Measured according to UL 984 |
| 11 Approval boards certification | IMQ | |

Compresseur, réfrigération EMBRACO, FF7.5HBK1, FF7.5HBK, R12, 1/5++ HP, (1/4hp) R134a, 158f/h, Ffc60bk, Kiriazi Egypt k 330, 330l

written by Lilianne | 4 January 2021



Conçu pour faire circuler le réfrigérant R12. Ce compresseur remplace un compresseur utilisé ou cassé pour maintenir votre unité en parfait état et minimiser les temps d'arrêt. 1/5 + ch. 115V.

Ancien numéro de

pièce FF7.5BK

Tecumseh #
AEA3425AXA

Copeland #
ARE25C3-IAA

Compresseur de réfrigération Embraco Universal FF7.5HBK .
Contre-pression faible, moyenne et élevée. 1/5 + HP nominal du
moteur. À utiliser avec les réfrigérateurs, les machines à
glaçons, les armoires pour produits surgelés, les vitrines de
produits surgelés, les vitrines, etc.

Remplace Copeland ARE25C3E-IAA, Embraco EMI60HER, FF6HBK,
EME60HER, EM65HHC, EM65HNR et EGY70HLP et Tecumseh AEA1360YXA
et AEA3425YXA.

Moteur: Résistive Start Inductive Run (RSIR)

Températures d'évaporation: -10 ° F à 45 ° F

Spécifications du produit

| | |
|-------------------------------|-----------|
| Capacité BTU HBP: | 2760 |
| Capacité BTU LBP & amp; MBP: | 630 |
| Puissance (HP): | 1/5 + |
| Ampères à rotor bloqué (LRA): | 25,0 |
| Type de moteur: | RSIR |
| | |
| Niveau de compétence: | |
| Couple de démarrage: | Ordinaire |
| Volts (V): | 120 |

 **Embraco FF 7.5BK**

3065

THERMALLY PROTECTED

10 LRA

R12

1 H

220/240V~
50Hz

JOINVILLE - SC


MADE IN BRAZIL



513203969



0310

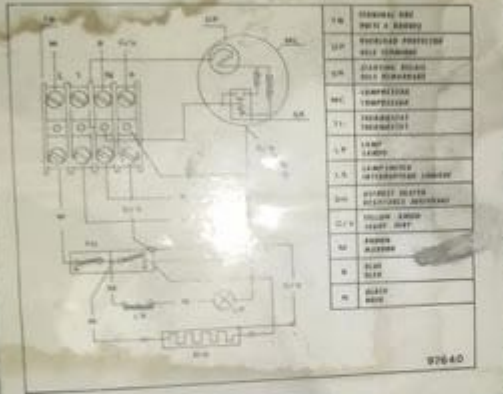

| | |
|------|----------------|
| 1M | STARTING RELAY |
| 2M | STARTING RELAY |
| 3M | STARTING RELAY |
| 4M | STARTING RELAY |
| 5M | STARTING RELAY |
| 6M | STARTING RELAY |
| 7M | STARTING RELAY |
| 8M | STARTING RELAY |
| 9M | STARTING RELAY |
| 10M | STARTING RELAY |
| 11M | STARTING RELAY |
| 12M | STARTING RELAY |
| 13M | STARTING RELAY |
| 14M | STARTING RELAY |
| 15M | STARTING RELAY |
| 16M | STARTING RELAY |
| 17M | STARTING RELAY |
| 18M | STARTING RELAY |
| 19M | STARTING RELAY |
| 20M | STARTING RELAY |
| 21M | STARTING RELAY |
| 22M | STARTING RELAY |
| 23M | STARTING RELAY |
| 24M | STARTING RELAY |
| 25M | STARTING RELAY |
| 26M | STARTING RELAY |
| 27M | STARTING RELAY |
| 28M | STARTING RELAY |
| 29M | STARTING RELAY |
| 30M | STARTING RELAY |
| 31M | STARTING RELAY |
| 32M | STARTING RELAY |
| 33M | STARTING RELAY |
| 34M | STARTING RELAY |
| 35M | STARTING RELAY |
| 36M | STARTING RELAY |
| 37M | STARTING RELAY |
| 38M | STARTING RELAY |
| 39M | STARTING RELAY |
| 40M | STARTING RELAY |
| 41M | STARTING RELAY |
| 42M | STARTING RELAY |
| 43M | STARTING RELAY |
| 44M | STARTING RELAY |
| 45M | STARTING RELAY |
| 46M | STARTING RELAY |
| 47M | STARTING RELAY |
| 48M | STARTING RELAY |
| 49M | STARTING RELAY |
| 50M | STARTING RELAY |
| 51M | STARTING RELAY |
| 52M | STARTING RELAY |
| 53M | STARTING RELAY |
| 54M | STARTING RELAY |
| 55M | STARTING RELAY |
| 56M | STARTING RELAY |
| 57M | STARTING RELAY |
| 58M | STARTING RELAY |
| 59M | STARTING RELAY |
| 60M | STARTING RELAY |
| 61M | STARTING RELAY |
| 62M | STARTING RELAY |
| 63M | STARTING RELAY |
| 64M | STARTING RELAY |
| 65M | STARTING RELAY |
| 66M | STARTING RELAY |
| 67M | STARTING RELAY |
| 68M | STARTING RELAY |
| 69M | STARTING RELAY |
| 70M | STARTING RELAY |
| 71M | STARTING RELAY |
| 72M | STARTING RELAY |
| 73M | STARTING RELAY |
| 74M | STARTING RELAY |
| 75M | STARTING RELAY |
| 76M | STARTING RELAY |
| 77M | STARTING RELAY |
| 78M | STARTING RELAY |
| 79M | STARTING RELAY |
| 80M | STARTING RELAY |
| 81M | STARTING RELAY |
| 82M | STARTING RELAY |
| 83M | STARTING RELAY |
| 84M | STARTING RELAY |
| 85M | STARTING RELAY |
| 86M | STARTING RELAY |
| 87M | STARTING RELAY |
| 88M | STARTING RELAY |
| 89M | STARTING RELAY |
| 90M | STARTING RELAY |
| 91M | STARTING RELAY |
| 92M | STARTING RELAY |
| 93M | STARTING RELAY |
| 94M | STARTING RELAY |
| 95M | STARTING RELAY |
| 96M | STARTING RELAY |
| 97M | STARTING RELAY |
| 98M | STARTING RELAY |
| 99M | STARTING RELAY |
| 100M | STARTING RELAY |

97640



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Mbsm_dot_pro_private_PDF_aftermarket-line-of-products-complete-en-jan-2020-4Télécharger
Mbsm_dot_pro_private_PDF_Ff75bkTélécharger

Compresseur, Hermétique,

**AE4456Y, Tecumseh, R-134a,
3/8HP, 230V, ae8069br,
ae4456y-fz1c**

written by Lilianne | 4 January 2021



Private Picture Copyright : WWW.MBSM.PRO

Compresseur, Hermétique, AE4456Y, Tecumseh, R-134a, 3/8HP, 230V, ae8069br, ae4456y-fz1c

**COMPRESSEUR, CAJ4517T,
AJ4TL1GF707, TECUMSEH,
Tecumseh Europe, HP: 1-1 / 2,
LRA: 45, R22**

written by Lilianne | 4 January 2021



Private Picture Copyright: WWW.MBSM.PRO

Marque: Tecumseh Europe
Réf: CAJ4517T
HP: 1-1 / 2
Température: Moyenne / Haute
Btu / Heure: 14528

Watts frigorifiques: 4258

Tension (V / Ph / Hz): 220/1/60 Ampérage
nominal: 8,5

LRA: 45

Condensateur Démarrage (μF / V): 100/260 Condensateur de
marche

(μF / V): 17,5 / 400

Système d'expansion: Capillaire /

Cylindre de vanne cm^3 : 25,95

Charge d'huile cm^3 : 782

Type d'huile: Minéral

Relais: 3ARR3 * 6 V

Thermique: CRA38015 / CST00AJSF

Ventilation forcée



Private Picture Copyright: WWW.MBSM.PRO

Compresseur, THB1350YS, R-134a, 1/5HP, 230V, Tecumseh

written by Lilianne | 4 January 2021

▪ Modèle: THB1350YS

- Gaz: **R-134a**
- Température/Pression: **Basse Pression**
- Puissance: **1/5 HP**
- Voltage: **230 V**
- Type De Courant: **Monophasé**
- Fréquence: **50 Hz**
- Type De Compresseur: **Hermétique**
- Décalage: **5.2 cm³**
- Cons.Énergie -35°C: **76 W**
- Cons.Énergie -25°C: **100 W**
- Cons.Énergie -10°C: **142 W**
- T° De Condensation: **40 °C**
- Capacité Frigorífica -35°C: **52 Kcal/h**
- Capacité Frigorífica -30°C: **74 Kcal/h**
- Capacité Frigorífica -25°C: **102 Kcal/h**
- Capacité Frigorífica -20°C: **137 Kcal/h**
- Capacité Frigorífica -15°C: **176 Kcal/h**
- Capacité Frigorífica -10°C: **223 Kcal/h**
- Tipo Test: **EN.12900**

Mbsm_dot_pro_private_PDF_TecumsehTélécharger



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_Tecumseh1Télécharger

R134a, High Temperature, Hermetic, Compressor, TECUMSEH, AE1144E, HP 1/3 (lbp), AE3440Y, HP 1/3(Big+), HBP/CBP – High/Commercial Back Pressure, 1 Phase

written by Lilianne | 4 January 2021

R134a, High Temperature, Hermetic, Compressor, TECUMSEH,
AE1144E, HP 1/3 (lbp), AE3440Y, HP 1/3(Big+), HBP/CBP –
High/Commercial Back Pressure, 1/3 HP/Ton , 1 Phase

Tecumseh ,Compressor Az1355D, 1/6Hp , R12 ,réfrigérateur

written by Lilianne | 4 January 2021

Tecumseh ,Compressor Az1355D, 1/6Hp , R12 ,réfrigérateur

Tecumseh , CAJ4511A , Compressor , 1 HP, 208-230V, 1 PHASE, R12, Hermetic , Reciprocating Compressor Replacement

written by Lilianne | 4 January 2021

Tecumseh , CAJ4511A , Compressor , 1 HP, 208-230V, 1 PHASE,
R12, Hermetic , Reciprocating Compressor Replacement

COMPRESSOR , EMBRACO , FF6BK , 1/5 HP, 115V , R12 , LBP , 635 BTU , Manufactured by , Tecumseh

written by Lilianne | 4 January 2021

COMPRESSOR , EMBRACO , FF6BK , 1/5 HP, 115V , R12 , LBP , 650
BTU , Manufactured by , Tecumseh

Compressor ,TECUMSEH 1/4HP ,THG1374YS, R134A ,tm271- ms-393

written by Lilianne | 4 January 2021

Compressor ,TECUMSEH 1/4HP ,THG1374YS, R134A ,tm271-ms-393