

# **Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V**

written by Lilianne | 12 October 2018

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power  
3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

## **EMBRACO Asprea Compressor NT6220Z**

### **Technical Details**

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP

- ASPERA

SKU: 3070180

**Suitable For/Compatible With**

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO



embraco NT




R134a

HBP

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

## EM/NE/NT/NJ

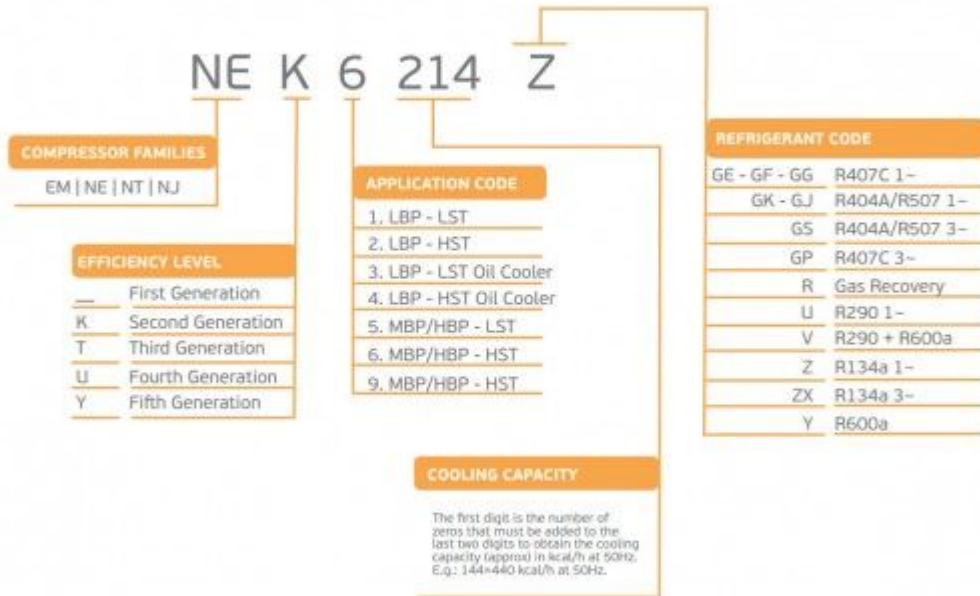

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



**Mbsm.Pro , Tecumseh  
Refrigeration Compressor,  
CAE9460Z , R404A refrigerant  
, 3/8 hp, mhbp, 1/2HP**

# **, 1PH(phase) , 220V to 240V**

written by Jamila | 12 October 2018

Mbsm.Pro , Tecumseh Refrigeration Compressor ,R404A  
refrigerant ,1/2HP ,1PH(phase) , 220V to 240V

- Brand Name:Tecumseh
- Certification:RoHS
- Application:Refrigeration Parts
- Type:Refrigeration Compressor

411445

   
6B88330200  
CAE9460Z

R404A LRA 17  
220-240V ~ 50Hz PLA 3.40

  
53 D1510 10 195819 A  
COUNTRY OF ORIGIN: FRANCE THERMALLY PROTECTED



**LOW BACK PRESSURE COMPRESSORS**

Type	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)									VOLTAGE
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature								
					Oil charge (cm <sup>3</sup> )	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C	-10°C	
						t	t	t	t	t	t	t	
PISTON	AEZ2415Z	7/16	R404A	8.1	350			160	231	355	429	703	220-240V/1/50Hz
	CAE2417Z	7/16	R404A	11.3	350	37.8	62	161	280	460	557	891	220-240V/1/50Hz
	CAE2420Z	1/2	R404A	12.6	350	194	179	232	357	547	654	1047	220-240V/1/50Hz
	CAE2424Z	5/8	R404A	15.1	350	228	180	291	442	664	783	1199	220-240V/1/50Hz
	CAJ2428 TAJ2428Z	3/4	R404A	15.2	887			306	434	628	773	1246	220-240V/1/50Hz 400V/3/50Hz
	CAJ2432Z TAJ2432Z	3/4	R404A	18.3	887	331	265	318	510	792	950	1560	220-240V/1/50Hz 400V/3/50Hz
	CAJ2440Z	1	R404A	21	887	532	394	452	647	975	1166	1876	220-240V/1/50Hz
	CAJ2446Z TAJ2446Z	1	R404A	26.15	887	702	575	549	797	1194	1423	2290	220-240V/1/50Hz 400V/3/50Hz
	CAJ2464Z TAJ2464Z	1-1/2	R404A	34.45	887	805	626	723	1076	1605	1902	3012	220-240V/1/50Hz 400V/1/3/50Hz
	FH2480Z TFH2480Z	2	R404A	53.2	1625	292	420	738	1319	2183	2662	4419	220-240V/1/50Hz 400V/3/50Hz
	FH2511Z TFH2511Z	3	R404A	74.25	1625	1561	1203	1380	2016	3135	3796	6222	220-240V/1/50Hz 400V/3/50Hz
	TAG2516Z TAGP2516Z	4	R404A	112.5	1960	1696	1407	1743	2704	4356	5335	9038	400V/3/50Hz
	TAG2522Z TAGP2522Z	6	R404A	134.8	1960	2541	2012	2378	3542	5522	6688	11062	400V/3/50Hz
	TAG2527Z TAGP2527Z	8	R404A	225	3000	3300	2814	3498	5400	8710	10671	18078	400V/3/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

**THE NEW TWO GENERATION BRAZIL COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed 54.5°C Cond Temp (Watts)									VOLTAGE	
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Evaporating Temperature									
					Oil charge (cm <sup>3</sup> )	-20°C	-15°C	-10°C	-5°C	0°C	+5°C	+10°C		+15°C
						t	t	t	t	t	t	t		t
PISTON	AE4425Z-FZ1A	1/5	R404A	4.24	222	228	290	362	446	545	659	792	220-240V/1/50Hz	
	AE4430Z-FZ1A	1/4	R404A	5.16	216	293	375	466	568	685	821	977	220-240V/1/50Hz	
	AE4440Z-FZ1A	1/3	R404A	6.69	278	377	482	599	730	881	1055	1257	220-240V/1/50Hz	
	AE4450Z-FZ1A	7/16	R404A	8.85	369	500	640	795	970	1170	1401	1668	220-240V/1/50Hz	
	AE4460Z-FZ1C	1/2	R404A	10.33		636	784	959	1160	1380	1630	1920	220-240V/1/50Hz	

**Tecumseh Compressor**

**LOW BACK PRESSURE COMPRESSORS**

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)		REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)							VOLTAGE	
		t	Refrigerant	Displacement (cm <sup>3</sup> )	Oil charge (cm <sup>3</sup> )	Evaporating Temperature						
						t	t	t	t	t		
												-35°C
ROTARY	RGA/HGA2426Z	2/3	R404A	9.50	290	375	474	590	726	888	1080	220-240V/1/50Hz
	RGA/HGA2432Z	4/5	R404A	11.50	290	451	567	707	872	1065	1290	220-240V/1/50Hz
	RGA/HGA2436Z	1	R404A	12.70	290	508	643	804	994	1219	1483	220-240V/1/50Hz

Picture5 Mbsm Dot Pro : www.mbsm.pro

## Tecumseh Compressor

### MEDIUM/HIGH BACK PRESSURE COMPRESSORS

TYPE	COMPRESSOR MODELS	Nominal Power (H.P.)				REFRIGERATION CAPACITY AT 50HZ Rafed @54.5°C Cond Temp (Watts)							VOLTAGE
			Refrigerant	Displacement (cm <sup>3</sup> )	Oil charge (cm <sup>3</sup> )	Evaporating Temperature							
						-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C	
ROTARY	RGA/HGA4467Z	1/2	R404A	9.50	290	679	847	1047	1283	1557	1872	2231	220-240V/1/50Hz
	BGA/HGA4480Z	2/3	R404A	11.50	290	825	1017	1252	1530	1851	2212	2613	220-240V/1/50Hz
	RGA/HGA4492Z	3/4	R404A	12.50	290	905	1133	1398	1706	2060	2468	2932	220-240V/1/50Hz
	RGA/HGA4512Z	1	R404A	16.10	290	1163	1438	1770	2160	2609	3118	3689	220-240V/1/50Hz
	RGA/HGA4445Y	1/3	R134a	9.50	290	392	493	618	770	954	1173	1430	220-240V/1/50Hz
	RGA/HGA4450Y	2/5	R134a	11.50	290	501	625	778	963	1184	1445	1749	220-240V/1/50Hz
	RGA/HGA4460Y	1/2	R134a	12.70	290	537	677	844	1045	1287	1576	1920	220-240V/1/50Hz

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



**Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp , 220V, Lbp, Rsir , cooling capacity 165W**

written by Jamila | 12 October 2018



Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator, Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp ,



220V, Lbp, Rsir , cooling capacity 165W

---

**MBSM.PRO , Copeland , KCE432HAG  
 , Compresseur Hermétique,  
 1/4HP, R134, 1ph , Afcon  
 Industrial Equipment, High /  
 Medium temperature (HBP /  
 CBP )**

written by Jamila | 12 October 2018



MBSM.PRO , Copeland , KCE432HAG , Compresseur Hermétique, 1/4HP,  
 R134, 1ph , Afcon Industrial Equipment, High / Medium  
 temperature (HBP / CBP)

---

**MBSM.PRO , Zel Compressors  
 , Low back pressure, gmL200a  
 152W , gmL200a 152W, GML180A  
 144W, gmL160g 129W, gmL140a**

# **108W, GML110A 90W, R134a , 220-240V 50HZ**

written by Jamila | 12 October 2018

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W ,  
gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W,  
GML110A 90W, R134a , 220-240V 50HZ

## **Zel gml200a gml180a gml160g gml140a gml110a r134a Compressors**

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:  
Mainland China

Brand:  
West of Monza

Color classification:  
gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:  
R134a

Voltage:

220-240V 50HZ

Working conditions:

Low back pressure



---

# **Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 – 240 V**

written by Lilianne | 12 October 2018

Mbsm.pro , Compressors ZMC, EGL90AA, R-134a ,1/4 HP LBP, 220 –  
240 V

## **BRAND**

• – ZMC

## **TECHNICAL SPECIFICATIONS :**

- MODEL: **EGL 90 AA**
- POWER: **1/4 Hp**
- VOLTAGE: **220 – 240 V**
- WATT: **227.00 W**
- REFRIGERANT GAS: **R 134**
- K.CAL: **195.00 Cal.**

**Features** : The compressors form the basis of the refrigerant system and function to compress the gas from the evaporation to the condensation pressure.



## USAGE PLACES :

It is used in Refrigerator devices belonging to all brands and models.

## INSTRUCTIONS FOR USE:

Zmc EGL90AA;It is recommended to be used by a specialist authorized or authorized service.



Mbsm\_dot\_pro\_private\_PDF\_catalogo\_cubigel\_R134aTélécharger  
Mbsm\_dot\_pro\_private\_PDF\_cubigel-katalogTélécharger

---

**Mbsm.pro, DAEW00 Compressor ,  
HSL27YE-5, 1/4HP , 1PH, R134a  
,220-240V 50Hz,Puissance  
frigorifique 244 W, 833 Btu /  
h**

written by Jamila | 12 October 2018



Mbsm.pro, DAEW00 Compressor , HSL27YE-5, 1/4HP , 1PH, R134a  
,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h

---

**Mbsm.pro, QA57C12GAX5 , 1PH ,  
1/6 HP ,Panasonic ,Matsushita  
Electric, Company, Malaysia ,  
R134a , 220/240V 50Hz**

written by Jamila | 12 October 2018

Mbsm.pro, QA57C12GAX5 , 1PH , 1/6 HP ,Panasonic ,Matsushita  
Electric, Company, Malaysia , R134a , 220/240V 50Hz



---

**Mbsm.pro , L76AV  
,Compresseur, 1/5 HP ,149W,  
R12 ,E80101 ,Zem ,HMBP  
,Hermetic piston compressors  
, 220V/50 , 1PH(phase)**

written by Jamila | 12 October 2018



Mbsm.pro , L76AV ,Compresseur, 1/5 HP ,149W, R12 ,E80101 ,Zem  
,HMBP ,Hermetic piston compressors , 220V/50 , 1PH(phase)

---

# MBSM.PRO , HYE69YL , Compressor (LBP) , China R134a ,Huayi Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

written by Jamila | 12 October 2018

MBSM.PRO , HYE69YL ,Compressor (LBP) , China R134a ,Huayi  
Compressor Co., Ltd, 69 YL ,1/4 Hp ,168Kcal , 220V

Test conditions	According to ASHRAE
Evaporating temperature	-23.3[°C]
Condensing temperature	54.4[°C]
Subcooling temperature	32.2[°C]
Suction temperature	32.2[°C]
Ambient temperature	32.2[°C]
Working condition limit:R134a	
Max ambient temperature	43[°C]
Evaporation temperature range	-35~-15[°C]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0[Mpa](gauge pressure)
Max allowable housing temperature	95[°C]
Max discharge temperature	125[°C]

Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4/0.4Mpa(gauge pressure)187V/98V

Product model:HYE69YL

Cooling capacity:195W

COP $\square$ W/W $\square$ :1.15

Voltage $\square$ V $\square$ :220-240~

Frequency(Hz):50



Products

R134a Compressor (LBP)

- HYE Serie
- HY Serie
- HYB Serie
- HYS Serie


R600a Compressor (LBP)

- HYE Serie
- HY Serie
- HYB Serie
- HYS Serie

R134a Compressor (MBP,HBP)

- HY Serie
- HYE Serie

Newest Catalog Download



Product model:HYE69YL  
Cooling capacity:195W  
COP (W/W) :1.15  
Voltage (V) :220-240~  
Frequency(Hz):50

Test conditions	According to ASHRAE
Evaporating temperature	-23.3°C
Condensing temperature	54.4°C
Subcooling temperature	32.2°C
Suction temperature	32.2°C
Ambient temperature	32.2°C
<b>Working condition limit:R134a</b>	
Max ambient temperature	43[°C]
Evaporation temperature range	-35~-15[°C]
Working voltage range.	187~254/98~127[V]
Max discharge pressure	2.0 [Mpa](gauge pressure)
Max allowable housing temperature	95[°C]
Max discharge temperature	125[°C]
Max pressure housing endured	2.7[Mpa](gauge pressure)
Low voltage start	0.4/0.4Mpa(gauge pressure)187V/98V

