

# LG Refrigeration Compressor , LX86HAEP , 385 w , 220 v 50Hz , R134A , 1/2 Hp


R134A R600A Refrigeration Refrigerator Freezer Fridge Parts Compressor

Suitable for Commercial refrigerators, freezers, wine cabinets, dispenser and other refrigeration appliance.

LX/LA/LC/LD Series : R134a													
Power Source	Series	Model	Cooling Capacity (Kcal/Hr)	Motor Input (Watts)	EER (Btu/W.Hr)	Starting Voltage	Noise (dBA)	Oil					
50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	Cold	Warm	Break Down	50Hz	60Hz	viscosity		
110-115V, 60Hz	LA	LA80LAQH		245		203		4.80	82	77	82	42	15
	LA	LA80LBQH	252		184		5.45	97	88	93		42	10
	LA	LA86LAQH	275		214		5.10	88	82	88		42	10
	LA	LA95LAQH	312		243		5.10	93	88	93	42		10
	LC	LC62LBQH	190		136		5.55	98	88	93		41	10
	LX	LX67LAQG	187		177		4.19	88	83	88		41	15
	LX	LX67LAQM	195		166		4.65	93	88	93		41	15
	LX	LX72LAQG	213		185		4.57	94	88	94		41	15
	LX	LX72LBQG	213		198		4.27	88	83	94		41	15
	LX	LX72LBQM	213		181		4.67	93	82	93		41	15
	LX	LX86HAQG	850		450		7.50	94	88	94		53	22
	LX	LX86HPQF	850		450		7.50	82	88	93		53	22
	LX	LX86LAQM	245		198		4.91	98	92	98		42	15
	LX	LX95HPQF	950		523		7.20	176	187	187		50	22
	LX	LX95LAQH	285		230		4.92	98	88	94		42	15
	LX	LX95LBQH	280		240		4.63	88	82	94		41	15
110V, 50-60Hz	LC	LC86LAAH	208	276	164	197	5.05	5.55	88	80	85	42	42 10
	LX	LX110LAAH	270	300	255	255	4.20	4.67	80	75	85	41	41 15
	LX	LX72LAAM	170	213	157	180	4.30	4.70	80	75	80	41	41 15
	LX	LX95LAAH	230	280	203	227	4.50	4.90	85	80	85	41	41 15
110V, 50Hz	LX	LX72LAPG	170		169		3.99		88	83	94	41	15
115-127V, 60Hz	LC	LC80LAUH		249		177		5.60	95	92	98	42	10
	LC	LC86LAUH	276		196		5.60	97	92	98		42	10
115V, 60Hz	LA	LA62LACM		188		138		5.40	98	86	98	42	10
	LA	LA62LBCM	188		142		5.25	92	86	98		40	15
	LA	LA67LACM	209		154		5.40	97	92	97		41	10
	LA	LA67LBCM	210		152		5.50	97	92	97		42	10
	LA	LA80LACH	249		183		5.40	98	92	98		42	15
	LA	LA80LACM	268		165		6.45	98	92	98		42	10
	LA	LA86LACH	270		202		5.30	98	93	98	43		15
	LC	LC62LBCM	190		136		5.55	92	86	98		41	10
	LC	LC86LACH	277		196		5.60	98	92	98		42	10

LD	LD72LACH		241		162		5.90	97	86	98		40	7	
LX	LX110HACF		1040		618		6.68	86	98	98		54	22	
LX	LX72HACG		720		370		7.73	92	98	98		53	22	
LX	LX86HACF		860		448		7.62	92	86	98		51	22	
LX	LX86HACG		860		448		7.62	98	92	98		51	22	
LX	LX86LACM		245		198		4.91	98	92	98		42	15	
LX	LX95HACF		950		524		7.20	92	98	98		54	22	
127V, 60Hz	LA	LA86LAFH		272		212		5.10	108	102	108	42	15	
LC	LC62LAFM		195		140		5.55	92	86	92		41	10	
LX	LX67LAFM		195		153		5.06	102	95	108		41	15	
LX	LX86LAFH		250		208		4.77	108	102	108		42	15	
LX	LX95LAFH		280		232		4.79	102	95	108		41	15	
200 - 220V, 50Hz 220V, 60Hz	LX	LX72LASG	170	213	157	181	4.30	4.67	176	165	176	40	41	15
220 - 240V, 50Hz	LA	LA62LAEM	145		113		5.16		176	165	187	40	15	
LA	LA72LAEM	177		135		5.20		165	165	176	42	15		
LA	LA95LAEM	240		181		5.25		176	165	187	42	15		
LC	LC80LAEM	200		148		5.36		176	165	176	40	10		
LC	LC86LAEM	220		162		5.40		176	165	187	41	10		
LC	LC95LAEH	245		178		5.45		187	165	187	42	10		
LC	LC95LAEM	245		178		5.45		176	165	187	42	10		
LD	LD95LAEH	244			171	5.65		187	176	187		41	7	
LX	LX110HAEM	950		503		7.50		187	176	187	52	22		
LX	LX110HAEP	910		503		7.18		165	176	187	52	22		
LX	LX110LAEH	270		215		4.99		187	176	187	41	15		
LX	LX110LAEM	270		215		4.99		176	165	187	42	15		
LX	LX67LBEG	155		151		4.08		165	165	165	40	15		
LX	LX72HAEG	630		325		7.70		176	187	187	50	22		
LX	LX72HAEP	600		315		7.56		165	176	176	50	22		
LX	LX72LAEG	170		154		4.38		176	165	187	41	15		
LX	LX72LAEM	170		146		4.62		176	165	187	40	15		
LX	LX72LBEG	170		154		4.38		176	165	187	41	15		
LX	LX86HAEG	745		385		7.68		176	165	187	50	22		
LX	LX86HAEP	710		385		7.32		165	176	176	50	22		
LX	LX86LAEG	205		177		4.60		187	176	187	41	15		
LX	LX86LAEM	194		159		4.84		187	176	187	41	15		
LX	LX86LBEG	194		179		4.30		176	165	187	41	15		
LX	LX86LCEG	194		182		4.23		176	165	176	41	15		
LX	LX95HAEG	830		440		7.49		176	187	187	50	22		
220 - 240V, 50Hz 220V, 60Hz	LX	LX72LATF	170	213	159	181	4.24	4.67	176	165	176	40	41	15
LX	LX72LATG	170	213	159	181	4.24	4.67	176	165	176	40	41	15	
LX	LX72LATH	170	213	157	175	4.30	4.83	176	165	176	40	41	15	
220V, 50 - 60Hz	LX	LX67LABG	155	195	145	167	4.24	4.64	176	165	187	41	41	15
LX	LX67LABH	160	196	142	158	4.47	4.93	176	165	187	40	41	15	
LX	LX67LABM	155	195	128	152	4.81	5.09	176	165	187	41	41	15	
LX	LX72LPBP	166	206	153	180	4.30	4.54	187	176	187	42	42	15	
LX	LX86LABM	194	250	159	193	4.84	5.14	187	176	187	41	41	15	
LX	LX86LPBP	196	247	190	218	4.10	4.50	187	176	187	44	44	15	
LX	LX95LABH	230	280	210	224	4.35	4.96	176	165	165	41	41	15	
220V, 50Hz	LA	LA95LAJH		240		198		4.81	165	154	165	41	10	
LX	LX110LAJH	270		236		4.54		176	165	187	41	15		
LX	LX110LAJM	270		236		4.54		176	165	187	42	15		
LX	LX125LAJM	315		278		4.50		176	165	176	42	15		
LX	LX86LAJG	194		182		4.23		176	165	176	41	15		
	LA	LA62LADM		188		141		5.30	176	165	187	40	15	
LA	LA72LADM		229		165		5.50	187	165	187	41	15		
LA	LA80LADM		246		181		5.40	176	165	187	42	15		

LA	LA86LADH		268		197		5.40	176	165	187		42	15
LC	LC62LADM		193		138		5.55	187	176	187		41	10
LC	LC62LBDM		193		139		5.50	176	165	176		41	10
LC	LC72LADM		229		159		5.70	187	176	187		40	10
LC	LC86LADH		277		193		5.70	187	176	187		42	10
LD	LD62LADM		195		136		5.70	182	165	187		41	7
LD	LD72LADM		241		164		5.85	187	176	187		40	7
LD	LD72LADM		241		161		5.95	187	176	187		40	7
LT	LTA62LADH		190		142		5.30	176	165	187		42	10
LX	LX110HPDP		1000		630		6.30	176	187	187		54	22
LX	LX110LPDP		300		290		4.11	187	176	187		44	15
LX	LX125HPDP		1200		760		6.27	176	187	176		53	22
LX	LX67LADG		195		168		4.61	176	165	176		41	15
LX	LX72HPDG		695		397		7.00	165	176	187		51	22
LX	LX72HPDP		700		385		7.20	176	187	187		51	22
LX	LX72LADM		213		169		5.00	176	165	187		41	15
LX	LX86HPDP		840		460		7.25	176	187	187		52	22
LX	LX86LADM		250		193		5.14	187	176	187		41	15
LX	LX95LADH		280		224		4.96	176	165	165		41	15
L Series : R600a													
Power Source	Series	Model	Cooling Capacity (Kcal/Hr)	Motor Input (Watts)	COP (W/W)	Starting Voltage	Noise (dBA)	Oil					
50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	Cold	Warm	Break Down	50Hz	60Hz	viscosity		
220-240V, 50Hz	LX	LX95NAEM	115		102		1.13		176	165	187	39	
LX	LX110NAEM	134		117		1.15		176	165	187	39		

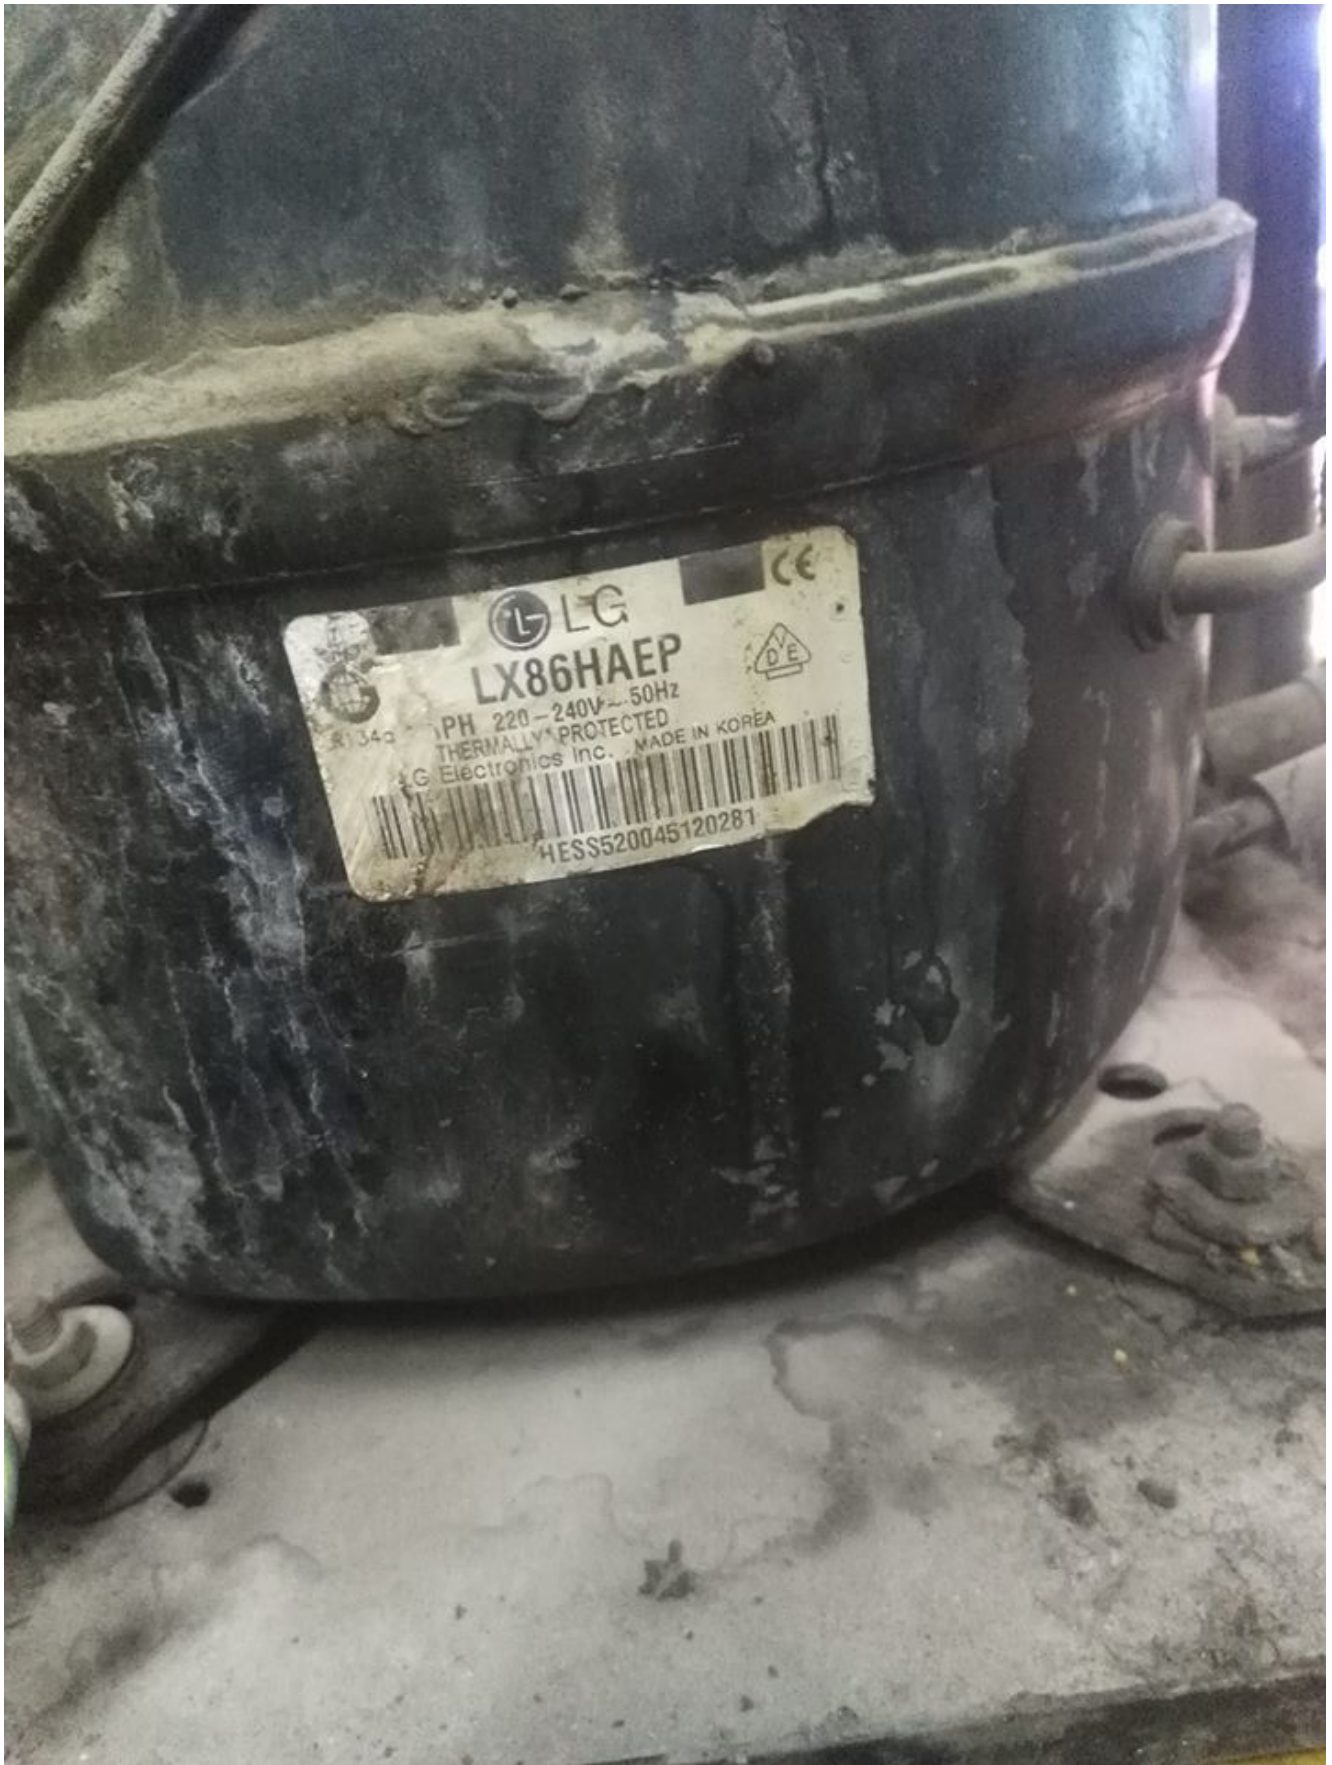

LX	LX110HAEP	910		503		7.18		165	176	187	52		22	
LX	LX110LAEH	270		215		4.99		187	176	187	41		15	
LX	LX110LAEM	270		215		4.99		176	165	187	42		15	
LX	LX67LBEG	155		151		4.08		165	165	165	40		15	
LX	LX72HAEG	630		325		7.70		176	187	187	50		22	
LX	LX72HAEP	600		315		7.56		165	176	176	50		22	
LX	LX72LAEG	170		154		4.38		176	165	187	41		15	
LX	LX72LAEM	170		146		4.62		176	165	187	40		15	
LX	LX72LBEG	170		154		4.38		176	165	187	41		15	
LX	LX86HAEG	745		385		7.68		176	165	187	50		22	
LX	LX86HAEP	710		385		7.32		165	176	176	50		22	
LX	LX86LAEG	205		177		4.60		187	176	187	41		15	
LX	LX86LAEM	194		159		4.84		187	176	187	41		15	
LX	LX86LBEG	194		179		4.30		176	165	187	41		15	
LX	LX86LCEG	194		182		4.23		176	165	176	41		15	
LX	LX95HAEG	830		440		7.49		176	187	187	50		22	
220-240V,50Hz 220V,60Hz	LX	LX72LATF	170	213	159	181	4.24	4.67	176	165	176	40	41	15
LX	LX72LATG	170	213	159	181	4.24	4.67	176	165	176	40	41	15	
LX	LX72LATH	170	213	159	181	4.24	4.67	176	165	176	40	41	15	

Private Picture Copyright: WWW.MBSM.PRO

BMA053LAMV , BMA069LAMV , BMA082LAMV , BMA098NAMV , BMA098NHMV ,  
BMA108NAMV , LA62LACM , LA62LADM , LA62LAEM , LA62LBCM , LA67LACM , LA67LBCM , LA72LADM , LA72LAEM , LA80LACH , LA80LACM , LA80LADM ,  
LA80LAQH , LA80LBQH , LA86LACH , LA86LADH , LA86LAFH , LA95LAEM ,  
LA95LAJH , LA95LAQH , LQ100LAJH , LQ119NAEM , LQ119NAEMe , LQ125NAEM , LQ140NAEM , LQ140NAEMe , LQ62LAEM , LQ86LAEM , LQ86LDEM ,  
LX110HAEM , LX110HAEP , LX110HHDH , LX110HPDP , LX110LAAH ,  
LX110LAEH , LX110LAEM , LX110LAJH , LX110LAJM , LX110LHJF , LX110LHJH , LX110LPDP , LX125HPDP , LX125LAJM , LX67LABH , LX67LABM ,  
LX67LADG , LX67LAFM , LX67LAQG , LX67LAQM , LX67LBEG , LX67LHBM ,  
LX72LHJH , LX72HAEG , LX72HAEP , LX72HPDG , LX72HPDP , LX72LAAM , LX72LADM , LX72LAEG , LX72LAEM , LX72LATF , LX72LATG , LX72LATH ,  
LX72LBEG , LX72LBQG , LX72LBQM , LX72LHJF , LX72LHJM , LX72LHQF ,  
LX72LPBP , LX86LAJG , LX86HAEG , LX86HAEP , LX86HAQG ,  
LX86HPDP , LX86HPQF , LX86LABM , LX86LACM , LX86LADM , LX86LAEG , LX86LAEM , LX86LAFH , LX86LAQM , LX86LBEG ,

LX86LCEG , LX86LHEM , LX86LHJF , LX86LPBP , LX95HAEG , LX95LAAH , LX95LABH  
 , LX95LADH , LX95LAFH , LX95LAQH , LX95LBQH ,

MA53HHBG , MA53LABG , MA53LABM , MA53LACM , MA53LADG , MA53LADM , MA53LBDM  
 , MA53LCCM , MA53LGUG , MA57LAAM ,

MA57LABM , MA57LACM , MA57LADG , MA57LADM , MA57LAEG , MA57LAEM , MA57LHEM  
 , MA62LACM , MA62LADM , MA62LCAH ,

MA62LCEG , MA69LAEG , MA72LADP , MA72LHDM , MB53LACH , MB53LADM , MB53LBCH  
 , MB57LADM , MB62NAEG , MB62NAEM ,

MB82NAEG , MB82NAEM , MB98NAEM , MC57LAEM , MC62LAEH , MC62LAEM , MC62NAEM  
 , MC98NAEM , MF108NAEM , MF108NHEM ,

MF57NAEM , MF57NHEM , MF62NAEM , MF62NHEM , MF69NAEM , MF69NHEM , MF82NAEM  
 , MF82NHEM , MF88NAEM , MF88NHEM ,

MF98NAEM , MF98NHEM , NS24HAAG , NS24HADG ,

NS24HAEG , NS24LABG , NS24LACG , NS24LADG , NS24LADM , NS24LAEG , NS24LAFG  
 , NS24LAFM