

Mbsm.pro, TECUMSEH, Compressor, Condensing, Units, AHC4540EFZ, FH4540F, FH4524F, FH4528F, FH4531F, FH4540F, R22, 3-1/2 HP, hbp, CSR, 220V ~ 50HZ

Category: compressor

written by Lilianne | 15 January 2022



Private Picture Copyright: WWW.MBSM.PRO

Performance

Condition	Test Voltage	(R) Btu/h	(R) kcal/h	(R) W	(I) W	(E) Btu/Wh	(E) kcal/Wh	W/W	EVAP TEMP	COND TEMP	AMBIENT TEMP	RETURN GAS	LIQUID TEMP
EN12900	220V ~ 50HZ	31460	7927	9217	3580	8.78	2.21	2.57	5°C (41°F)	50°C (122°F)	32°C (90°F)	20°C (68°F)	50°C (122°F)

General

Evaporating Temp. Range: -6.7°C to 12.8°C (20°F to 55°F)

Motor Torque: High Start Torque (HST)

Compressor Cooling: Fan

Mechanical

Weight: 37

Weight Unit of Measure: KG

Displacement (cc): 74.25

Oil Type: Polyolester
 Viscosity (cSt): 32
 Oil Charge (cc): 1480

Electrical

Voltage Range (50 Hz): 198-253
 Voltage Range (60 Hz): N/A
 Locked Rotor Amps (LRA): 94
 Rated Load Amps (RLA 50 Hz): 18.6
 Rated Load Amps (RLA 60 Hz): 0
 Max. Continuous Current (MCC in Amps): 30.5
 Motor Resistance (Ohm) – Main: .6
 Motor Resistance (Ohm) – Start: 3
 MotorType: CSR
 Overload Type: N/A
 Relay Type: N/A

Agency Approval

R134a, Room Temperature -25°~10°

Unit Model	Compressor	Condenser					
Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-THB4410Y	THB4410Y	1/8	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4413Y	THB4413Y	1/4	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4415Y	THB4415Y	1/6	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4419Y	THB4419Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-THB4422Y	THB4422Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4425Y	AE4425Y	1/5	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4430Y	AE4430Y	1/4	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4440Y	AE4440Y	1/3	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4450Y	AE4450Y	3/8	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4456Y	AE4456Y	7/16	220-240V/1/50HZ	1*φ200	560	38	220V
CE-AE4460Y	AE4460Y	1/2	220-240V/1/50HZ	1*φ200	560	38	220V
CE-CAJ4452Y	CAJ4452Y	3/7	220-240V/1/50HZ	1*φ200	560	38	220V
CE-CAJ4461Y	CAJ4461Y	1/2	220-240V/1/50HZ	1*φ250	1150	65	220V
CE-TAJ4461Y	CTAJ4461Y	1/2	400V/3/50HZ	1*φ250	1150	70	380V
CE-CAJ4476Y	CAJ4476Y	5/8	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-CAJ4492Y	CAJ4492Y	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ4492Y	TAJ4492Y	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ4511Y	CAJ4511Y	1	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4511Y	TAJ4511Y	1	400V/3/50HZ	1*φ350	2980	138	380V
CE-CAJ4513Y	CAJ4513Y	1-1/8	220-240V/1/50HZ	1*φ350	2980	138	220V

CE-FH4518Y	FH4518Y	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4518Y	TFH4518	1-1/2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH4525Y	FH4525Y	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4525Y	TFH4525Y	2	400V/3/50HZ	1*φ350	3110	145	380V
CE-TAG4528Y	TAG4528Y	2-1/2	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAG4534Y	TAG4534Y	2-1/2	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAG4537Y	TAG4537Y	3-1/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-TAH4543Y	TAG4543Y	3-1/2	400V/3/50HZ	2*φ350	6220	290	380V

R404A, Room Temperature -25℃~10℃

Unit Model Compressor Condenser

Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-FH4522Z	FH4522Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4522Z	TFH4522Z	2	400V/3/50HZ	1*φ350	2980	138	380V
CE-FH4524Z	FH4524Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH4524Z	TFH4524Z	2	400V/3/50HZ	1*φ350	2980	138	380V
CE-FH4531Z	FH4531Z	2-3/4	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4531Z	TFH4531Z	2-3/4	400V/3/50HZ	2*φ350	5960	276	380V
CE-FH4540Z	FH4540Z	3-1/2	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4540Z	TFH4540Z	3-1/2	400V/3/50HZ	2*φ350	5960	276	380V
CE-TAG4546Z	TAG4546Z	4	400V/3/50HZ	2*φ350	5960	276	380V
CE-TAG4553Z	TAG4553Z	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4561Z	TAG4561Z	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4568Z	TAG4568Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4573Z	TAG4573Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4581Z	TAG4581Z	6-3/4	400V/3/50HZ	2*φ400	7800	380	380V

R404A, Room Temperature -30℃~ -10℃

Unit Model Compressor Condenser

Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-THB2360Z	THB2360Z	1/5	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-THB2378Z	THB2378Z	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-THB2396Z	THB2396Z	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2410Z	AE2410Z	1/4	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2415Z	AE2415Z	3/8	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE2420Z	AE2420Z	1/2	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-AE2425Z	AE2425Z	5/8	220-240V/1/50HZ	1*φ300	1664	85	220V
CE-TYA2431ZKS	TYA2431ZKS	1	220-240V/1/50HZ	1*φ300	1664	85	220V
CE-TYA2438ZKS	TYA2438ZKS	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TYA2431ZKS	TYA2431ZKS	1-1/3	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-CAJ2428Z	CAJ2428Z	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ2428Z	TAJ2428Z	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ2432Z	CAJ2432Z	3/4	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ2432Z	TAJ2432Z	3/4	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ2440Z	CAJ2440Z	1	220-240V/1/50HZ	1*φ300	2100	115	220V


CE-CAJ2446Z	CAJ2446Z	1	220-240V/1/50HZ	1*φ300	2100	115	380V
CE-TAJ2446Z	TAJ2446Z	1	400V/3/50HZ	1*φ300	2150	120	220V
CE-CAJ2464Z	CAJ2464Z	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	380V
CE-TAJ2464Z	TAJ2464Z	1-1/2	400V/3/50HZ	1*φ350	3110	145	220V
CE-FH2480Z	FH2480Z	2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TFH2480Z	TFH2480Z	2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH2511Z	FH2511Z	3	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH2511Z	TFH2511Z	3	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2513Z	TAG2513Z	3-1/4	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2516Z	TAG2516Z	4	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG2522Z	TAG2522Z	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG2525Z	TAG2525Z	6-1/4	400V/3/50HZ	2*φ400	7800	380	380V

R22, Room Temperature -25℃~10℃

Unit Model	Compressor	Condenser					
Model	Capacity (HP)	Power	Qty*Dia	Air Flow (m ³ /h)	Fan Power (W)	Fan Voltage	
CE-AE4425E	AE4425E	1/5	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AE4430E	AE4430E	1/4	220-240V/1/50HZ	1*φ200	455	29	220V
CE-AEZ4440E	AEZ4440E	1/3	220-240V/1/50HZ	1*φ200	455	29	220V
CE-CAE4450E	CAE4450E	7/16	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-CAE4460E	CAE4460E	1/2	220-240V/1/50HZ	1*φ250	1000	70	220V
CE-CAJ9480T	CAJ9480T	5/8	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ9480T	TAJ9480T	5/8	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ9510T	CAJ9510T	1	220-240V/1/50HZ	1*φ300	2100	115	220V
CE-TAJ9510T	TAJ9510T	1	400V/3/50HZ	1*φ300	2150	120	380V
CE-CAJ9513T	CAJ9513T	1-1/8	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ9513T	TAJ9513T	1-1/8	400V/3/50HZ	1*φ350	3110	145	380V
CE-CAJ4517E	CAJ4517E	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4517T	TAJ4517T	1-1/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-CAJ4519T	CAJ4519T	1-3/4	220-240/1/50HZ	1*φ350	2980	138	220V
CE-TAJ4519T	TAJ4519T	1-3/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH4522F	FH4522F	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4522F	TFH4522F	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4524F	FH4524F	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4524F	TFH4524F	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4531F	FH4531F	2-3/4	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH4531F	TFH4531F	2-3/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH4540F	FH4540F	3-1/2	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH4540F	TFH4540F	3-1/2	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG4546T	TAF4546T	4	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4553T	TAF4553T	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4561T	TAG4561T	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4568T	TAG4568T	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG4573T	TAF4573T	6	400V/3/50HZ	2*φ400	7800	380	380V
CE-AJ5512E	AJ5512E	1	220-240V/1/50HZ	1*φ300	1664	85	220V

CE-AJ5515E	AJ5515E	1-1/4	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ5515E	TAJ5515E	1-1/4	400V/3/50HZ	1*φ350	3110	145	380V
CE-AJ5519E	AJ5519E	1-1/2	220-240V/1/50HZ	1*φ350	2980	138	220V
CE-TAJ5519E	TAJ5519E	1-1/2	400V/3/50HZ	1*φ350	3110	145	380V
CE-FH5524E	FH5524E	2	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH5524E	TFH5524E	2	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH5531E	FH5531E	2-3/4	220-240V/1/50HZ	1*φ400	3900	180	220V
CE-TFH5531E	TFH5531E	2-3/4	400V/3/50HZ	1*φ400	3900	190	380V
CE-FH5540E	FH5540E	3-1/3	220-240V/1/50HZ	2*φ350	5960	276	220V
CE-TFH5540E	TFH5540E	3-1/3	400V/3/50HZ	2*φ350	6220	290	380V
CE-TAG5546E	TAG5546E	3-5/6	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5553E	TAG5553E	4-1/2	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5561E	TAG5561E	5	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5568E	TAG5568E	5-2/3	400V/3/50HZ	2*φ400	7800	380	380V
CE-TAG5573E	TAG5573E	6	400V/3/50HZ	2*φ400	7800	380	380V

□□

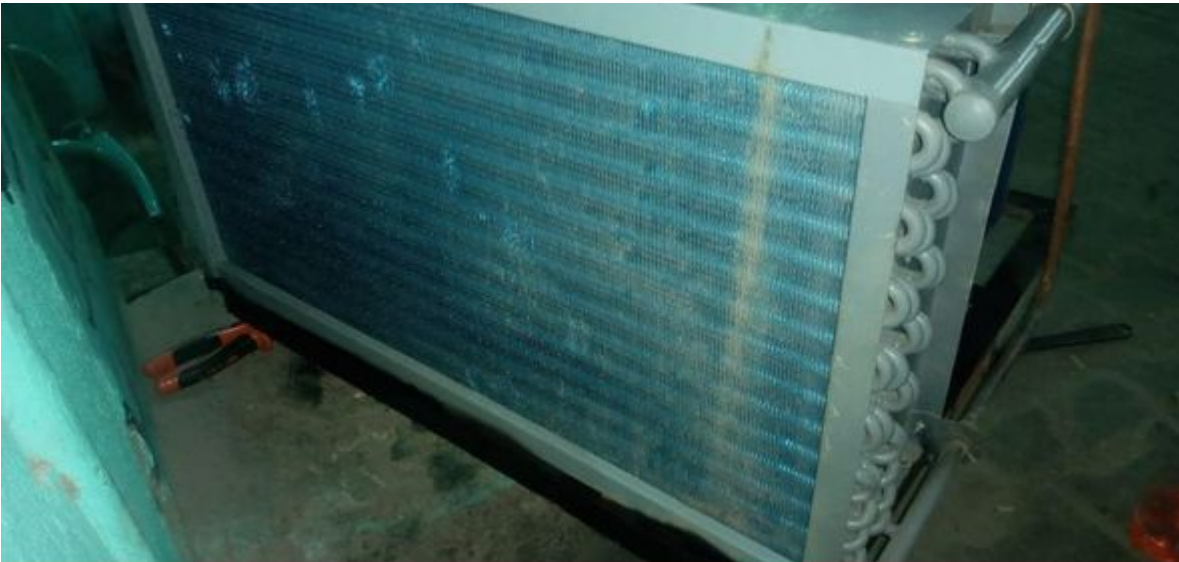

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

LOW BACK PRESSURE COMPRESSORS

商用低回压压缩机

COMPRESSOR MODELS 压缩机型号	Nominal Power(H.P.)						REFRIGERATION CAPACITY AT 50 Hz Rated @54.5°C Cond.Temp(Watts) 50Hz制冷量, 测试标准在 54.5°C 冷凝温度下							VOLTAGE 电压 ③
	名义 马力 (匹)	制 冷 剂	Refrigerant		Expansion device		Evaporating Temperature 蒸发温度							
			Displacement(cm ³)		① 膨 胀 装 置	② 冷 却 法	-45°C	-40°C	-35°C	-30°C	-23.3°C	-20°C	-10°C	
			气 缸 排 气 量	装 油 量										
R404A														
AEZ2415Z	7/16	R404A	8.1	350	C,V	F			160	231	355	429	703	220-240V/ 1/ 50Hz
CAE2417Z	7/16	R404A	11.3	350	C,V	F	37.8 ^④	62	161	280	460	557	891	220-240V/ 1/ 50Hz
CAE2420Z	1/2	R404A	12.6	350	C,V	F	194 ^④	179	232	357	547	654	1047	220-240V/ 1/ 50Hz
CAE2424Z	5/8	R404A	15.1	350	C,V	F	228 ^④	180	291	442	664	783	1199	220-240V/ 1/ 50Hz
CAJ2428Z TAJ2428Z	3/4	R404A	15.2	887	C,V	F			306	434	628	773	1246	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ2432Z TAJ2432Z	3/4	R404A	18.3	887	C,V	F	331 ^⑥	265 ^④	318	510	792	950	1560	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ2440Z	1	R404A	21	887	C,V	F	532 ^⑥	394 ^④	452	647	975	1166	1876	220-240V/ 1/ 50Hz
CAJ2446Z TAJ2446Z	1	R404A	26.15	887	C,V	F	702 ^⑥	575 ^④	549	797	1194	1423	2290	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ2464Z TAJ2464Z	1-1/2	R404A	34.45	887	C,V	F	805 ^⑥	626 ^④	723	1076	1605	1902	3012	220-240V/ 1/ 50Hz 400V/ 1/ 3/50Hz
FH2480Z TFH2480Z	2	R404A	53.2	1625	C,V	F	292 ^④	420 ^④	738	1319	2183	2662	4419	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH2511Z TFH2511Z	3	R404A	74.25	1625	C,V	F	1561 ^④	1203 ^④	1380	2016	3135	3796	6222	220-240V / 1 / 50Hz 400V / 3 / 50Hz
TAG/TAGP2516Z ^⑦	4	R404A	112.5	1960	C,V	F	1696 ^④	1407 ^④	1743	2704	4356	5335	9038	400V / 3 / 50Hz
TAG/TAGP2522Z ^⑦	6	R404A	134.8	1960	C,V	F	2541 ^④	2012 ^④	2378	3542	5522	6688	11062	400V / 3 / 50Hz
TAGD2532Z	8	R404A	225	3920	C,V	F	3392 ^④	2814 ^④	3486	5409	8712	10671	18076	400V / 3 / 50Hz
TAGD2544Z	12	R404A	269.6	3920	C,V	F	5082 ^④	4024 ^④	4756	7084	11044	13376	22125	400V / 3 / 50Hz

说明 NOTES

- ① C-毛细管 V-膨胀阀
- ② F-风扇冷却
- ③ 如有需要, 可代订其他电压型号, 详情请与本公司联络
- ④ 冷凝温度为50°C
- ⑤ 冷凝温度为45°C
- ⑥ 冷凝温度为40°C
- ⑦ TAGP型号是用于并联安装应用, 配备油、气平衡接口

SE 低噪音和高效系列

MEDIUM/HIGH BAK PRESSURE COMPRESSORS

商用中/高回压压缩机

COMPRESSOR MODELS 压缩机型号	Nominal Power(H.P.)						REFRIGERATION CAPACITY AT 50 Hz Rated @54.5°C Cond.Temp(Watts) 50Hz制冷量, 测试标准在 54.5°C 冷凝温度下						VOLTAGE 电压 ③
	名义 功率 (匹)	制 冷 剂	Refrigerant		Expansion device		Evaporating Temperature 蒸发温度						
			气 缸 排 气 量	装 油 量	① 膨 胀 装 置	② 冷 却 法	-25°C	-15°C	-10°C	0°C	+7.2°C	+15°C	
R22													
AEZ4425E	1/5	R22	4.50	250	C,V	F	138 ⁵	192	256	413	553	728	220-240V/1/ 50Hz
AEZ4430E	1/4	R22	5.70	250	C,V	F	192 ⁵	255	336	538	718	945	220-240V/1/ 50Hz
AEZ3440E	1/3	R22	7.55	350	C	F	308 ⁵	362	464	733	980	1298	220-240V/1/ 50Hz
AEZ4440E	1/3	R22	7.55	350	C,V	F	308 ⁵	362	464	733	980	1298	220-240V/1/ 50Hz
AEZ9440T	1/3	R22	7.55	350	C,V	F	222	362	464	733	975	1302	220-240V/1/ 50Hz
CAE4450E	3/7	R22	9.40	350	C,V	F	355 ⁵	426	554	896	1212	1623	220-240V/1/ 50Hz
CAE9450T	3/7	R22	9.40	350	C,V	F	256	426	554	896	1212	1623	220-240V/1/ 50Hz
CAE9460T	1/2	R22	11.30	350	C,V	F	324	553	715	1134	1514	2000	220-240V/1/ 50Hz
CAJ9480T TAJ9480T	5/8	R22	15.20	887	C,V	F	461	786	1011	1586	2103	2761	220-240V/1/ 50Hz 400V/3/50Hz
CAJ9510T TAJ9510T	1	R22	18.30	887	C,V	F	545	956	1229	1909	2510	3266	220-240V/1/ 50Hz 400V/3/50Hz
CAJ9513T TAJ9513T	1-1/8	R22	24.20	887	C,V	F	526	1074	1451	2411	3272	4366	220-240V/1/ 50Hz 400V/3/50Hz
CAJ4517E TAJ4517T	1-1/4	R22	25.95	887	C,V	F	771 ⁵	1233	1673	2727	3629	4743	220-240V/1/ 50Hz 400V/3/50Hz
CAJ4519T TAJ4519T	1-3/4	R22	34.45	887	C,V	F	1382 ⁵	1780	2304	3601	4738	6162	220-240V/1/ 50Hz 400V/3/50Hz
FH4522F TFH4522F	2	R22	39.95	1480	C,V	F	1068 ⁵	1598	2202	3774	5206	7042	220-240V/1/ 50Hz 400V/3/50Hz
FH4524F TFH4524F	2	R22	43.50	1480	C,V	F	1463 ⁵	1841	2456	4131	5706	7759	220-240V/1/ 50Hz 400V/3/50Hz
FH4531F TFH4531F	2-3/4	R22	56.65	1480	C,V	F	1780 ⁵	2620	3504	5659	7528	9854	220-240V/1/ 50Hz 400V/3/50Hz
TFH4538E	3	R22	67.50	1625	C,V	F		3100	4169	7041	9659	13400	400V/3/50Hz
TFH4540F	3-1/2	R22	74.25	1480	C,V	F	1299 ⁵	3000	4301	7330	9863	12938	400V/3/50Hz
TAG/TAGP4546T ⁷	4	R22	90.20	1960	C,V	F	1328	3103	4368	7839	11253	15961	400V/3/50Hz
TAG/TAGP4553T ⁷	4-1/2	R22	100.70	1960	C,V	F	1528	3875	5306	9105	12927	18406	400V/3/50Hz
TAG/TAGP4561T ⁷	5	R22	112.50	1960	C,V	F	2059	4465	6133	10593	14870	20658	400V/3/50Hz
TAG/TAGP4568T ⁷	6	R22	124.40	1960	C,V	F	2493	5157	6967	11862	16676	23359	400V/3/50Hz
TAG/TAGP4573T ⁷	6	R22	134.80	1960	C,V	F	2803	5629	7501	12632	17816	25204	400V/3/50Hz
TAGD4590T	7-1/2	R22	180.40	3920	C,V	F	2656	6206	8735	15678	22506	31922	400V/3/50Hz
TAGD4610T	9	R22	201.40	3920	C,V	F	3055	7750	10613	18211	25844	36811	400V/3/50Hz
TAGD4612T	10	R22	225.00	3920	C,V	F	4117	8929	12267	21186	29739	41315	400V/3/50Hz
TAGD4614T	12	R22	248.80	3920	C,V	F	4987	10314	13933	23724	33352	46718	400V/3/50Hz

MEDIUM/HIGH BAK PRESSURE COMPRESSORS

商用中/高回压压缩机

COMPRESSOR MODELS 压缩机型号	Nominal Power(H.P.)						REFRIGERATION CAPACITY AT 50 Hz Rated @54.5°C Cond.Temp(Watts) 50Hz制冷量, 测试标准在 54.5°C 冷凝温度下						VOLTAGE 电压 ③
	名义 马力 (匹)	制冷剂	Refrigerant				Evaporating Temperature 蒸发温度 -25°C -15°C -10°C 0°C +7.2°C +15°C						
			Displacement(cm ³)		Oil charge(cm ³)								
			气缸 排气 量	装 油 量	① 膨 胀 装 置	② 冷 却 法							
R22													
AEZ4425E	1/5	R22	4.50	250	C,V	F	138 ⁵	192	256	413	553	728	220-240V/ 1/ 50Hz
AEZ4430E	1/4	R22	5.70	250	C,V	F	192 ⁵	255	336	538	718	945	220-240V/ 1/ 50Hz
AEZ3440E	1/3	R22	7.55	350	C	F	308 ⁵	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ4440E	1/3	R22	7.55	350	C,V	F	308 ⁵	362	464	733	980	1298	220-240V/ 1/ 50Hz
AEZ9440T	1/3	R22	7.55	350	C,V	F	222	362	464	733	975	1302	220-240V/ 1/ 50Hz
CAE4450E	3/7	R22	9.40	350	C,V	F	355 ⁵	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9450T	3/7	R22	9.40	350	C,V	F	256	426	554	896	1212	1623	220-240V/ 1/ 50Hz
CAE9460T	1/2	R22	11.30	350	C,V	F	324	553	715	1134	1514	2000	220-240V/ 1/ 50Hz
CAJ9480T TAJ9480T	5/8	R22	15.20	887	C,V	F	461	786	1011	1586	2103	2761	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9510T TAJ9510T	1	R22	18.30	887	C,V	F	545	856	1129	1909	2510	3266	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ9513T TAJ9513T	1-1/8	R22	24.20	887	C,V	F	526	1074	1451	2411	3272	4366	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4517E TAJ4517T	1-1/4	R22	25.95	887	C,V	F	771 ⁵	1233	1673	2727	3629	4743	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
CAJ4519T TAJ4519T	1-3/4	R22	34.45	887	C,V	F	1382 ⁵	1780	2304	3601	4738	6162	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4522F TFH4522F	2	R22	39.95	1480	C,V	F	1068 ⁵	1598	2202	3774	5206	7042	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4524F TFH4524F	2	R22	43.50	1480	C,V	F	1463 ⁵	1841	2456	4131	5706	7759	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
FH4531F TFH4531F	2-3/4	R22	56.65	1480	C,V	F	1780 ⁵	2620	3504	5659	7528	9854	220-240V/ 1/ 50Hz 400V / 3 / 50Hz
TFH4538E	3	R22	67.50	1625	C,V	F		3100	4169	7041	9659	13400	400V / 3 / 50Hz
TFH4540F	3-1/2	R22	74.25	1480	C,V	F	1299 ⁵	3000	4301	7330	9863	12938	400V / 3 / 50Hz
TAG/TAGP4546T ⁷	4	R22	90.20	1960	C,V	F	1328	3103	4368	7839	11253	15961	400V / 3 / 50Hz
TAG/TAGP4553T ⁷	4-1/2	R22	100.70	1960	C,V	F	1528	3875	5306	9105	12927	18406	400V / 3 / 50Hz
TAG/TAGP4561T ⁷	5	R22	112.50	1960	C,V	F	2059	4465	6133	10593	14870	20658	400V / 3 / 50Hz
TAG/TAGP4568T ⁷	6	R22	124.40	1960	C,V	F	2493	5157	6967	11862	16676	23359	400V / 3 / 50Hz
TAG/TAGP4573T ⁷	6	R22	134.80	1960	C,V	F	2803	5629	7501	12632	17816	25204	400V / 3 / 50Hz
TAGD4590T	7-1/2	R22	180.40	3920	C,V	F	2656	6206	8735	15678	22506	31922	400V / 3 / 50Hz
TAGD4610T	9	R22	201.40	3920	C,V	F	3055	7750	10613	18211	25844	36811	400V / 3 / 50Hz
TAGD4612T	10	R22	225.00	3920	C,V	F	4117	8929	12267	21186	29739	41315	400V / 3 / 50Hz
TAGD4614T	12	R22	248.80	3920	C,V	F	4987	10314	13933	23724	33352	46718	400V / 3 / 50Hz



6546230100
TFH4531F



R22 LRA 31

400V 3~ 50Hz FLA 4.8

440V 3~ 60Hz FLA 5.1



54 M0511 90 075755 A

COUNTRY OF ORIGIN : FRANCE THERMALLY PROTECTED



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

[Mbsm_dot_pro_private_PDF_fh4540fTélécharger](#)

[Mbsm_dot_pro_private_PDF_fh4540f-1Télécharger](#)

[Mbsm_dot_pro_private_PDF_fh4540f-2-1Télécharger](#)