

Whirlpool, Aspera, NE2125E, LBP, capacitive, start inductive run, hermetic compressor, R22, 1/4Hp++ or 1/3Hp-


written by Lilianne | 18 March 2021

compressor Aspera NE2125E, LBP – R22, 220-240V / 1 / 50Hz,
stroke volume 8.78 cm³, LRA 11.0A, motor type CSIR, capillary
tube / expansion valve operation, oil AB 46. Cooling
capacity measured for condensation temperature of: 45 ° C,
Measurement conditions: ASHRAE

Unfortunately the compressor is no longer available.

If you would like an offer for an identical alternative,
please email us or give us a short call, we will prepare an
offer for you. Cooling capacity (W) at To

- 10 ° C	- 15 ° C	- 20 ° C	- 25 ° C	- 30 ° C
651	517	401	304	226

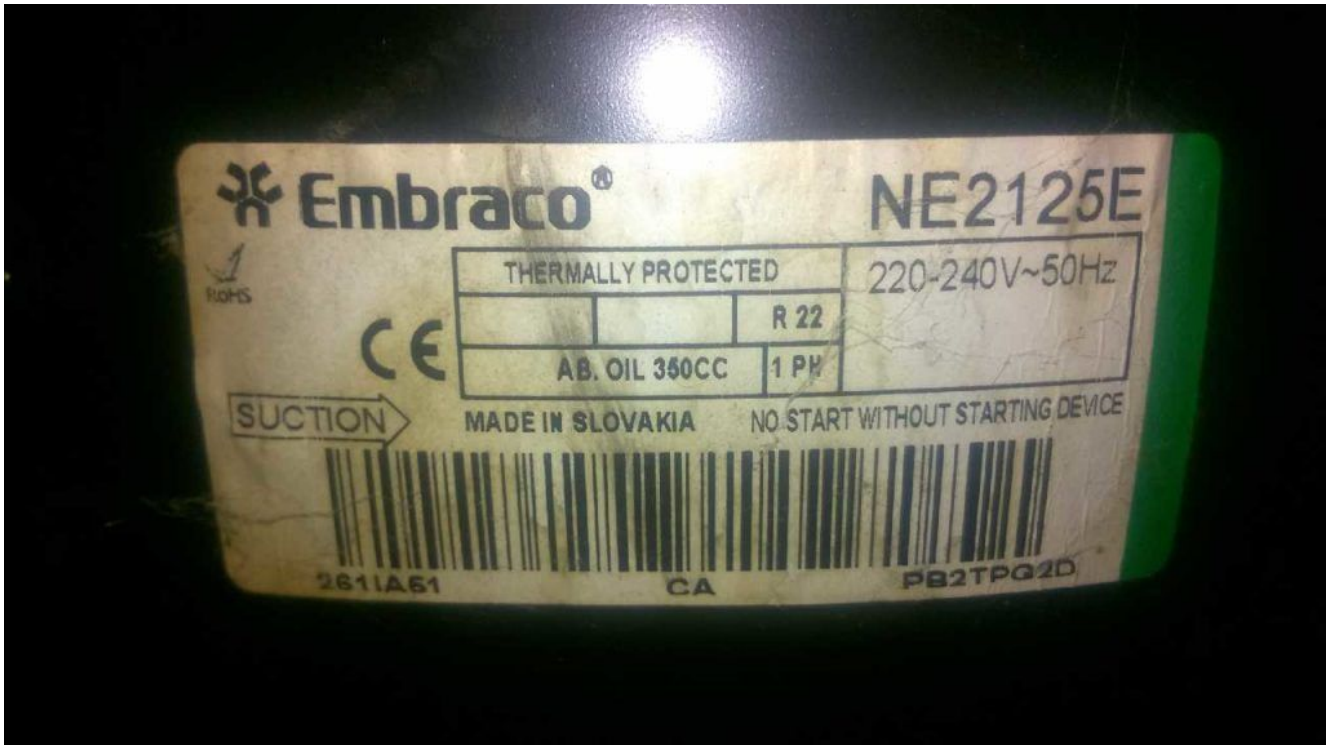

Private Picture Copyright : WWW.MBSM.PRO

R22 - LBP Applications

COMPRESSOR	FREQUENCY	DIMENSION	
		(from -30°C to -5°C evap. temp.)	-
NE2125E	50 Hz	0.91 mm I.D. x 3.2 m	-
	60 Hz	0.91 mm I.D. x 2.85 m	-
NE2134E	50 Hz	0.91 mm I.D. x 2.8 m	-
	60 Hz	0.91 mm I.D. x 2.5 m	-
T2140E	50 Hz	0.91 mm I.D. x 2.6 m	-
	60 Hz	0.91 mm I.D. x 2.3 m	-
T2155E	50 Hz	1.20 mm I.D. x 3.9 m	-
	60 Hz	1.20 mm I.D. x 3.5 m	-
T2168E	50 Hz	1.20 mm I.D. x 3.3 m	-
	60 Hz	1.20 mm I.D. x 2.8 m	-
NJ2178E	50 Hz	1.20 mm I.D. x 3.0 m	-

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO







Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ne2125e-Embraco_VerdichterTélécharger

Shipping Class	Default
Scope Of Application	LBP
Delivery Time	2-3 Weeks
Stock Availability	In Stock
Type	Reciprocating Piston
Condensation Temperature	45 ° C
Manufacturer	Aspera
Manufacturer No.	NE2125E
Power In Hp	1/4 +

Starting Torque	HST
Stroke Volume In Cm3	8.78
Measurement Conditions	Ashrae
Refrigerant	R22
Oil Type	ISO46
Series	NE
Condensing Units Compressors	Compressor
Tension	220-240V
Weight In Kg	10.4

Copeland, Piston Type, Maneurop, Scroll type, Compressor

written by Lilianne | 18 March 2021

Copeland, Piston Type, Maneurop, Scroll type, Compressor

Copeland - Piston Type

CRFD-0250TFD	2.5HP	220	30
CRFD-02750TFD	<3HP	220	30
CRFD-02750TFD	<3HP	380	30
CRFD-0300TFD	3HP	220	30
CRFD-0300TFD	3HP	380	30
CRFD-0400TFD	4HP	380	30
CRFD-0450TFD	4.5HP	380	30
CRFD-0500TFD	5HP	380	30

Copeland - Scroll Type

ZR22KC	2HP	220	16
ZR28KC	2.5HP	220	16
ZR34K1	3HP	220	16
ZR34K3	3HP	380	16
ZR36K1	>3HP	220	16
ZR36K3	>3HP	380	16
ZR47K3	4HP	380	16
ZR57K3	5HP	380	16
ZR61K3	>5HP	380	16
ZR72K3	6HP	380	16
ZR81K3	7HP	380	16
ZR94K3	8HP	380	16
ZR125K3	10HP	380	12
ZR144K3	12HP	380	12

Copeland - Piston type

QR90K1	7.5HP	380	4
QR12M1	10HP	380	4
QR15M1	12HP	380	4

Maneurop - Piston Type


MT28	7378BTU	220	8
MT36	9272BTU	380	8
MT40	10475BTU	380	8
MT50	12324BTU	380	8
MT64	15820BTU	380	8
MT80	19534BTU	380	8
MT100	23403BTU	380	4
MT125	30429BTU	380	4
MT160	38273BTU	380	4

Bristol - Piston type

H2NG104FRDF	8HP	380	8
H2NG124FRDF	10HP	380	8
H25G144DBEE	10HP	380	8
H2NG184FRDF	15HP	380	4
H2NG204FRDF	17HP	380	4
H2NG244FRDF	20HP	380	4
H2NG294FRDF	25HP	380	4
H24B25QDBEA	2HP	380	20
H24B28QDBEA	2.5HP	380	20
H24B31QDBEA	3HP	380	20
H24A62QDBEA	5HP	380	20

Compressor, ROHS, 1/3HP, R134A, Tecumseh, CAE4448Y, HBP, 208V/50HZ 230V/60HZ

written by Lilianne | 18 March 2021

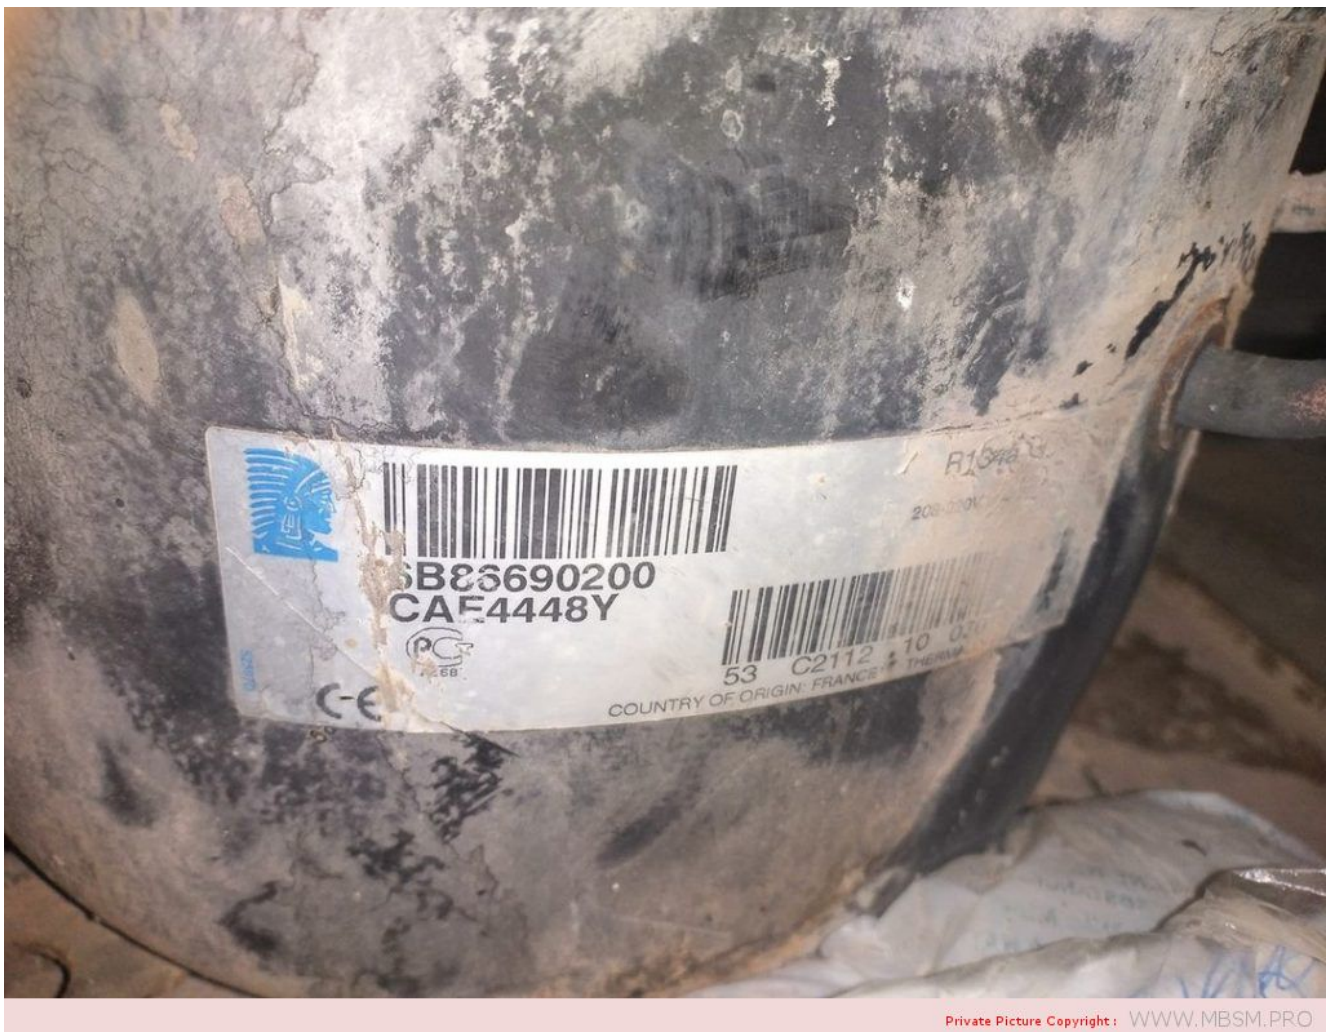

Basic Info.

Model NO.
CAE4448Y
Refrigerant Type
Ammonia
Refrigerant

R134A
Voltage
208V/50Hz 230V/60Hz
Horsepower
1/3HP
Capacity(W)
519W
Input Power(Kw)
400W
Oil Charge (Cm3)
450
Net Weight(Kg)
12kg
Cop(W/W)
1.64
Trademark
tecumseh
Transport Package
Wooden Box
Specification
208V/50HZ 230V/60HZ
Origin
France
HS Code
8414309010

**1/3HP HBP Original Made in France R134A Tecumseh Compressor
CAE4448Y Refrigerator Compressor For
Refrigerator/Showcase/Cold Room
Product Description**

Model: CAE4448Y

Brand : Tecumseh

Type: hermetic

Refrigerant: R134A

Voltage: 208V/50HZ 230V/60HZ

Cooling capacity: 519W

Input Power Watts: 400 W

Power: 1/3 HP

Description rapide

Condition:	Nouveau	Type:	Piston
Configuration:	Stationnaire	Source d'énergie:	Alimentation AC
Modèle de lubrifica...	Lubrifié	Muet:	Oui
Point d'origine:	Guangdong, China	Marque nom:	tecumseh
Numéro de Type:	CAE4448Y	Tension:	208 ~ 220V/1PH/50HZ
Dimension (L*W*H):	1 unité	Poids:	20kg
Certification:	ROHS	Garantie:	1 année
Service après-vente...	Aucun service d'outre-mer fourni	Gaz:	R134a
Chevaux:	1/3HP		

Private Picture Copyright: WWW.MBSM.PRO

Compressors	Displacement CC	Motor	Cooling capacity (Watt) EN12900 condensing T° +45°C , subcooling 0K, Return Gas 20°C							EN12900 evaporating T° -10°C		Weight Kg
			evaporating T°							Power input(Watt)	COP (W/W)	
			-15	-10	-5	0	5	10	15			
AE4425Y	6,69	CSIR	266	342	424	519	633	770	938	199	1,72	9,1
AEZ4425Y	7,6	CSIR	239	320	414	522	641	771	912	205	1,56	9,7
											9%	
AE4430Y	8,02	CSIR	254	382	488	613	760	930	1127	237	1,61	9,4
AEZ4430Y	8,8	CSIR	316	404	512	639	784	946	1122	258	1,57	10,2
											3%	
AE4440Y	10,33	CSIR	399	508	637	790	968	1176	1417	302	1,68	9,6
CAE4440Y	12	CSIR	399	519	666	837	1033	1250	1489	342	1,52	10,8
											10%	
AE4450Y	13,24	CSIR	526	672	843	1042	1273	1540	1847	370	1,82	10,5
CAE4448Y	14,2	CSIR	519	654	822	1023	1253	1512	1797	400	1,64	11,9
											10%	
AE4456Y	14,51	CSIR	579	737	921	1133	1380	1664	1990	424	1,74	11
CAE4456Y	16	CSIR	590	744	933	1156	1411	1695	2006	486	1,53	12,5
											12%	
AE4460Y	15,09	CSR	597	766	958	1181	1437	1732	2070	409	1,87	11,3

Private Picture Copyright: WWW.MBSM.PRO

Basic Info.

Model NO.	CAE4448Y	Refrigerant Type	Ammonia
Refrigerant	R134A	Voltage	208V/50Hz 230V/60Hz
Horsepower	1/3HP	Capacity(W)	519W
Input Power(Kw)	400W	Oil Charge (Cm3)	450
Net Weight(Kg)	12kg	Cop(W/W)	1.64
Trademark	tecumseh	Transport Package	Wooden Box
Specification	208V/50HZ 230V/60HZ	Origin	France
HS Code	8414309010		

Private Picture Copyright: WWW.MBSM.PRO

**Mbsm.pro, Donper, Hermetic,
Compressor , R600a, Lj126Cy,
Lu126cy1, 1/3 Hp, R600a**

written by Lilianne | 18 March 2021



Private Picture Copyright : WWW.MBSM.PRO


Mbsm.pro, Donper, Hermetic, Compressor , R600a, Lj126Cy, lu126cy1, 1/3 Hp, R600a

Panasonic, refrigerator, compressor, SB48C95GAW5, 110w, White-Westinghouse refrigerator, 220v, 50 Hz, 85L, R134A/80G, 1/6 Hp

written by Lilianne | 18 March 2021
Specification

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	4.8
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	110
COP@ASHRAE	1.03/0.99
Capacity@CECOMAF	–
COP@CECOMAF	–



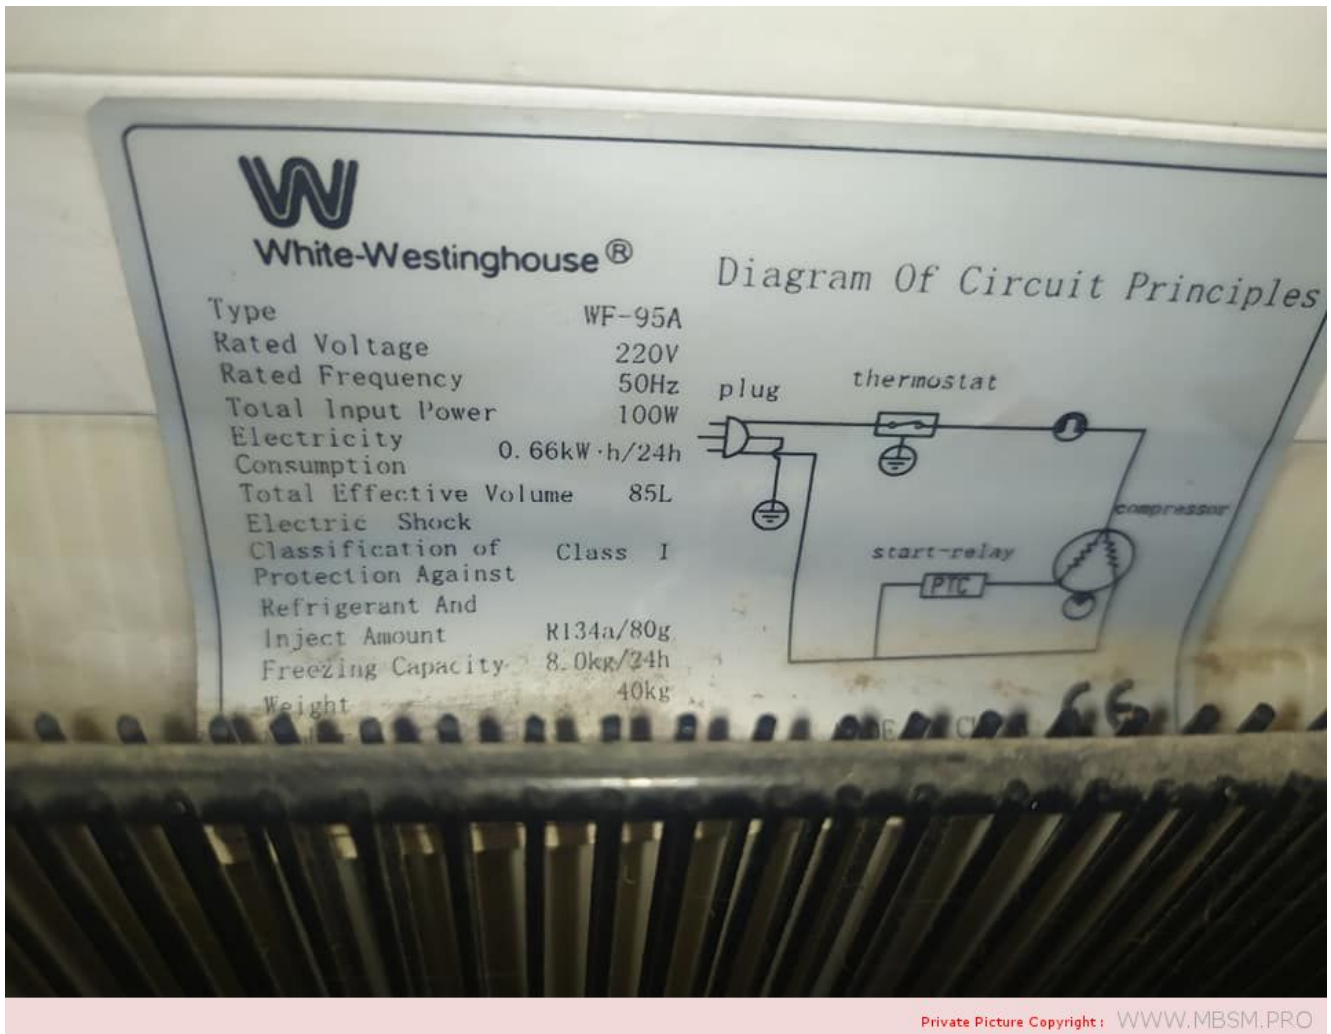

Mbsm_dot_pro_private_PDF_SB48C95GAW5Télécharger

**HERMETIC, Freezer,
COMPRESSOR, ZEL, GTH86AA,
R134A, 1/4 Hp, Lbp, 230W,
8.6CC**

written by Lilianne | 18 March 2021

COMPRESSOR ZEL GTH86AA

APPLICATION: LBP

FREON: R134A

DISPLACEMENT: 8.6CC

POWER SUPPLY: 220V

POWER: 1 / 4HP – 230W

APPLICATION: UNIVERSAL

Specifications

Description

Detailed Product Description

- 1.Low levels of noise and vibration
- 2.Standard,medium,high and very high levels of efficiency

R134a 220-240V/50HZ										
Model	Displ.(cm ³)	Motor Type	Cooling capacity(w)	Input Power		COP		Run Capacltor	Start Capacltor	Height(mm)
				without RC(w)	with RC(w)	without RC(w/w)	with RC(w/w)			
Standard Efficiency Range										
OF789	4.4	RSIR	110	102		1.08				174
OF1033A	5.7	RSIR	141	118		1.19				174
OF1350A	7.5	RSIR	178	158		1.13				183
GTH86AA	8.6	RSIR/RSCR	230	161	153	1.43	1.50	5		174
GTH93AA	9.3	RSIR/RSCR	260	182	173	1.43	1.50	5		183
Medium Efficiency Range										
GTM40AT	4.0	RSIR	102	91		1.12				163
GTM57AT	5.7	RSIR	156	128		1.21				183
GTM60AT	6.0	RSIR	165	136		1.27				163
GVY75AT	7.5	RSIR/RSCR	200	149	139	1.34	1.44	5		183
GTM75AA	7.5	RSIR	200	166		1.20			50	183
GTM93AA	9.3	RSIR	270	220		1.35				183
GTM10AA	11.0	RSIR/RSCR	300	222		1.35			50	183
GTM12AA	12.0	RSIR/RSCR	330	241		1.37			50	183



**Compressor, NL7.3FT, SECOP,
105G6726, DANFOSS, 6726,
105G, 105 G 6726, 105G 6726,
1/5 HP, 180W, LBP, Zanussi,
Kiriazi Electric Company, TGV**

335L, NO FROST, TSV 320L, FC 83L , R134A, 125G, 220-240V 50Hz, CSIR

written by Lilianne | 18 March 2021

R134a is a low pressure refrigerant, very efficient for high temperature applications.

This makes it ideal in air conditioning applications that may leak refrigerant like car air conditioning.

Now it is being phased out because of its high global warming potential and replaced by R134

R404a is a high pressure refrigerant ideal for applications in low and medium temperature.

You want low pressure refrigerants in household applications like refrigerators that may be inside kitchens with (possible) high ambient temperature, so you make sure nothing will blow up. For the same reason you want R134a in your car air conditioning.

R404a instead has pressures slightly above atmospheric in low temperature applications where R134a would have negative pressures and its heat transmission coefficients would be much lower.

Type de gaz	App	HP	Watt	Modèle	TL
R134A	LBP	1/6	134	TLY5.1FK	
R134A	LBP	1/4	183	TLES7FT.4	

R134A	LBP	1/5	156	NL6FT.2	NL
R134A	LBP	1/5	185	NL7.3FT (RSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (RSIR)	
R134A	LBP	1/4	185	NL7.3FT (CSIR)	
R134A	LBP	⁺ 1/4	219	NL9FT.2 (CSIR)	
R134A	LBP	1/3	284	NL10FT	
R134A	MBP	1/3	621	NL11MF	
R404A	LBP	1/3	433	NL7CLX	
R404A	LBP	1/3	471	NL8.4CLX	
R134A	LBP	1/4	187	NLY6F	
R134A	LBP	⁺ 4 / (1)	213	NLY7F	
R134A	LBP	1/3	237	NLY9FK	
R600A	LBP	⁺ 1/4	227	NLE13KTK.2	
R600A	LBP	1/3	253	NLE15KTK.2	
R600A	LBP	⁺ 1/4	225	NLX13KK.3	
R600A	LBP	1/3	254	NLX15KK.3	

R134A	LBP / MBP / HBP	1/3	264	SC12G	SC
R134A	LBP / MBP / HBP	1/2	392	SC18G	
R134A	LBP / MBP / HBP	3/4	456	SC21G	
R134A	MBP	3/4	1073	SC21MFX	
R134A	LBP	3/4	567	SC21FTX	
R404A	LBP	1	1033	ST21CL	
R404A	LBP	1	986	SC18CLX.2	
R404A	MBP	1/2	359/650	SC15MLX	
R404A	MBP	7/8	762/1584	SC18MLX	

KIRIAZI



CE



ELECTRIC
COMPANY

®

Product

No Frost Refrigerator

Class

T

Model

E 335N/3

Current / Amp.

1.1/~

Rated Voltage

220-240V/50HZ

Refrigerant

R 134a

125g

Rated input of lamp

1 x 25 W

Total Gross Volume

335 L

Ins : Basic

Type II

IPX4

Total Storge Volume

320 L

Freezing Capacity

4 kg/24hr

Freezer Capacity

83L

ES 6000 / 2008
ES 3793 / 2006

Tow Door Ref.

Serial Number

Made in Egypt



REDMI NOTE 8
AI QUAD CAMERA



● ○ REDMI NOTE 8
∞ AI QUAD CAMERA



Mbsm_dot_pro_private_PDF_NL7.3FTTélécharger
Mbsm_dot_pro_private_PDF_nl73ft_105g6731_r134a_220v_50hz_11-20
11_desd406c102Télécharger

model	watt	HP	LBP/MBP	نوع کمر	توضیحات
SC12G	246	1/3	LBP/MBP	134	
SC18G	392	1/2	LBP/MBP	134	
SC21G	456	3/4	LBP/MBP	134	
SC21MFX	1073	3/4	MBP	134	سکریو SC21G
SC21FTX	567	3/4	LBP	134	سکریو SC21G
SC12CL	629		LBP	404	
SC15CL	782		LBP	404	
SC18CLX.2	986		LBP	404	
TLS5FT(PTC)	134	1/6	LBP	134	
TLES5.7FT(PTC)	163	1/5	LBP	134	
TLES6.5FT(PTC)	183	1/4	LBP	134	سکریو NL7
NL6FT.2(PTC)*	156	1/5	LBP	134	
NL7FT.2(PTC)*	185	1/4	LBP	134	
NL9FT.2(PTC)*	219	1/4+	LBP	134	
NL10FT	284	1/3	LBP	134	سکریو SC12G (پارچه و مخزن)
NL11MF	621	1/3	MBP	134	سکریو SC12G (پارچه و مخزن)
NL7CLX	433		LBP	404	
NL8.4CLX	471		LBP	404	
NL7.3MF	393		MBP	134	
NL8.4MF	455		MBP	134	
NLY6F	187		LBP	134	سکریو NL7 - High efficiency (پارچه و مخزن)
NLY7F	213		LBP	134	سکریو NL9 - High efficiency (پارچه و مخزن)
NLY9FK	237		LBP	134	High efficiency (پارچه و مخزن)
BD50F	72		LBP/MBP	134	
BD350GH	167		LBP/MBP	134	
GS21MLX	2200		MBP	404	
GS26CLX	1430		LBP	404	
GS34CLX	2072		LBP	404	
GS26MLX	2866		MBP	404	
GS34MLX	3726		MBP	404	

(LBP @ -23.3°C ASHRAE) زیر صفر
(MBP @ -4.7°C ASHRAE) بالای صفر

**Refrigeration, Compressor,
K270CZ1, 1/3++, DONPER,
Dongbei, K325CZ1, K375CZ1**

, freezer, R134a, White HIK-BD-500 Chest Freezers, Top Open Door, -18 degrees to +10 degrees, 500L

written by Lilianne | 18 March 2021

Quick Details

Temperature:

-25° ~ +15°

Cooling Capacity:

1ton

Panel Thickness:

50mm

Applicable Industries:

Retail

After Warranty Service:

Online support

Local Service Location:

None

Showroom Location:

None

Condition:

New

Place of Origin:

Hubei, China

Voltage:

220V, 220V/50HZ

Dimension(L*W*H):

10-10*10

Weight:

15KGS

Certification:

CE ROHS

Warranty:

1 Year

After-sales Service Provided:

Online support, No overseas service provided

Key Selling Points:

Sustainable

Machinery Test Report:

Not Availabl

Video outgoing-inspection:

Provided

Marketing Type:

New Product 2020

Warranty of core components:

1 Year

Core Components:

Motor

Color:

Balck

Product name:
Refrigerator Compressor

Refrigerant:
R134a

model:
K270CZ1

Cooling capacity:
230W

Product Description

Refrigerant	R134a	Cooling capacity	270W
Input power	220W	Hose Power	220W
Temperature application	L/MBP	Displacement	9.5cm ³
Working Current	1.5A	Voltage	220V~240V/50Hz
COP	1.3W/W	Motor type	RSIR
Cylinder capacity	9.5cm ³	Weight	9.8±0.4kg

Structure





Private Picture Copyright : WWW.MBSM.PRO



PRODUCT PARAMETERS

MODEL NO.	K270CY1
COOLING CAPACITY	270W
REFRIGERANTS	R600a
INPUT POWER	208W
HORSE POWER	1/3+
DISPLACEMENT	16.2cm ³



Private Picture Copyright : WWW.MBSM.PRO



Product Specification

Capacity	500 L
Type	Top Open
Temperature Range	-18 degrees to +10 degrees
Model Number	HIK-BD-500
Model Number/Name	HIK-BD-500
Energy Consumption	2.02 kWh/24hr
Product Dimensions	1650 x 755 x 830mm
Door Type	Top Open Door
Color	White
Door No.	2
Features	Adjustable Temperature Control, Digital Display, 75mm Insulation Wall Thickness, Defrost Water Drain
Usage/Application	Freezer/Chiller
Weight	73kg
Depth	755mm

Refrigerant Used	R134a
Number Of Basket	2
Height	830 mm
Power Source	Electric
Energy Efficiency	2.02 kWh/24hr
Compressor Brand	Donper
Compressor Model	K270CZ1
Power	255 W
Width	1650 mm
Colour	White
Refrigerant	R134a
No of Doors	1
Number of Baskets	2

Product Description

Haikawa now launches its latest range of Chest Freezers in 200 L, 300 L, 400 L and 500 L variants. The freezers come with an Adjustable Temperature Control, enabling its use as a freezer (-18 degrees to 0 degrees) or as a chiller (0 degrees to 10 degrees), depending on requirement. The 75mm Insulation Wall Thickness helps improve energy efficiency, while the unique digital display brings in a whole new level of convenience. The Chest freezers come with removable baskets and a defrost water drain. The Inner PP lining improves hygiene while a lock and key mechanism ensures maximum safety. Insulation: Cyclopentane. Refrigerant: R134a. The HIK-BD-500 model has a rated current of 1.5A, thus lowering the power consumption. The Chest Freezer is packed with the following features:

- Adjustable Temperature Control
- Electronic Controller with Digital Display
- 75mm Insulation Wall Thickness

- Low Power Consumption
- Inner PP Lining for Improved Hygiene
- Store-More Removable Basket
- Defrost Water Drain
- Lid Handle
- Lock and Key Safety Mechanism

Additional Information

Packaging Details	Box Dimensions: 1695 x 760 x 880mm Included:1 Chest Freezer/ 1 Instruction Manual/ 2 Keys/ 2 Inner Metal Trays
-------------------	--





Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Description

Compresseur de réfrigérant R134a Donper K375CZ1 220-240V 50Hz
SC-SD-388Y

Réfrigérant: R134a

Tension: 220 V ~ 240 V / 50 HZ

Puissance en chevaux: 1/2 ph

Puissance d'entrée: 235 W

Capacité de refroidissement: 325 W

Cylindre de capacité: 11,4 centimètres cubes

Courant de travail: 1.6A

Type de moteur: CSIR

Poids: 9,9 ± 0 4 kg





Reciprocating Compressors, Q Series, Reciprocating Fixed Speed, R134a, 100g, LBP, QA66C14GAX5, RSIR, 145W, 1/5HP, 170L

written by Lilianne | 18 March 2021



Private Picture Copyright: WWW.MBSM.PRO

MODEL QA66C14GAX5
220V ~ 50Hz 1PH R134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
MADE IN MALAYSIA



Electrostar
الكتروستار

Model **ES170 T**

طراز

W **136** وات

A **1.12** أمبير

HZ **50** نبذبة

Ser No.



018018

ممسلسل

V

220

فولت

R134a **100 gm**

كزن وسيط
التبريد

Total Capacity 170 Lit.

Class T

صنع في مصر

Reciprocating Compressors, LBP – Low Back Pressure, R-134a, TECUMSEH, 1/3hp, TP1410YS,

written by Lilianne | 18 March 2021

TPH1410YHS

Wholesale and retail Tecumseh/Taikang compressor, Tecumseh/Taikang piston compressor model: TPH1410YHS, type: low back pressure, refrigerant: R-134a, power supply voltage: 230V ~ 50Hz, provide Tecumseh/taikang TPH1410YHS model, specifications, parameters, Picture, price and other data. Taikang is the world's leading manufacturer of hermetic compressors and condensers in household and commercial refrigeration and air conditioning applications Product model: TPH1410YHS Refrigerant: R-134a Power frequency: 50Hz Power supply voltage: 230V ~ 50Hz Product Type: Low back pressure



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_TP1410YS-Télécharger
Mbsm_dot_pro_private_PDF_TPH1410YGSTélécharger