

Mbsm.pro, Pdf, Is it useful to fill gas r22 in place of r410

written by Lilianne | 28 April 2022



Mbsm.pro, Pdf, Is it useful to fill gas r22 in place of r410

Mbsm.pro, Compressor, atk72x,

**HuaGuang, cmA069LHEM, LG,
1bp, 1/4 hp, 205 W, 699
Btu/h, 220-240V 50HZ,
Refrigerator, Fresh, FNT-
BR470K, 1 A, 376 L, R134a, 95
G, freezer**

written by Lilianne | 28 April 2022



Mbsm.pro, Compressor, atk72x, HuaGuang, cmA069LHEM, LG, 1bp,
1/4 hp, 205 W, 699 Btu/h, 220-240V 50HZ, Refrigerator, Fresh,
FNT-BR470K, 1 A, 376 L, R134a, 95 G, freezer

Mbsm.pro,

Compressor,

**THA125YP, 1/5 Hp, 145 W, Tee
compressor, 125 Kcal/c,
R134A, Lra 12.6 A, 208-220
vac 50 hz**

written by Lilianne | 28 April 2022




Private Picture Copyright : WWW.MBSM.PRO

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, THA125YP, 1/5 Hp, 145 W, Tee compressor, 125 Kcal/c, R134A, Lra 12.6 A, 208-220 vac 50 hz

**Mbsm.pro, Compressor,
hpl26yh-5, Serie YH, 1/4hp,
762 Btu/h, 192 kcal/c, R134A,
LBP, 220-240 v 50HZ**

written by Lilianne | 28 April 2022

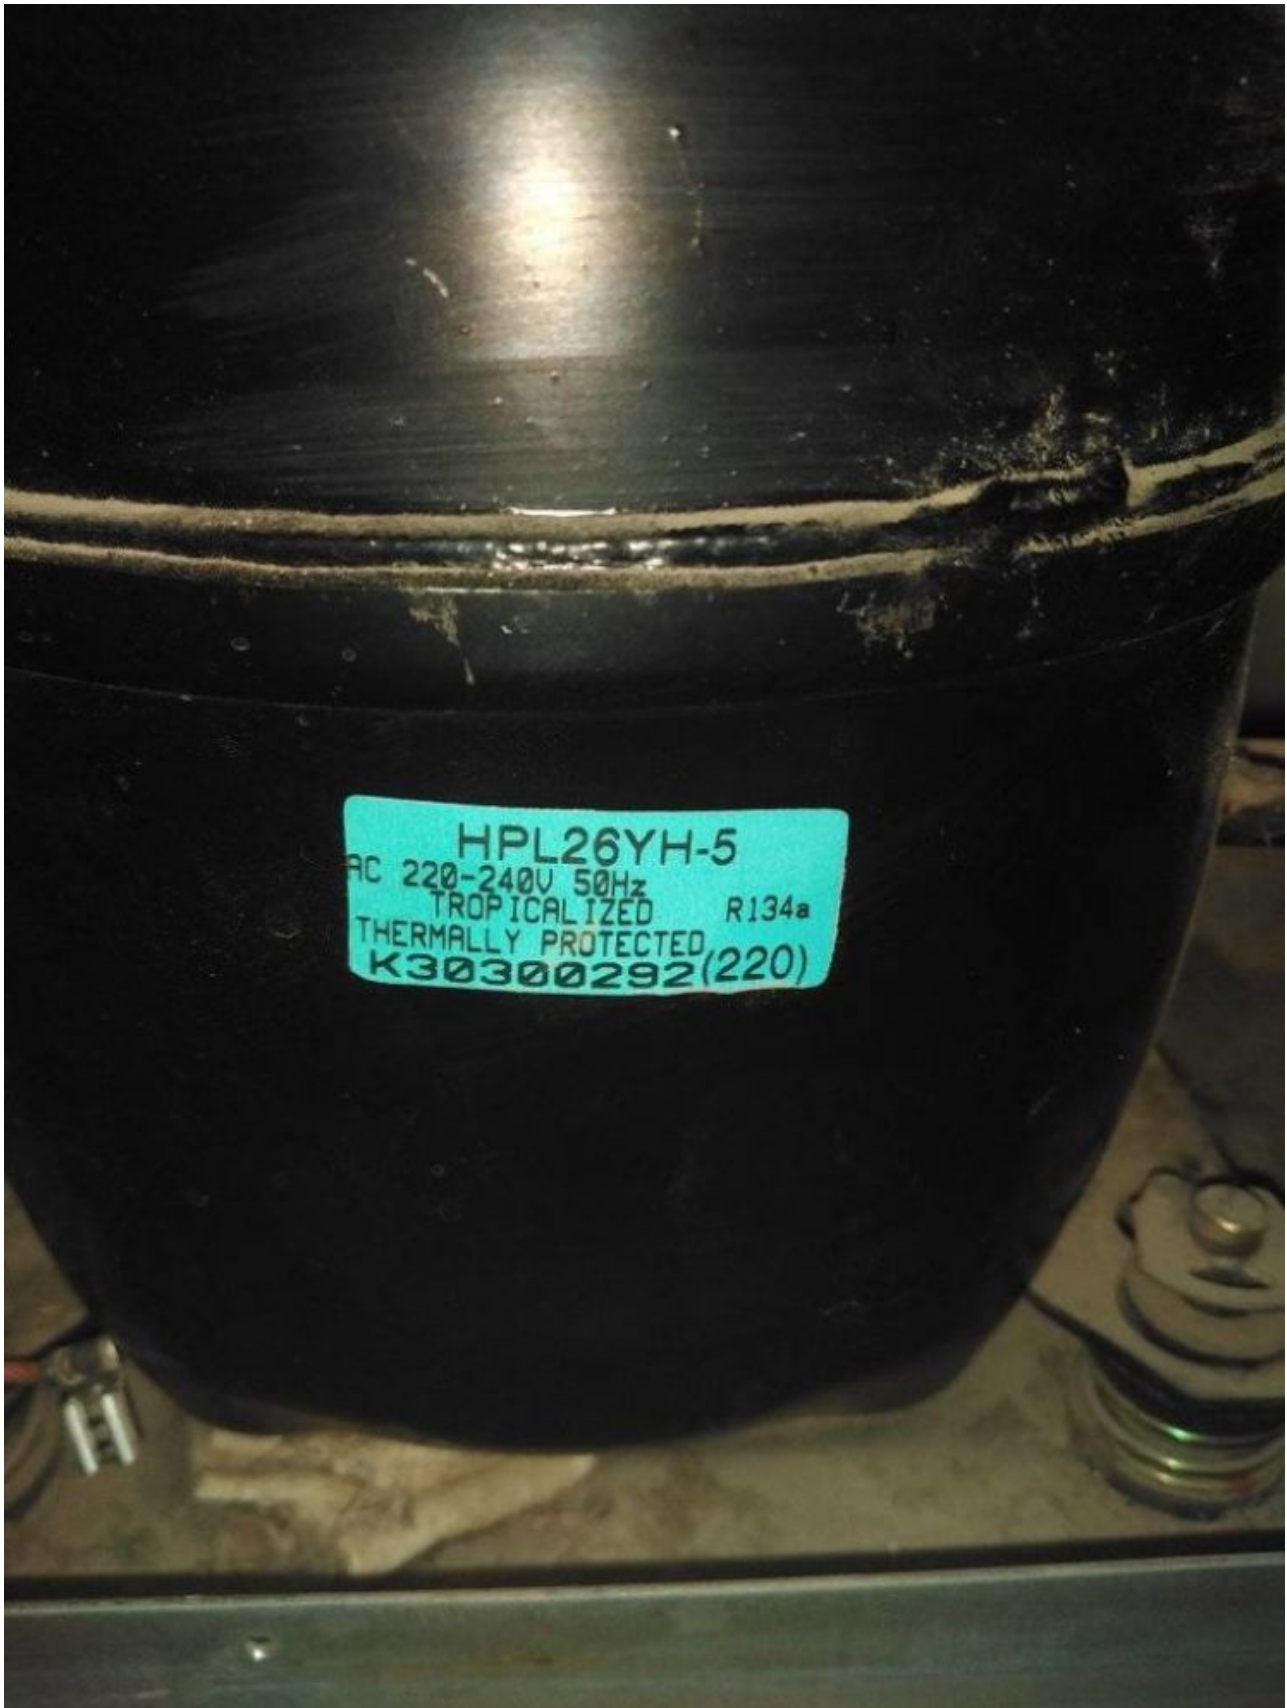

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, hpl26yh-5, Serie YH, 223 W, 762 Btu/h, 192 kcal/c, R134A, LBP, 220-240 v 50HZ

Mbsm.pro, Compressor, THK1365YGS, NL6FT, 550 Btu/h, 1/5 hp, Lbp, r134a, TECUMSEH, 168 w, TH865JF-010-BA4, MFSATH865CAA00

written by Lilianne | 28 April 2022

EMBRACO X MARKET

EMERSON		TECUMSEH		SECOP		LG		HUWAI	
	BTU/h	Compressor	BTU/h	Compressor	BTU/h	Compressor	BTU/h	Compressor	BTU/h
		THK1330YCF	280	TL4F	283				
		THK1340YCF	365	TL5F	382				
						MA42LPJG	365	HYB41Y	376
		THK1351YJF	445	TLESSF	457				
		THK1352YCF	460	TLES6F	485				
						MA53LJG	496	HYE55YL63	528
		THK1358YCF	500	NL6F	515				
		THK1365YCG	540	NL6FT	532	MA57LJG	548		
		THK1365YGS	540	NL6FT	532	MA62LJG	596	HYE60YL63	597
	601	THK1374YFS	600	NL7FT	631				
		THK2390YJE	770	NL9FT	747				
	803			NLY9FK	809				
	963			NL10FT	969				
	1028			SC12FT	1092				
		AE241SYGH	1170	SC15F	1092				
	1267			SC18FT	1320				
	1150			FR6CL	1047				
	1455			NL8.4CLX	1443,28				

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, THK1365YGS, NL6FT, 540 Btu/h, 1/6 hp, Lbp, r134a, TECUMSEH, 128 w, TH865JF-010-BA4, MFSATH865CAA00

**Mbsm.pro, COMPRESSOR,
CUBIGEL, GLY12RA, 3/8 HP++,
R134A, HMBP, 220/240V 50HZ**

written by Lilianne | 28 April 2022

cubigel
compressors

GLY12RA

220-240V~50Hz

PH1

R134a

THERMALLY PROTECTED




CE EAC

MADE IN SPAIN



08282



Mbsm.pro, COMPRESSOR, CUBIGEL, GLY12RA, 3/8 HP++, R134A, HMBP,
220/240V 50HZ

**Mbsm.pro, Compressor,
d91c18raws, 1/4 Hp, 227 W,
Lbp, R134a, 220v, 1 phase 50
hz, Compressor AC Panasonic,
D Series, 744 btu/h, 195
kcal/h**

written by Lilianne | 28 April 2022



D91C18RAW5 (RSIR) : Reciprocating Compressors (Fixed Speed)

Product

Reciprocating Compressors (Fixed Speed)

Series/Type

D Series (Reciprocating Fixed Speed, R134a, LBP)

Parts no

D91C18RAW5(RSIR)

SpecificationMbsm_dot_pro_private_PDF_PDF_panasonic-
compressor-Serie-D

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	9.1
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	227
COP@ASHRAE	1.29/1.24
Capacity@CECOMAF	–
COP@CECOMAF	–



Performance

Application : Low Back Pressure
 Refrigerant : R134a (CF₃CH₂F)
 Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
D	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-
				CSCR	227 / 288	1.29 / 1.39	-	-
D91C19CAS5	9.1	200V 50Hz	CSIR	227	1.28	-	-	
			CSCR	-	-	-	-	
D91C21RAX5	9.1	220V 50Hz	RSIR	227	1.28	-	-	

Mbsm_dot_pro_private_picture_D91C23GAX6Télécharger
 Mbsm_dot_pro_private_PDF_PDF_panasonic-compressor-Serie-DTélécharger



∨ D91C18RAW5

fx

	I	H	G	F	A	
220 / 240 / 50 HZ						1
COOLING CAPACITY				الإزاحة	MODEL	2
5	W -23	B T U	k CAL/HR	Displ.C		3
	135	461	116	5.1	D51C10RAW5	4
	135	461	116	5.1	D51C90RAW5	5
	141	481	121	5.7	D57C10RAW5	6
	141	481	121	5.7	D57C13RAX5	7
	160	546	138	6.6	D66C13RAW5	8
	151	515	130	6.6	D66C13RAX5	9
	186	635	160	7.7	D77C15RAW5	10
	186	635	160	7.7	D77C18RAX5	11
	227	774	195	9.1	D91C18RAW5	12
	227	774	195	9.1	D91C21RAX5	13
	298	1017	256	11.0	D110C21RAX5	14
	298	1017	256	11.0	D110C21RAZ5	15
	298	1017	256	11.0	D110C21RBX5	16
	298	1017	256	11.0	D110C24GAX5	17
						18
						19
						20
220 / 240 / 50 HZ						21
COOLING CAPACITY				الإزاحة	MODEL	22
5	W -23	B T U	k CAL/HR	Displ.C		23
	163	556	140	5.7	DA57C11RAY5	24
	184	628	158	6.6	DA66C12RAY5	25
	214	730	184	7.7	DA77C15RAY5	26
						27
					D B	28
	187	638	161	6.6	DB66C10RAW5	29
	184	628	158	6.6	DB66C12RAY5	30
	184	628	158	6.6	DB66C14RBX5	31
	204	696	175	7.3	DB73C13RAY5	32
	214	730	184	7.7	DB77C14RAY5	33
	214	730	184	7.7	DB77C16RBX5	34
	241	822	207	8.6	DB86C16RAY5	35
	253	863	218	9.1	DB91C14RAW5	36

+ دانفوس -

باناسونيك

ZMC



Mbsm.pro, Compressor, QD series, Compressor, Refrigerator, R134, R12, R134A, R406, R12/R134A/R406-LBP compressor performance parameter

written by Lilianne | 28 April 2022



Mbsm.pro, Compressor, QD series, Compressor, Refrigerator, R134, R12, R134A, R406, R12/R134A/R406-LBP compressor performance parameter

**Mbsm.pro, Compressor,
Tecumseh, TPG1390YMR, 805
btu/h, 236w, 1/3hp, LBP, Low
Back Pressure, R134a,
208-230V ~ 60Hz, 220-240V ~
50Hz, Reciprocating
Compressor, TP143-MR-232-B8**

written by Lilianne | 28 April 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, Tecumseh, TPG1390YMR, 805 btu/h, 236w, 1/3hp, LBP, Low Back Pressure, R134a, 208-230V ~ 60Hz, 220-240V ~ 50Hz, Reciprocating Compressor, TP143-MR-232-B8

**Mbsm.pro, Compressor,
Gtm75aa, HERMETIC, Freezer,
COMPRESSOR, ZEL, 1/5 hp,
R134a, 220-240V/50HZ, Ariston
no frost**

written by Lilianne | 28 April 2022



Private Picture Copyright: WWW.MBSM.PRO

<https://www.mbsmgrouppro.com/2433.htm>



Mbsm_dot_pro_private_PDF_GTM

75

AA

	a 134	LBP			68	232	58		2,8			GML 70 A
C R MF 2	a 134	LBP			92	314	79		3,4			GML 90 A
C R MF 2.5	a 134	LBP			113	386	97		4,1			GML 110 A
	a 134	LBP			120	409	103		4,1			GML 125 A
	a 134	LBP			140	478	120		4,9		1/6	GML 140 A
C R MF 5	a 134	LBP			140	478	120		4,9		1/6	GML 140 A/I
					160	546	138		5,7		1/6	GML 160 A
C R MF 5	a 134	LBP			180	614	155		6,5		1/5	GML 180 A
C R MF 5	a 134	LBP			200	682	172		7		1/5	GML 200 A
C R MF 6	a 134	LBP			210	716	181		7		1/5	GML 200 A/I
					65				2,6		1/9	GTM 26 AA
					200				7,5		1/5	GTM 75 AA
					280				10		1/3	GTM 93 AA
					300				10,6		1/3	GTM 10 AA
					320				12		1/3	GTM 12 AA
C R MF 4	a 134	LBP			167	570	144		5,7			GDL160 A
C R MF 5	a 134	LBP			165	563	142		6,5			GDL200 A
C R MF 4	a 134	LBP			106	362	91		4,1			GXL100 A
C R MF 5	a 134	LBP			123	420	106		4,3			GXL125 A
C R MF 5	a 134	LBP			138	471	119		4,6			GXL140 A
C R MF 4	a 134	LBP			160	546	138		5,7			GXL160 A
C R MF 5	a 134	LBP			195	665	168		7			GXL 200 A
C R MF 5	a 134	LBP			240	819	206		8,6			GXL 240 A



Private Picture Copyright: WWW.MBSM.PRO

model	motor	Exhaust volume	Motor power	Motor type	frequency	Cooling capacity	input power	Input power (RC)	Coefficient of performance	Performance coefficient (RC)	run capacitor	high	net weight
GTM12AA	With	12	1/3	CSIR	50	320	241	0	1.33	0	50	184	10
GTM10AA	With	10.6	1/3	CSIR	50	300	226	0	1.33	0	50	184	10
GTM93AA	With	10	1/3	hatch	50	280	207	0	1.35	0	0	184	9.5
GTM75AA	To the	7.5	1/5	CSIR	50	200	160	0	1.25	0	50	184	9
GTM26AA	Cu / AL	2.6	1/12	hatch	50	65	59	0	1.1	0	0	163	7.5
GL10TB	With	9.3	1/2	CSIR	50	880	429	0	2.05	0	50	184	10.2
GL90TB	To the	9.3	1/2	CSIR	50	860	420	0	2.05	0	50	184	10
GL80TB	With	7.5	1/2	CSIR	50	740	326	0	2.27	0	50	184	10
HKD12FSL		12		PPM	0	96	49~122	0	Upto1.97	0	0	184	8.5
HKD10FSK		10		PPM	0	83	44~122	0	Upto1.97	0	0	184	8
HKD86FSL		8.6		PPM	0	67	34~88	0	Upto1.97	0	0	184	8.6
GKD93AA	With	9.3	1/4	RSCR	50	270		163		1.66	6	184	10.4
GTT75AA	With	7.5	1/5	RSCR	50	210		134		1.57	4	184	10.1
GTT66AA	Cu / AL	6.6	1/6	RSCR	50	200		125		1.6	4	184	9.5
GTH93AA	Cu / AL	9.3	1/4	RSIR/RSCR	50	260	187	174	1.39	1.49	5	184	9.7
GTH86AA	Cu / AL	8.6	1/4	RSIR/RSCR	50	240	175	163	1.37	1.47	5	174	9
GVY75AA	Cu / AL	7.5	1/5	RSIR/RSCR	50	200	153	140	1.31	1.43	4	174	8.9

GVY66AA	Cu / Al	6.6	1/5	RSIR/RSCR	50	180	134	124	1.34	1.45	4	174	8.6
---------	------------	-----	-----	-----------	----	-----	-----	-----	------	------	---	-----	-----

Mbsm_dot_pro_private_picture_GTM 75 AATélécharger