

Mbsm.pro, conséquence , de mal fixer ,un chauffe bain électrique 100L

Category: Solutions,Tester ok
written by Jamila | 21 September 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

1. Il peut arriver que les fixations du nouveau chauffe-eau correspondent à celles de l'ancien, mais c'est assez rare.
Le plus souvent, vous devrez prendre les mesures des points d'accrochage du ballon, en fonction de la hauteur désirée. Un gabarit de perçage, souvent fourni par le fabricant, facilite le travail.

Mbsm.pro , Electrodesionisation EDI, Eau ne conduit pas le courant

Category: Technologie
written by Jamila | 21 September 2018
La production d'eau de haute pureté a généralement utilisé une combinaison de procédés de séparation par membrane et d'échange d'ion

mbsm.pro,COMPRESSEUR, GUY75AA ,R134 ,1/5 HP

Category: Technologie,Tester ok
written by Jamila | 21 September 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

Compressors of the hermetic type from the manufacturer ACC Cubigel Huayi Electrolux ZEM can be found in our online shop category compressors.

Mbsm.pro, Réfrigérateur, remplacement d'un moteur, R600a ,par un ,moteur R134a

Category: Solutions,Tester ok

written by Jamila | 21 September 2018

Bonsoir, MBSM.PRO

le remplacement d'un compresseur R600A par un compresseur R134A est possible a condition:

mbsm.pro , CUBIGEL Compressor GX21TB, 220-240 VOLTS, 5/8 HP , R134a

Category: Solutions,Tester ok

written by Jamila | 21 September 2018

COMPRESSOR

Displacement (cm ³)	20.72
Diameter (mm)	34.93
Stroke (mm)	21.62
Net Weight (Kg)	17
Oil type	ISO VG 46 ESTER
Oil charge (cm ³)	500

MOTOR

Approximate Power (CV)	5/8
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	82,197
Type	CSIR
Phase number	1 PH
Locked rotor current (A)	26.0
Main W. resist. at 25°C (Ω)	2.45
Start W. resist. at 25°C (Ω)	25.9

APPLICATION

Application	High/Mid. back pressure
Refrigerant	R134a
Evaporating (°C)	-25 to 10
Expansion	Capillar/Valve
Comp. cooling	Fan cooled
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE

	CYCLE C	CYCLE D
Cooling capacity (W)	1550	1855
Input power (W)	818	850
EER (kcal/Wh)	1.62	1.87
COP (W/W)	1.89	2.18
Current (A)	5.16	5.29

TEST CONDITIONS

	CYCLE C	CYCLE D
Evaporating temp. (°C)	5.0	7.2
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	46.0
Ambient t. and return (°C)	32.0	35.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

ELECTRICAL COMPONENTS

Relay	9660 A 180	MTRP 16
Pick-Up (A)	16.70	16.70
Drop-Out (A)	14.00	14.00
Protector	MRA38128	T0535/G.
Current (A)	17.0	17.0
Time check (seg)	7.5-14	7.5-14
Disc temp. (Open/Close) (°C)	105.0 / 52.0	105.0 / 52.0


PictureS Mbsm Dot Pro : www.mbsm.pro

mbsm.pro , CUBIGEL Compressor GX21TB, 220-240 VOLTS, 5/8 HP , R134a

Mbsm.pro , BILLES EN ALUMINE D'HAUTE DENSITÉ HITO 92HD ,Filtre déshydrateur

Category: Solutions, Tester ok

written by Jamila | 21 September 2018

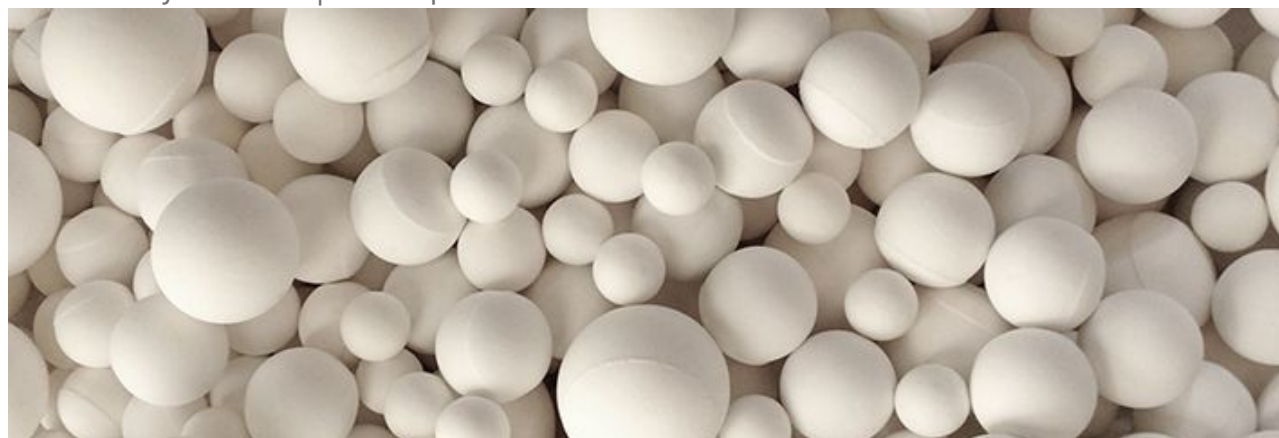

PictureS Mbsm Dot Pro : www.mbsm.pro

Les billes d'alumine fabriquées par Hito Technical Industries, 92HD, sont des billes avec un contenu minimum d'alumine du 92% ; ainsi, elles deviennent les billes avec la densité la plus haute du marché. Les billes HITO 92HD se caractérisent pour leur haute résistance à l'usure dû à la stricte sélection des

dopants de sintérisé de l'alumine, lesquels nous permettent réguler parfaitement la température de cuisson et, par la suite, réguler la structure cristalline que s'en forme. Cette faible tasse d'usure,

www.mbsm.pro, cOMPRESsOR A/A , R22
,124MBTU, 220V/380v, 3HP,
H25G124DBDE, BRISTOL

Category: Solutions,Tester ok
written by Jamila | 21 September 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

www.mbsm.pro, cOMPRESsOR A/A ,124MBTU, 220V/380v, 3HP, H25G124DBDE, BRISTOL

www.mbsm.pro, Branchement de
Contacteur ,De Réponse Carte mère,
Climatiseur ,Sharp

Category: Solutions,Tester ok
written by Jamila | 21 September 2018



PictureS Mbsm Dot Pro : www.mbsm.pro

www.mbsm.pro, Branchement de Contacteur ,De Réponse Carte mère, Climatiseur ,Sharp

www.mbsm.pro , compressor, R134a ,ff16hak ,170 watt ,1/4 HP ,1PH

Category: Solutions,Tester ok

written by Jamila | 21 September 2018

www.mbsm.pro , compressor, R134a ,ff16hak ,170 watt ,1/4 HP ,1PH

www.mbsm.pro , Critères de température,compresseurs rotatifs monophasés

Category: Solutions,Tester ok

written by Jamila | 21 September 2018

The compressors have been defined to work in the following maximum environments

(ventilated compressors).

Note :

For applications in air conditioning at higher ambient temperature, see our range

Tropical. This range of R-134a products has an evaporation range of -10°C to $+30^{\circ}\text{C}$, and

a condensing range of $+30^{\circ}\text{C}$ to $+80^{\circ}\text{C}$ for a room temperature of 55°C .

Discharge temperature

The discharge temperature measured under extreme operating conditions by a thermocouple welded on the discharge tube at 5 cm from the compressor and thermally insulated

10 cm, must be at most 127°C . This corresponds to the maximum permissible temperature.