

**Medium and High Back Pressure
Compressors, M/HBP, RSIR,
TECUMSEH, 1/5++ HP, R134a,
160g, TWB1374YGS, TW146GY,
220v/50-60, kiriazi defrost,
340L, k350, k350/1, Embraco,
ff17.5hak, tw146-gy-486,
twb1374ygs**

written by Lilianne | 12 April 2021

Medium and High Back Pressure Compressors, M/HBP, RSIR,
TECUMSEH, 1/5++ HP, R134a, 160g, TWB1374YGS, TW146GY,
220v/50-60, kiriazi defrost, 340L, k350, k350/1, Embraco,
ff17.5hak, tw146-gy-486, twb1374ygs

**LG rotary, compressor, model,
QJS222PMA, 12700BTU 5.6Amps,
EER = 10.7, air conditioner**

written by Lilianne | 12 April 2021

LG rotary, compressor, model, QJS222PMA, 12700BTU 5.6Amps, EER
= 10.7, air conditioner

**PH360G2C-4FTS1, 22000BTU,
GMCC, Compressor rotary, 2
Ton, air conditioner, R22,
refrigeration compressor ,
50HZ 220V / 240V**

written by Lilianne | 12 April 2021



Private Picture Copyright : WWW.MBSM.PRO

PH360G2C-4FTS1, 22000BTU, GMCC, Compressor rotary, air
conditioner, R22, refrigeration compressor , 50HZ 220V / 240V

Pressure and boiling Temperature list, standing, Refrigerant, suction, discharge

written by Lilianne | 12 April 2021

Some Refrigerant Standing, Suction, Discharge Pressure & Boiling Temperature List.

Refrigerant Name	Standing Pressure	Suction Pressure	Discharge Pressure	Boiling Temp
R-22	150-155 psi	60-70 psi	250-300 psi	-40.8 C
R-410a	225-230 psi	120-130 psi	450-500 psi	-51.4 C
R-134a	85-95 psi	12-15 psi		-26.2 C
R-600a	40-50 psi	Below 0-1 psi		-11.7 C
R-32	240-245 psi	110-115 psi		-52.0 C
R-290	125-130 psi	65-70 psi	275-300 psi	-42.1 C
R-407c	180-185 psi	75-80 psi	275-300 psi	-45.0 C
R-404a	180-185 psi	80-90 psi		-46.2 C
R-417	140 psi	65 psi	261 psi	



Private Picture Copyright: WWW.MBSM.PRO

Pressure and boiling Temperature list, standing, Refrigerant, suction, discharge

no frost, egl99aa zmc

**refrigerator, DF40, silver,
ideal, zanussi, IDEAL
ZANUSSI, EGL99AA ZMC, DF 40
Elgance, Compressor, ACC
Cubigel, Huayi, Electrolux,
ZEM GL99AA, GL99AA, LBP ,
R134a, 220-240V/1/50Hz, 1/4
HP, discharge 9.93 cm³, motor
type RSIR, LRA 14.4A**

written by Lilianne | 12 April 2021



Mbsm_dot_pro_private_PDF_GL99AA-compresseur-acc-cubigell-
gl99aaTélécharger

Mbsm_dot_pro_private_PDF_GL99AATélécharger

Compressor ACC Cubigel Huayi Electrolux ZEM GL99AA, LBP –
R134a, 220-240V/1/50Hz, 1/4 HP, discharge 9.93 cm³, motor type
RSIR, LRA 14.4A, expansion device: capillary, cooling:
static, weight 11 kg , the statutory warranty period shall
apply (24 months), Delivery time Info: with “immediately
available” and “scarce stock”, usually delivery within 2 days.
For “currently not available” delivery time usually 2 weeks or
delivery time in urgent cases contact us.

Refrigerant:	R134a
Power range(W):	101 – 200 W
Performance range (C):	-35 C to -10 C
Connecting size:	4,9 mm
Suction:	6,5 mm
Working area:	LBP
Design type:	Hermetic
Model series:	GL
Use with:	Capillary
Power range(HP):	0-2
Power supply:	230 V
Oil type:	ISO VG 22 Ester
Engine type:	RSIR
Article condition:	New
Info:	Oil filled
Shipping weight:	13,00 Kg
Dimensions (length × width × height):	23,10 × 16,20 × 18,60 cm
Cooling capacity condition:	T0 -25 C, Tk +55 C
Manufacturer:	ACC Cubigel Huayi Electrolux ZEM
Model:	GL99AA
Stroke volume (cm3):	9,93
Cooling capacity (W):	174
Power (HP):	0,25
Max. Starting current (A):	14,4
Max. Operating current (A):	1,31
Engine type:	RSIR

COP:	0,92
Note:	Static cooling
Conveying and suction volume (m3):	1,72
Oil quantity (l):	0,295
Compressor type:	Piston
Cooling:	Static
RPM:	2900
Power range:	-35 C to -10 C
Alternative:	HLY90AA, NL11F
Pressure line (mm):	4,9
Suction line (mm):	6,5

ZMC

C

GL99AA 0326

220-240V~50Hz



CE

R 134 a

MADE IN EGYPT



482

3975 6

GL99AAa VE09
220-240V 50Hz ~1

COMPRESSOR

Displacement (cm ³)	9.95
Diameter (mm)	25.4
Stroke (mm)	19.62
Net Weight (Kg)	9.6
Oil type	ISO VG 22 ESTER
Oil charge (cm ³)	295

MOTOR

Approximate Power (CV)	1/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	-
Type	RSIR
Phase number	1 PH
Locked rotor current (A)	14.0
Main W. resist. at 25°C (Ω)	9.96
Start W. resist. at 25°C (Ω)	20.39

ELECTRICAL COMPONENTS

Relay	PTC 3003 - K100		
Nominal voltage (V)	200 - 240		
Resistance μ	14.00		
Protector	MRP336JZ	T0377	AE11FU

APPLICATION

Application	Low back pressure
Refrigerant	R134a
Evaporating (°C)	-35 to -10
Expansion	Capillar
Comp. cooling	Static
Max. ambient temp. (°C)	43

NOMINAL PERFORMANCE

	CYCLE A	CYCLE B
Cooling capacity (W)	175	238
Input power (W)	189	200
EER (kcal/Wh)	0.79	1.02
COP (W/W)	0.92	1.19
Current (A)	1.31	1.34

TEST CONDITIONS

Evaporating temp. (°C)	-25.0	-23.3
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expan. (°C)	55.0	32.0
Ambient t. and return (°C)	32.0	32.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz



KGT1 موديل		الشركة العالمية لصناعة الأجهزة المنزلية - الاسكا		
السعة، ١،٣ اقدم	٢٢٠ فولت	٥٠ هيرتز	١٩٥ وات	١،٢ امبير
الشحنة، ١٧٠ جم ف ١٣٤ ا		التصنيف: ST		درجة الحماية، IPX2
صنع في مصر Made in Egypt		٢٠٠٥/٢٢٠	٣ ٢	No. 200



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO



Private Picture Copyright: WWW.MBSM.PRO




REDMI NOTE 9 PRO
AI QUAD CAMERA

Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

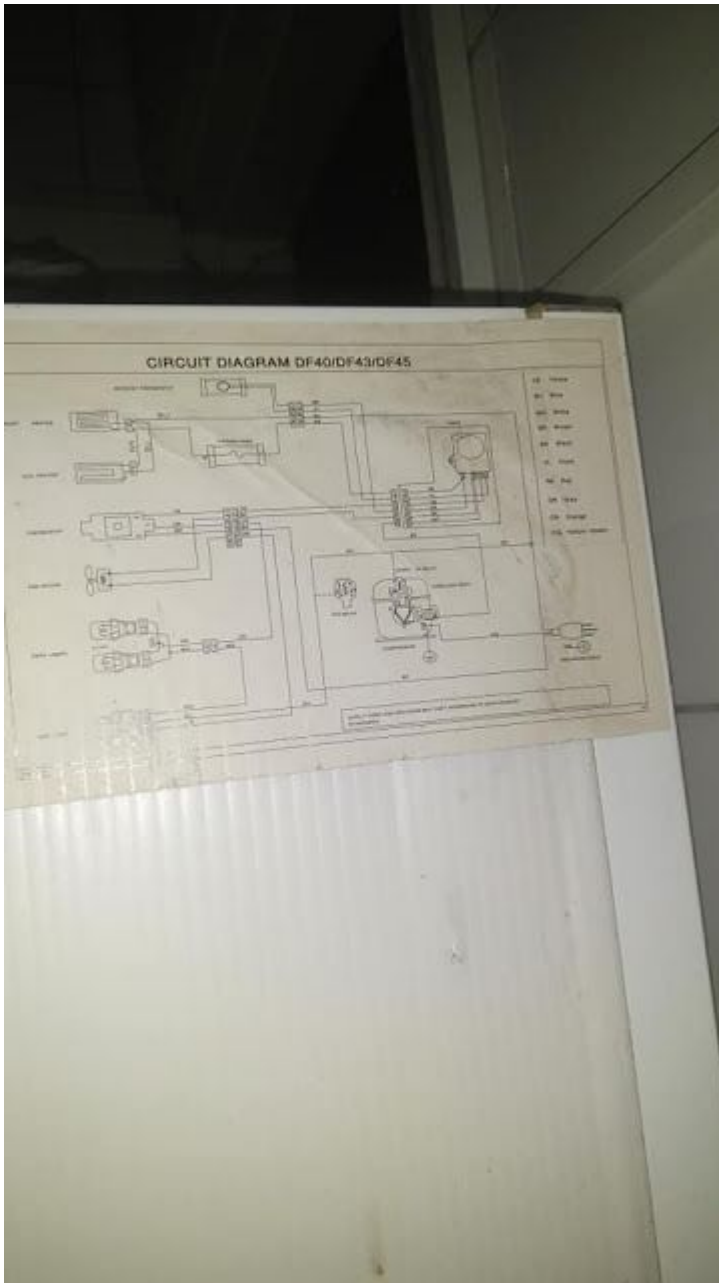

Private Picture Copyright : WWW.MBSM.PRO

ZMC EGL99AA 1002

220-240V~50Hz

R 134 a

MADE IN EGYPT



3 480

0250659 2



**Tecumseh, Copeland,
Compressor, Cross, Reference,**

P12FW, Compressor, R-12, 1/3HP, 230V, HMBP, ACC- ELECTROLUX, CUBIGEL/HUAYI

written by Lilianne | 12 April 2021

Tecumseh, Copeland, Compressor, Cross, Reference, P12FW,
Compressor, R-12, 1/3HP, 230V, HMBP, ACC-ELECTROLUX,
CUBIGEL/HUAYI

Types of Electrical Motors, RSIR, CSIR, RSCR, CSR, PTC, NTC, LST, HST, MBP, HBP, LBP

written by Lilianne | 12 April 2021

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected
after start

up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor.

Auxiliary winding is disconnected after start up. Standard
efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains
connected after start up.

Used for high efficiency in small capacity compressors
(particularly in
household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running).

Auxiliary winding remains connected after start up.

Used for high efficiency in small compressors and for size reduced

size motors in compressors with comparatively large displacements

Types of Electrical Motors

RSIR (Resistance Start-Induction Run)

LST motor. No capacitors. Auxiliary winding is disconnected after start up. Standard energy efficiency.

CSIR (Capacitor Start-Induction Run)

HST motor. With starting capacitor. Auxiliary winding is disconnected after start up. Standard efficiency.

RSCR (Resistance Start-Capacitor Run)

LST motor. With running capacitor. Auxiliary winding remains connected after start up. Used for high efficiency in small capacity compressors (particularly in household refrigeration)

CSR (Capacitor Start and Run)

HST motor. Two capacitors (starting and running). Auxiliary winding remains connected after start up. Used for high efficiency in small compressors and for size reduced size motors in compressors with comparatively large displacements.



Private Picture Copyright : WWW.MBSM.PRO

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/

medium-power motors with NTC (the NTC is connected in series with

the starting capacitor and the main purpose is to reduce the current

peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases

with the temperature. Device only with RSIR or RSCR motors in the

(Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases

with the temperature. Used in some CSR in order to reduce dimensions and components.

Type of starting device

Current relay – (electromechanical). RSIR/CSIR motors and CSR low/medium-power motors with NTC (the NTC is connected in series with the starting capacitor and the main purpose is to reduce the current peaks in the relay contacts)

Potential relay – (electromechanical). CSR high-power motors.

PTC – (Positive Temperature Coefficient), the resistance increases with the temperature. Device only with RSIR or RSCR motors in the (Small L, B), L and P ranges.

NTC – (Negative Temperature Coefficient), the resistance decreases with the temperature. Used in some CSR in order to reduce dimensions and components.



Private Picture Copyright : WWW.MBSM.PRO


Type of torque

LST – Low Starting Torque – Systems with capillary tube or balanced

pressures at start up.

HST – High Starting Torque – Systems with expansion valve or capillary tube, with unbalanced pressures at start up.



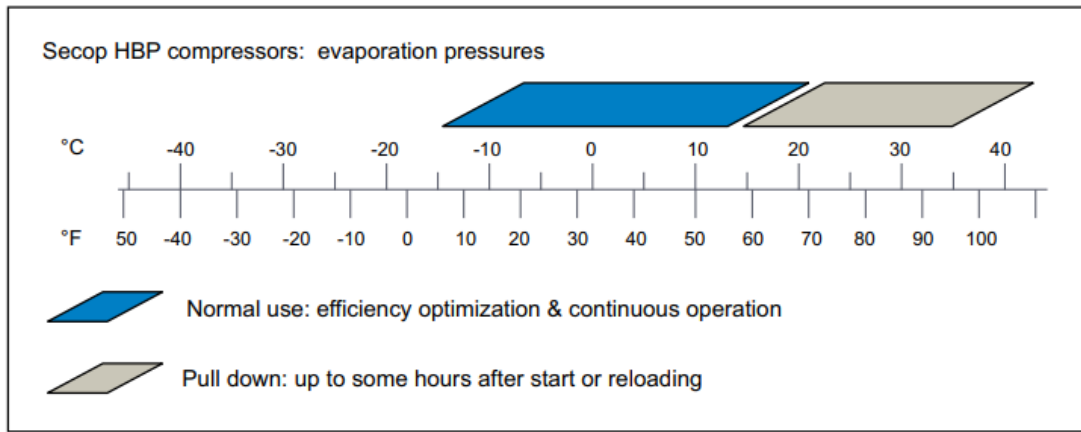

Private Picture Copyright : WWW.MBSM.PRO



Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

written by Lilianne | 12 April 2021

Catalogue, DANFOSS, All Compressor, PDF Catalogs, Documentation

Mbsm_dot_pro_private_PDF_DANFOSS-FRCC.PK_.046.A1.02Télécharger
 Mbsm_dot_pro_private_PDF_Danfoss_scroll_compressors_HXX_R410AT
 télécharger

Mbsm_dot_pro_private_PDF_DANFOSS-1Télécharger

Mbsm_dot_pro_private_PDF_DANFOSSTélécharger

ENGINEERING
TOMORROW

Danfoss

50 and 60Hz Catalogue

Danfoss **Light Commercial**
Refrigeration Compressors
B, U, L, P, X, S Ranges

R134a | R404A | R507 | R600a | R290

Private Picture Copyright: WWW.MBSM.PRO

**Compressor Embraco Aspera
NEK6210GK, MBP – R404A, R507,
220 – 240V/1/50Hz, 1/2 HP,
discharge 8.77 cm³, motor
type CSIR, lubricant type POE
22, lubricant charge 350
ml. 1318 W at +7.2 / +54.4 °,
expansion device: capillary**

or valve, cooling: fan cooling, weight 11 kg

written by Lilianne | 12 April 2021

Compressor ASPERA NEK6210GK | NEK 6210 GK

Compressor Embraco Aspera NEK6210GK, MBP – R404A, R507, 220 – 240V/1/50Hz, 1/2 HP, discharge 8.77 cm³, motor type CSIR, lubricant type POE 22, lubricant charge 350 ml.1318 W at +7.2 / +54.4 °, expansion device: capillary or valve, cooling: fan cooling, weight 11 kg

Refrigerant	R404A/R507
Working range[stC] MBP	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1303
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm ³]	8,77
Weight [kg]	11

Evaporating temperature +55 C

Evaporating Temperature	Cooling Capacity +/-5%	Power Consumption +/-5%	Current Consumption +/-5%	Gas Flow Rate +/-5%	Efficiency +/-7%			
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	384	447	1.525	365	2,36	11,99	1,05	1,22
-15	467	544	1.855	419	2,58	14,69	1,12	1,30
-10	574	668	2.278	470	2,79	18,18	1,22	1,42
-5	704	819	2.795	519	3,00	22,51	1,36	1,58
0	858	998	3.405	565	3,20	27,73	1,52	1,77
5	1.036	1.204	4.109	609	3,40	33,90	1,70	1,98
10	1.237	1.438	4.907	650	3,59	41,06	1,90	2,21

Substitutes for this compressor are: Electrolux ML90TB , L'Unite Hermetique/Tecumseh AE4450Z

Refrigerant:	R404A, R507
--------------	-------------

Embraco aspera

NEK6210GK



THERMALLY PROTECTED

220 - 240V - 50Hz

R 404A

POE: OIL 350°C

1 PH

SUCTION

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE



958CA51

LX

N10ZGP43

Specification for r-22 Compressor, Ph Rotary Models Specification, PH41VPJT, 2 Ton, Mitsubishi Rotary Compressor, 24000BTu

written by Lilianne | 12 April 2021

Product Specification

Horse Power	2 Ton
Brand	Mitsubishi
Compressor Technology	Rotary Compressor
Rental Available	No
Spares Available	No
Is It Portable	Yes
Installation/After Sales Service Available	No
Cylinder	1
Warranty	1 Year
Phase	Single
Weight	28 Kg
No. Of Cylinder	1
Cylinder Type	Round
Voltage	220 V

Material	Copper
Accessories	No
Application	AC
Color	Black



REFRIGERANT COMPRESSOR

MODEL PH41VPJT

DATE 28022004

PHASE

VOLT AC 220-240

FREQ. 50 Hz

L.R.A. 59/64 A

REFRIGERANT R-22

OIL MS-32N1

AP 28 Kg/cm^2

SP 84 Kg/cm^2



PH41VPJT A0019344AA

LICENSED BY MITSUBISHI ELECTRIC
SIAM COMPRESSOR INDUSTRY CO., LTD.

MADE IN
THAILAND

Mbsm_dot_pro_private_PDF_Rotary-CatalogueTélécharger

Mbsm_dot_pro_private_PDF_SCI_Rotary_Compressor-PHTélécharger