

**Mbsm.pro, Compressor, C-
R191H5C, Sanyo, 24000BTU, air
conditioner compressor, r22,
2 ton**

written by Lilianne | 14 April 2022

SANYO



MODEL C-R191H5C

CODE 80649745

QC PASSED



CHINA RESOURCES SANYO (SHENYANG) COMPRESSOR CO., LTD.
沈阳华润三洋压缩机有限公司

WARNING-SERVICEMAN

1. FIELD SERVICE LEAK TEST PRESSURE MUST NOT EXCEED 10.5KG FCM/G.
2. THIS COMPRESSOR MUST BE GROUNDED.
3. DO NOT OPERATE WITHOUT PROTECTIVE COVER OVER TERMINALS;
DISCONNECT ALL POWER BEFORE REMOVING THE PROTECTIVE COVER.

CAUTION

COMPRESSOR HOUSING MAY REACH 150°C WITH THERMAL PROTECTOR
APPROVED BY SANYO AND TESTED IN ACCORDANCE WITH DIN TUV.

Mbsm.pro, Compressor, C-R191H5C, Sanyo, 24000BTU, air conditioner compressor, r22, 2 ton

Mbsm.pro, Compressor, SG184SV-H6CUN, 1,5 hp, 12000btu/h, 1T, Hitachi, Rotary Compressor, Panasonic Rotary Compressor, Hitachi Compressor, Hitachi Rotary, SH286UY-C7HUA, 1.5 Hp, r22

written by Lilianne | 14 April 2022




Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, SG184SV-H6CUN, 1.5 hp, 12000btu/h, Hitachi, Rotary Compressor, Panasonic Rotary Compressor, Hitachi Compressor, Hitachi Rotary, SH286UY-C7HUA, 1.5 Hp, r22

Mbsm.pro, Compressor, Danfoss, SZ300A4cbb, 25 hp, 72800 W, 248300 Btu/h, R407C, 400v/3/50hz 460v/3/60hz

written by Lilianne | 14 April 2022

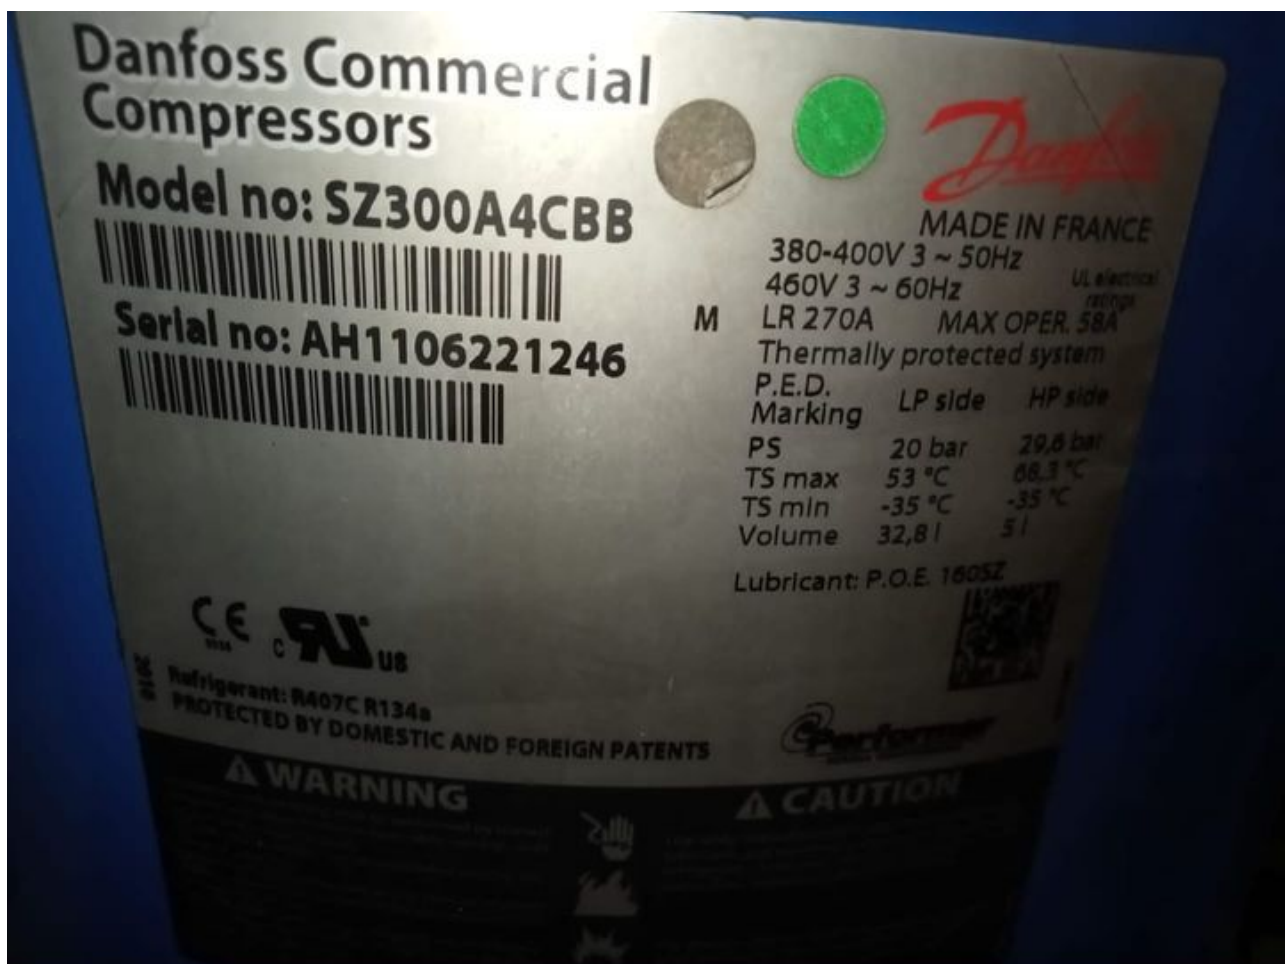

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Danfoss, SZ300A4cbb, 25 hp, 72800 W,
248300 Btu/h, R407C, 400v/3/50hz 460v/3/60hz

**Mbsm.pro, COMPRESSOR,
CUBIGEL, GLY12RA, 3/8 HP++,
R134A, HMBP, 220/240V 50HZ**

written by Lilianne | 14 April 2022

cubigel
compressors

GLY12RA

220-240V~50Hz

PH1

R134a

THERMALLY PROTECTED




CE EAC

MADE IN SPAIN




08282



Mbsm.pro, COMPRESSOR, CUBIGEL, GLY12RA, 3/8 HP++, R134A, HMBP,
220/240V 50HZ

Mbsm.pro, Compressor, Westron, QD142H, LBP, 3/8 hp, 333 w, 220-240V/50Hz

written by Lilianne | 14 April 2022

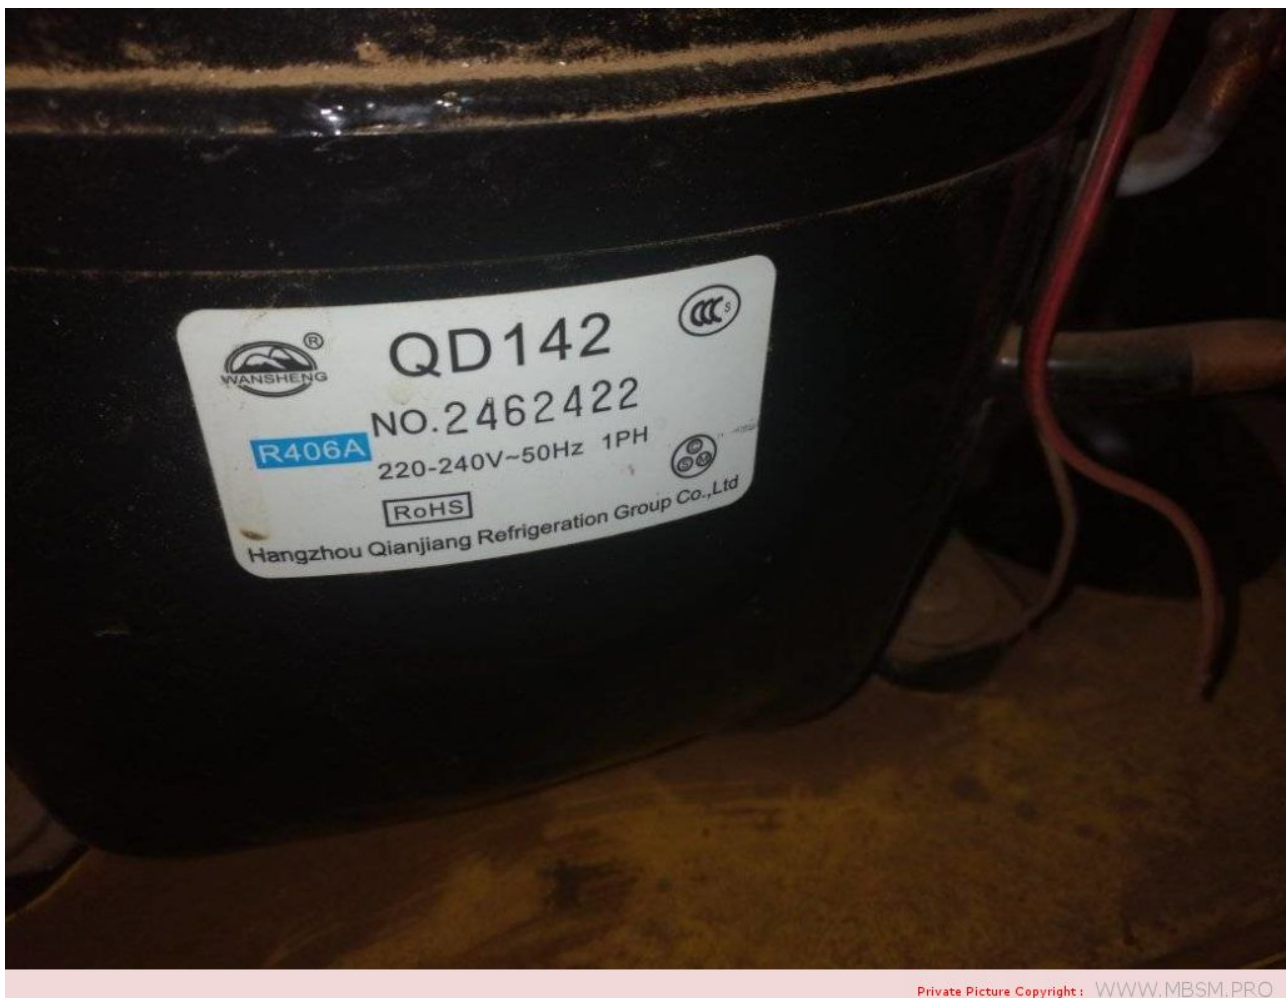

Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, Westron, QD142H, LBP, 3/8 hp, 333 w,
220-240V/50Hz

**Mbsm.pro, Compressor, NL60FB,
1/5 Hp, Lbp, R290, 220v, 1
phase 50 hz**

written by Lilianne | 14 April 2022



Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, NL60FB, 1/5 Hp, Lbp, R290, 220v, 1 phase 50 hz

**Mbsm.pro, Climatiseur,
MSAGB-12HRN1-Q, 12000 Btu/h,
R410a, 300g, Chaud et froid,
5 fils, T1 (Méditerranée), 1
phase, 220 V, 8.4 A**

written by Lilianne | 14 April 2022

Midea

⚠ PRUDENCE

1- VEILLEZ A EVACUER L'AIR A L'INTERIEUR DE L'UNITE
INTERIEUR ET LES TUYAUX AVEC POMPE A VIDE

ÉVITEZ QUE LA QUANTITE ADDITIONNEL DE

CEX مبرد ذو نظام سبليت

MSAGB-12HRN1-Q	النموذج
MSAGB-12HRN1-Q	نموذج الوحدة الداخلية
MSAGB-12HRN1-Q	نموذج الوحدة الخارجية
3224 واط	قدرة التبريد
3341 واط	قدرة التسخين
R410A/1.03KG	غاز التبريد
4.2 ميغا باسكال	الضغط الأقصى
الدفع 4.2 ميغا باسكال الامتصاص 1.5 ميغا باسكال	ضغط العمل المفرط
220-240ف, 50هرتز وحيد المراحل	التواتر الاسمي
8.4 أمبير	التيار الاسمي
1850 واط	استطاعة الاستهلاك الاسمية
IP24	درجة مقاومة الوحدة الخارجية
يحتوي على غاز نو مفعول مفلور امكانية الحثراز العالمي 2088 ما يعادل 2.15 طن من CO2	

Midea

Mbsm.pro, Climatiseur, MSAGB-12HRN1-Q, 12000 Btu/h, R410a, 300g, Chaud et froid, 5 fils, T1 (Méditerranée), 1 phase, 220 V, 8.4 A

**Mbsm.pro, Compressor,
d91c18raws, 1/4 Hp, 227 W,
Lbp, R134a, 220v, 1 phase 50
hz, Compressor AC Panasonic,
D Series, 744 btu/h, 195
kcal/h**

written by Lilianne | 14 April 2022



D91C18RAW5 (RSIR) : Reciprocating Compressors (Fixed Speed)

Product

Reciprocating Compressors (Fixed Speed)

Series/Type

D Series (Reciprocating Fixed Speed, R134a, LBP)

Parts no


D91C18RAW5(RSIR)

SpecificationMbsm_dot_pro_private_PDF_PDF_panasonic-
compressor-Serie-D

Item	Performance characteristics
Refrigerant	R134a
Displacement (cm ³)	9.1
Voltage (V)	220/240
Frequency (Hz)	50
Motor Type	RSIR
Capacity@ASHRAE	227
COP@ASHRAE	1.29/1.24
Capacity@CECOMAF	–
COP@CECOMAF	–



MODEL D91C18RAW5
220/240V~ 50Hz 1PH R-134a
THERMALLY PROTECTED
MATSUSHITA ELECTRIC IND. CO., LTD.
SINGAPORE



Performance

Application : Low Back Pressure
 Refrigerant : R134a (CF₃CH₂F)
 Evaporator Temperature Range : -35°C to -5°C

Series	Model	Displacement (cm ³)	Voltage / Frequency	Motor Type	ASHRAE		CECOMAF	
					Capacity	COP	Capacity	COP
					W	W/W	W	W/W
D	D77C15RAW5	7.7	220/240V 50Hz	RSIR	186 / 186	1.27 / 1.24	-	-
				RSCR	186 / 186	1.32 / 1.27	-	-
	D77C17GAX6	7.7	220V 60Hz	RSIR	236	1.25	-	-
				RSCR	-	-	-	-
	D77C17RAT6	7.7	110V 60Hz	CSIR	-	-	-	-
				CSCR	236	1.34	-	-
	D77C18RAX5	7.7	220V 50Hz	RSIR	186	1.24	-	-
				RSCR	186	1.31	-	-
	D91C18RAW5	9.1	220/240V 50Hz	RSIR	227 / 227	1.29 / 1.24	-	-
				RSCR	227 / 227	1.37 / 1.31	-	-
	D91C18TA00	9.1	100V 50/60Hz	CSIR	-	-	-	-
				CSCR	227 / 288	1.29 / 1.39	-	-
D91C19CAS5	9.1	200V 50Hz	CSIR	227	1.28	-	-	
			CSCR	-	-	-	-	
D91C21RAX5	9.1	220V 50Hz	RSIR	227	1.28	-	-	

Mbsm_dot_pro_private_picture_D91C23GAX6Télécharger
 Mbsm_dot_pro_private_PDF_PDF_panasonic-compressor-Serie-DTélécharger



D91C18RAW5

fx

	I	H	G	F	A	
220 / 240 / 50 HZ						1
COOLING CAPACITY				الإزاحة	MODEL	2
5	W -23	B T U	k CAL/HR	Displ.C		3
	135	461	116	5.1	D51C10RAW5	4
	135	461	116	5.1	D51C90RAW5	5
	141	481	121	5.7	D57C10RAW5	6
	141	481	121	5.7	D57C13RAX5	7
	160	546	138	6.6	D66C13RAW5	8
	151	515	130	6.6	D66C13RAX5	9
	186	635	160	7.7	D77C15RAW5	10
	186	635	160	7.7	D77C18RAX5	11
	227	774	195	9.1	D91C18RAW5	12
	227	774	195	9.1	D91C21RAX5	13
	298	1017	256	11.0	D110C21RAX5	14
	298	1017	256	11.0	D110C21RAZ5	15
	298	1017	256	11.0	D110C21RBX5	16
	298	1017	256	11.0	D110C24GAX5	17
						18
						19
						20
220 / 240 / 50 HZ						21
COOLING CAPACITY				الإزاحة	MODEL	22
5	W -23	B T U	k CAL/HR	Displ.C		23
	163	556	140	5.7	DA57C11RAY5	24
	184	628	158	6.6	DA66C12RAY5	25
	214	730	184	7.7	DA77C15RAY5	26
						27
					D B	28
	187	638	161	6.6	DB66C10RAW5	29
	184	628	158	6.6	DB66C12RAY5	30
	184	628	158	6.6	DB66C14RBX5	31
	204	696	175	7.3	DB73C13RAY5	32
	214	730	184	7.7	DB77C14RAY5	33
	214	730	184	7.7	DB77C16RBX5	34
	241	822	207	8.6	DB86C16RAY5	35
	253	863	218	9.1	DB91C14RAW5	36

+ دانفوس -

باناسونيك

ZMC



**Mbsm.pro, Compressor,
AE820et-900-a4, AEA2411ZXD,
Tecumseh, 1/3 HP, 115V, 1600
BTU, R404A, Hermetic, AE2
Compressor, lbp**

written by Lilianne | 14 April 2022




Private Picture Copyright: WWW.MBSM.PRO

Mbsm.pro, Compressor, AE820et-900-a4, AEA2411ZXD, Tecumseh, 1/3 HP, 115V, 1600 BTU, R404A, Hermetic, AE2 Compressor, lbp

Mbsm.pro, COMPRESSOR, AZ

1328A, 1/10 HP, AZ1328A, 68 w, 58 kcal/h, 234 btu/h, 1 phase, 220 v, r12, TECUMSEH EUROPE

written by Lilianne | 14 April 2022



FICHE TECHNIQUE COMPRESSEUR

N° 1010 - F ind a


BP
R12

AZ1328A


Tension F: 220-240V / 50Hz monphasé

code : 2023431

production frigorifique	fréquence	watt	Kcal/h	BTU/h	Puissance sonore
STANDARD	50Hz	68	58	234	35 dBA
CECOMAF	50Hz	52			

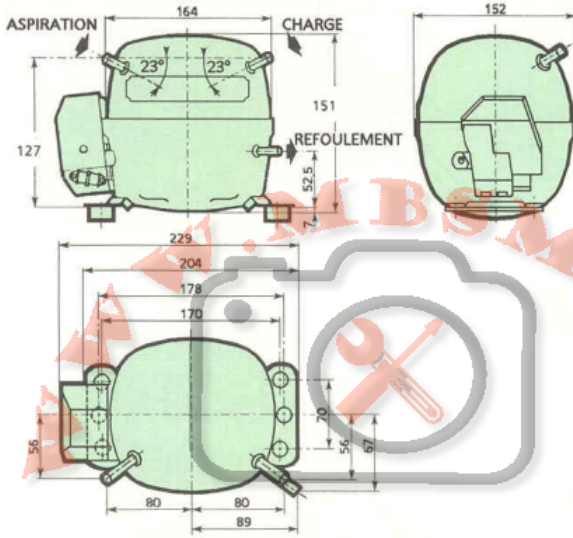


MONTAGE SUSPENSION



Couple de serrage conseillé : 5 à 10Nm
*Pièces non fournies

APPAREILLAGE ELECTRIQUE

PTC



Bois conduite Ø ext en mm

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, COMPRESSOR, AZ 1328A, 1/10 HP, AZ1328A, 68 w, 58 kcal/h, 234 btu/h, 1 phase, 220 v, r12