

Mbsm.pro, Refrigerator, Electrolux,
308 Liters, Silver, Ert45g2hqi,
Compressor, QD Compressor, R600a,
QD75Y, 1/6HP, LBP

Category: Refrigerator

written by Lilianne | 29 September 2022



Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_qd75ybTélécharger

- electrolux model ERT45G2HQI
- VOLTAGE / FREQUENCY 220V/60Hz
- Total gross volume (l) 450
- Total net volume (l) 308
- Compressor type and number QD75YB
- Refrigerant (R600a / R134a) R600a
- Frost Top Mount Refrigerator Electrolux 308 Liters Silver – Ert45g2hqi

Model	HP	Power	Refrigerant	Voltage
QD65Y	1/8HP	80W	600a	220/50hz with 60Hz
QD75Y	1/6HP	88W		110V OR 220V
QD85Y	1/5HP	102W		
QD91Y	1/5HP+	105W		
QD103Y	1/4HP	123W		
QD110Y	1/4HP	132W		
QD128Y	1/3HP	150W		

QD142Y 1/3HP 166W

QD153Y 1/3HP+ 170W

ENERGIA

Fabricante

Electrolux


Modelo

ERT45G2HQI

Tipo de Artefacto

Refrigerador-Congelador

Más eficiente (Menor Consumo)

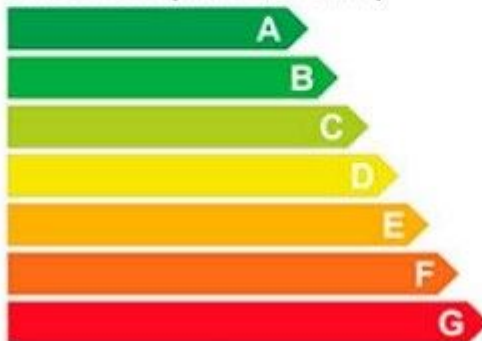

A

Menos eficiente (Mayor Consumo)

Consumo de Energía (kWh/año)

345

El consumo real varía dependiendo de las condiciones de uso del artefacto y su localización

Consumo de energía específico (kWh/año)/litro

1,12

Clase de clima

Clasificación del compartimento de baja temperatura

SUBTROPICAL (ST)



Volumen neto de alimentos frescos (litros)

232

Volumen neto del congelador (litros)

76

Ruido dB(A) re 1 pW


42

Compare este producto con otros de similares características

Los resultados se obtienen aplicando los métodos de ensayo descritos en las Normas Técnicas Peruanas e internacionales correspondientes

Esta etiqueta no debe retirarse del artefacto hasta que esta haya sido adquirido por el consumidor final



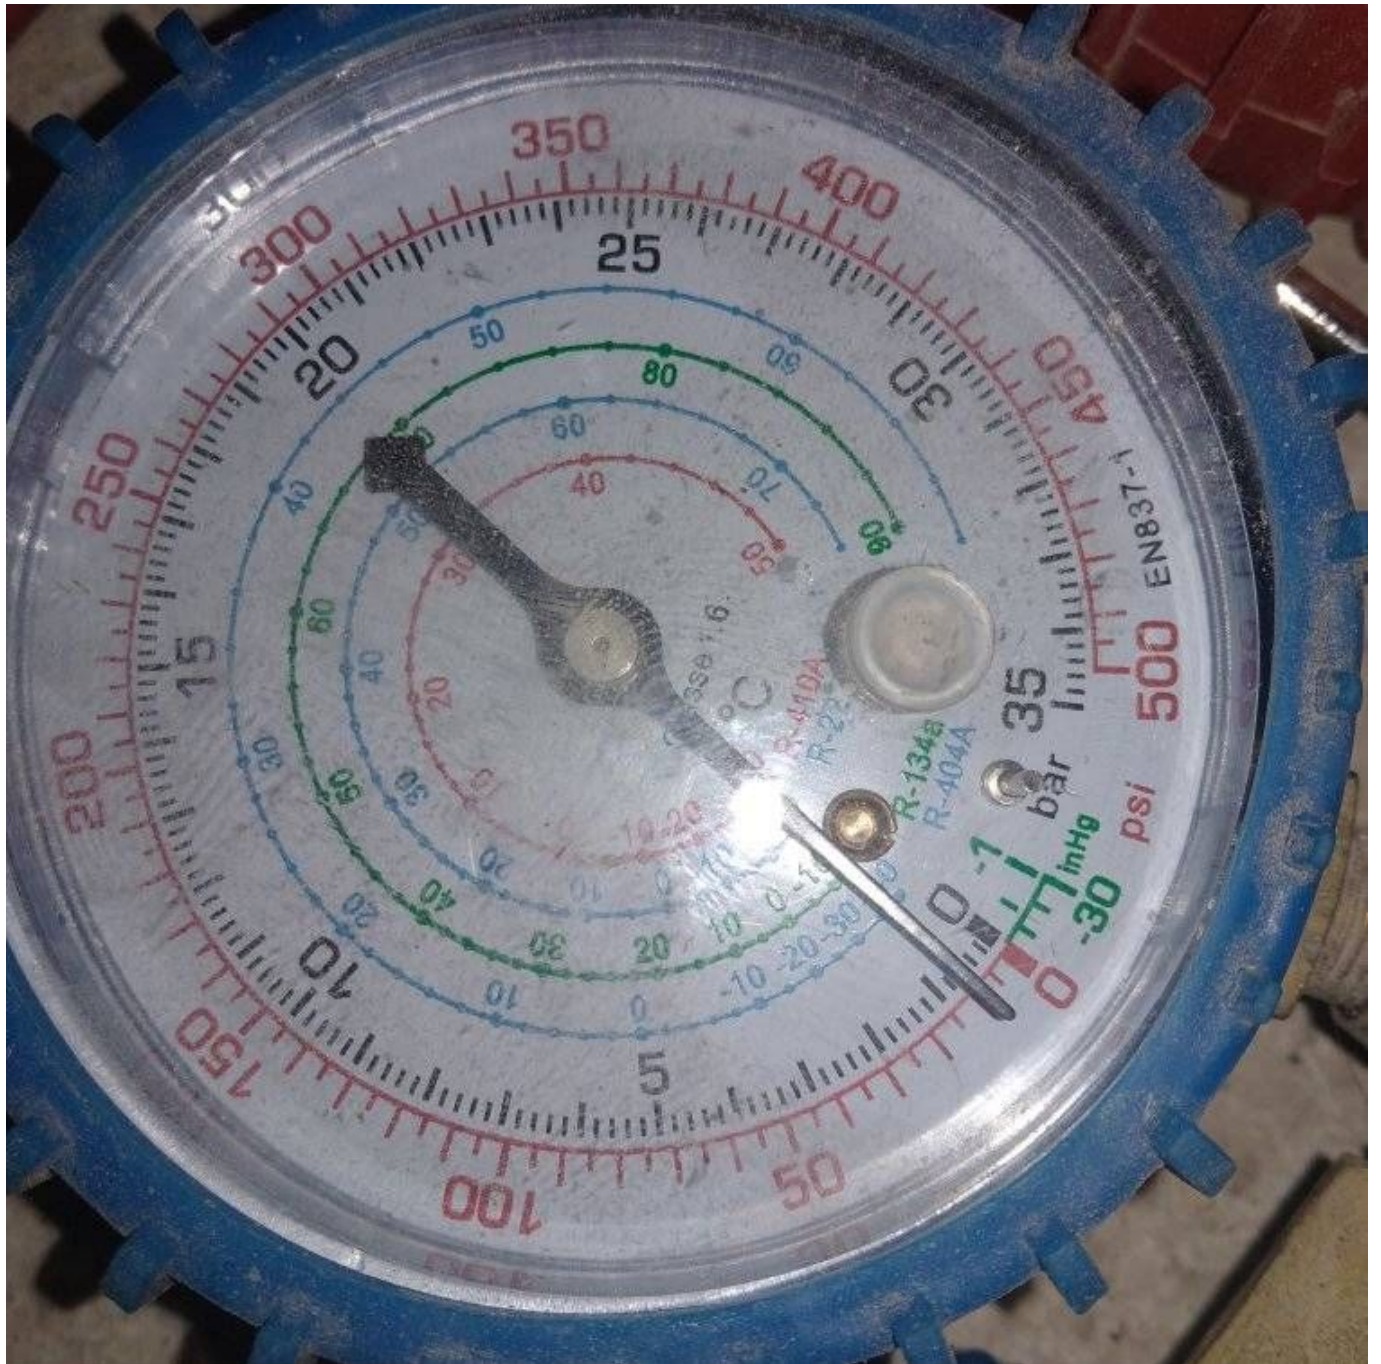

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO



308 L



钱江制冷“WANSHENG”万胜牌R600a LBP制冷压缩机技术参数表(续)

产品系列	产品型号	电压/频率 (V/Hz)	汽缸容积 (cm ³)	制冷量 (W)		能效COP (W/W)		电机类型	启动器	启动电容 (μF)	运行电容 (μF)	冷却方式
				Ashrae (-23.3°C)	CECOMAF (-25°C)	Ashrae (-23.3°C)	CECOMAF (-25°C)					
				WD	WD142Y	220~240/50	14.2					
	WD142YG		14.2	240	179	1.50	1.17	RSIR	PTC	/	/	F
	WD142YV		14.2	240	179	1.70	1.33	RSCR	PTC	/	5	F
	WD142YT		14.2	240	179	1.85	1.45	RSCR	e-PTC	/	5	F
	WD153Y		15.3	260	194	1.45	1.14	RSIR	PTC	/	/	F
	WD153YG		15.3	260	194	1.50	1.17	RSIR	PTC	/	/	F
	WD153YV		15.3	260	194	1.70	1.33	RSCR	PTC	/	5	F
	WD153YT		15.3	260	194	1.85	1.45	RSCR	e-PTC	/	5	F
	WD188YG		18.8	288	215	1.50	1.17	RSCR	PTC	/	5	F
N	QD3511Y	110~120/60	3.3	63	47	1.28	1.00	RSIR	PTC	/	6	S
	UKN35YAL		3.3	65	49	1.30	1.02	RSIR	PTC	/	/	S
	UKN43YAL		4.3	85	64	1.30	1.02	RSIR	PTC	/	/	S
	UKN52YAL		5.2	95	71	1.30	1.02	RSIR	PTC	/	/	S
	UKN60YA		6.0	116	87	1.30	1.02	RSIR	PTC	/	/	S
	UKV35YAX		3.3	63	47	1.50	1.17	RSCR	PTC	/	6	S
	UKV43YAX		4.3	85	64	1.50	1.17	RSCR	PTC	/	6	S
	UKV52YAX		5.2	100	75	1.50	1.17	RSCR	PTC	/	6	S
	UKN35YAT		3.3	63	47	1.70	1.33	RSCR	e-PTC	/	6	S
J	UKT60YAX	110~120/60	6.0	118	88	1.50	1.17	RSCR	PTC	/	6	S
	UKT75YA		7.5	145	108	1.30	1.02	RSIR	PTC	/	/	S
N	QD35YB	220~240/50, 60	3.3	63	47	1.30	1.0	RSIR	PTC	/	/	S
	WV43YB		4.3	85	64	1.30	1.0	RSIR	PTC	/	/	S
	WV52YB		5.2	100	75	1.30	1.0	RSIR	PTC	/	/	S
J	QD65YB		6.5	130	97	1.40	1.1	RSIR	PTC	/	/	S
	QD75YB		7.5	150	112	1.40	1.1	RSIR	PTC	/	/	S

Private Picture Copyright : WWW.MBSM.PRO

