

**www.mbsm.pro , ASD65 , R134A  
, 220V/50Hz , 1/5HP 173W  
, Huaguang , Refrigerator,  
Compressor , LBP**

written by Lilianne | 6 January 2019

www.mbsm.pro , ASD65 , R134A , 220V/50Hz , 1/5HP 173W , Huaguang  
, Refrigerator, Compressor , LBP

---

**Mbsm.pro , Compresseur Aspera  
, Embraco NT6220Z , R134a  
, power 3/4 Hp, displacement  
22.40 cc , gas R134a HMBP ,  
220/240V**

written by Lilianne | 6 January 2019

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power  
3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

# **EMBRACO Asprea Compressor NT6220Z**

## **Technical Details**

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP
- ASPERA


SKU: 3070180

## **Suitable For/Compatible With**

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO

embraco

NT6220Z



CE

THERMALLY PROTECTED		200 - 240V ~ 50Hz
	R 134a	230V ~ 60Hz
POE. OIL 450CC	1 PH	

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE



212CN06

FA

M13G/TF6

embraco NT




R134a

HBP

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

# EM/NE/NT/NJ

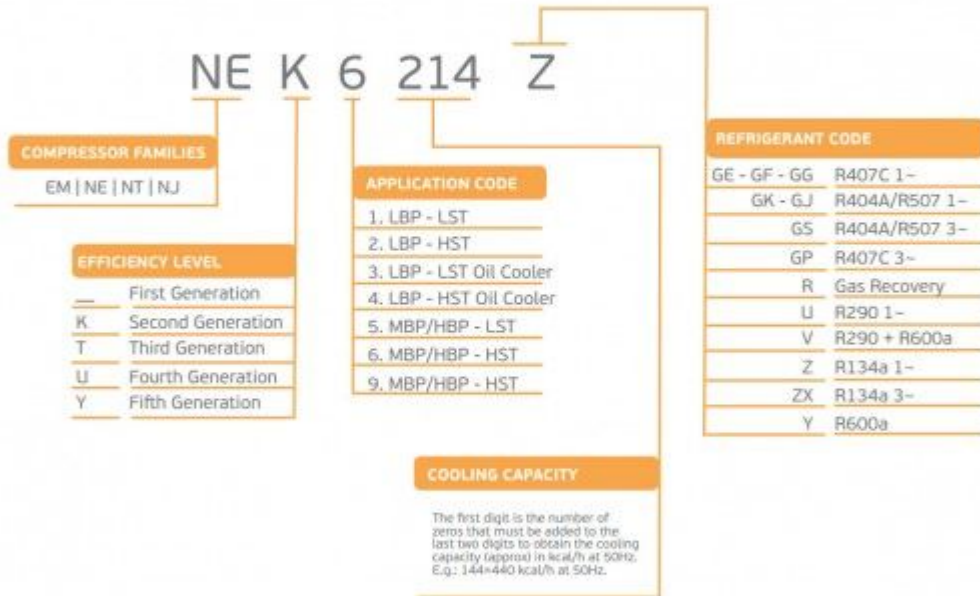

50Hz 50-60Hz	R134a							
	LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	HBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NT NTU					NT6215Z	C / N	1.405	17,39
					NT6217Z	A / N	1.619	20,44
					NT6220Z	N	1.744	22,37
					NTU6222ZV	A	2.117	23,70
					NTU6224ZV	A	2.582	27,80

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

**Mbsm.pro , Qb73c15gax5 , R134a  
 , Refrigeration Compressor  
 , 1/4 Hp, Panasonic compressor  
 catalogue, QB series , 1Ph ,**

# 220V 50Hz

written by Jamila | 6 January 2019



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

Mbsm.pro , Qb73c15gax5 ,R134a , Refrigeration Compressor ,1/4 Hp, Panasonic compressor catalogue, QB series , 1Ph , 220V 50Hz

Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - WW		Capacity		COP - WW		
		W	kcal/hr	RSIR	RSCR	W	kcal/hr	RSIR	RSCR	
220V 50Hz/60Hz	QB51C99GAX0	128	110	1.14	-	157	135	1.17	-	170V-250V 50Hz 187V-242V 60Hz
	QB57C11GAX0	146	126	1.18	-	175	151	1.22	-	
	QB66C16GAX0	165	142	1.20	-	200	172	1.27	-	
	QB77C18GAX0	202	174	1.21	-	224	193	1.27	-	
	QB91C24GAX0	236	203	1.19	-	255	219	1.22	-	
220V 50Hz	QB66C13GAX5	165	142	1.19	-					170V-250V
	QB73C15GAX5	185	159	1.19	-					
	QB77C16GAX5	202	174	1.22	-					
	QB91C19GAX5	236	203	1.25	-					



Rated voltage / Frequency	Model	ASHRAE								Voltage range
		50Hz				60Hz				
		Capacity		COP - WW		Capacity		COP - WW		
		W	kcal/hr	CSIR	RSCR	W	kcal/hr	CSIR	RSCR	
220V 50z/60Hz	QB110C25CAX0	273	235	1.18	-	279	240	1.19	-	170V-250V 50Hz 198V-242V 60Hz

PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)



PictureS Mbsm Dot Pro : [www.mbsm.pro](http://www.mbsm.pro)

## Performance DATA

## Application &amp; Refrigerant LBP R134a

Voltage	Model	Displacement cm <sup>3</sup>	*2) Capacity (W)						*3) C.O.P.		*4) Motor type	Compressor cooling *5)			Net weight kg		Oil charge cm <sup>3</sup>	
			Evaporating temperature						NO	YES		ST	OC	FC	ST/FC	OC	ST/FC	OC
			-30°C	-25°C	-23.3°C	-20°C	-15°C											
*6) 100V 50/60Hz	QB57C88RA00	5.65	118	161	178	213	271	1.27	1.33	RSIR/RSCR	O	-	O	9.1	-	250	-	
	QB66C12CA00	6.55	119	164	185	219	293	1.19	-	CSIR	-	-	O	8.8	-	250	-	
	QB66C13RA00	6.55	133	182	200	239	304	1.28	1.37	RSIR/RSCR	O	-	O	9.4	-	280	-	
	QB86C18TA00	8.56	170	226	248	295	376	-	1.35	CSCR	-	-	O	9.9	-	280	-	
	QB91C18CA00	9.07	163	226	251	303	394	-	1.21	CSIR	-	-	O	9.6	-	250	-	
220V 50Hz	QB66C13GAX5	6.55	108	149	165	200	263	1.23	-	RSIR	O	-	-	9.2	-	250	-	
	QB73C15GAX5	7.27	121	167	185	224	294	1.23	-	RSIR	O	O	-	9.7	9.9	250	300	
	QB77C16GAX5	7.69	131	182	202	245	319	1.26	-	RSIR	O	O	-	9.8	10.0	250	300	
	QB86C18GAX5	8.56	145	200	222	268	347	1.26	-	RSIR	O	O	O	9.9	10.1	250	300	
	QB91C19GAX5	9.07	154	213	236	285	372	1.29	-	RSIR	O	O	O	10.0	10.5	250	300	
	QB110C25GAX5	10.86	176	246	273	331	432	1.18	-	RSIR	-	O	O	10.4	10.6	250	300	
*4) 220-240V 50Hz	QB51C74GAW5	5.10	84	116	128	153	196	1.21	-	RSIR	O	-	-	8.7	-	250	-	
	QB57C87GAW5	5.65	97	132	146	175	225	1.23	-	RSIR	O	-	-	8.7	-	250	-	
	QB66C97GAW5	6.55	108	149	165	200	263	1.25	-	RSIR	O	O	-	9.2	-	250	-	
	QB73C12GAW5	7.27	121	167	185	224	294	1.26	-	RSIR	O	O	-	9.7	-	250	-	
	QB77C13GAW5	7.69	131	182	202	245	319	1.27	-	RSIR	O	O	-	9.8	-	250	-	
	QB86C13GAW5	8.56	145	200	222	268	347	1.27	-	RSIR	O	O	O	9.9	-	250	-	
	QB91C16GAW5	9.07	154	213	236	285	372	1.28	-	RSIR	O	O	O	10.0	-	250	-	



