

**MBSM.PRO , Zel Compressors
,Low back pressure, gml200a
152W , gml200a 152W, GML180A
144W, gml160g 129W, gml140a
108W, GML110A 90W, R134a ,
220-240V 50HZ**

written by Jamila | 10 October 2018

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W ,
gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W,
GML110A 90W, R134a , 220-240V 50HZ

**Zel gml200a gml180a gml160g
gml140a gml110a r134a
Compressors**

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:
Mainland China

Brand:

West of Monza

Color classification:

gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:

R134a


Voltage:

220-240V 50HZ

Working conditions:

Low back pressure



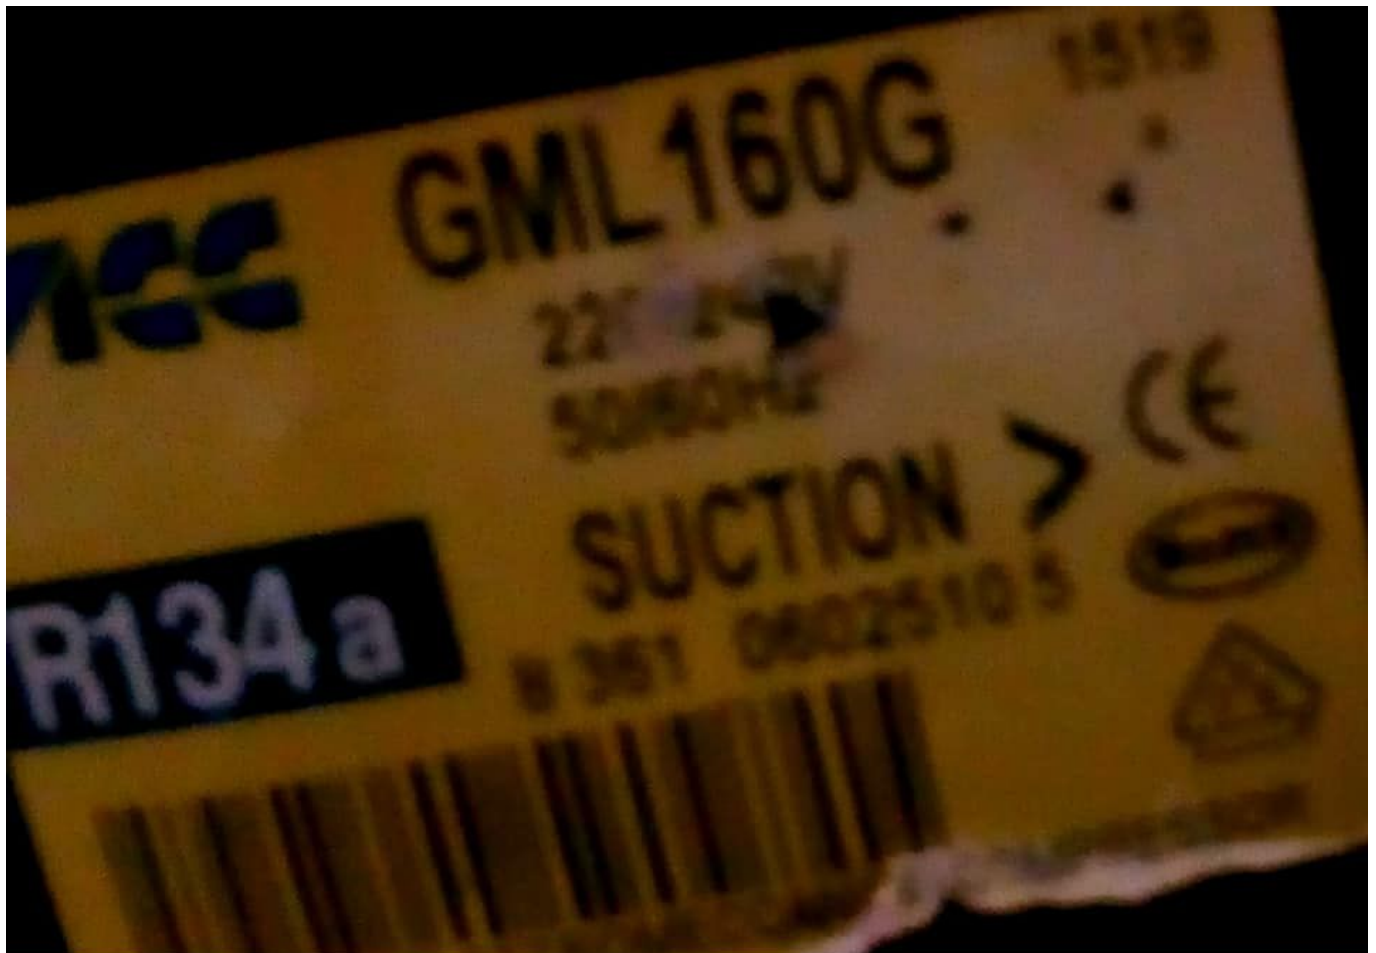

Picture5 Mbsm Dot Pro : www.mbsm.pro

**MBSM.PRO , Compressor,
Electrolux-Zem GL60AA R134A
,1/6 HP , 1PH , 220-240 V 50
Hz**

written by Jamila | 10 October 2018

MBSM.PRO , Compressor, Electrolux-Zem GL60AA R134A ,1/6 HP ,
1PH , 220-240 V 50 Hz



PictureS Mbsm Dot Pro : www.mbsm.pro

- Puissance en cheval 1/6 CV
- Cylindrée 5.99 cm³
- 220-240 V 50 Hz
- Gaz R134a LBP
- Température d'utilisation max. 32°C
- Avec boîtier et système de démarrage

La photo montre l'aspect du compresseur, pas son étiquette réelle

Codes fabricants

- ACC-GL60AA
- ACC-GL60AB
- ACC-GL60AH
- CUBIGEL-GL60AA
- CUBIGEL-GL60AB
- CUBIGEL-GL60AH
- MONDIAL ELITE-4106004
- MONDIAL ELITE-1147031
- Embraco Aspera- B1112Z



ZEM

R 134a



GL

CE



BEAB
Approved

3 25

220-240V

N/A

017



PictureS Mbsm Dot Pro : www.mbsm.pro



PictureS Mbsm Dot Pro : www.mbsm.pro

Mbsm_dot_pro_private_PDF_GL60AATélécharger
Mbsm_dot_pro_private_PDF_-GL60AATélécharger



Type: Hermetic piston compressors **Producer:** ACC **Series:** HMBP
Model: GL60AA
General data

Refrigerant:	R134a
Discharge element:	C
Cooling:	S
Maximum ambient temperature [°C]:	43

Compressor's data

Cylinder capacity [cm ³]:	6
Displacement [m ³ /h]:	1
Weight [kg]:	9,1
Oil charge [cm ³]:	265
Oil type:	ISO VG 19 ESTER

Engine's data

Engine type:	RSIR
Power [KM]:	1/6
Starting element:	LST
Power supply:	220V 50Hz
Voltage range:	187-264
Locked rotor current [A]:	9,9
Running winding resistance (25°C) [Ω]:	15,6
Starting winding resistance (25°C) [Ω]:	21,31

Electrical data

Relays:	3003
Shielding element:	MRA38028, T0508, AF18FU
Starting capacitor volume [μF]:	

Connections

	millimeters	inches
Suction tube:	6,5	
Service tube:	6,5	

Discharge tube:	4,9		
-----------------	-----	--	--