

mbsm.pro , Compresseur Aspera , Embraco , NEK2168GK , R404a/R507 , LBP , 3/4 HP, nominal output: 707 W

written by Lilianne | 18 April 2019

EMBRACO is a company specialized in cooling solutions and world leader in the hermetic compressor market. Our mission: provide innovative solutions for a better quality of life, always

attentive to technological excellence and sustainability.

Technological leadership, operational excellence and sustainability are some of the pillars

which ensure the EMBRACO differential over other companies in the world market. Its

products are now considered the favorite leading home appliance manufacturers by major automakers and are spotlighted by manufacturers of commercial refrigeration equipment.

With global operations and production capacity exceeding 34 million units a year, the

company offers solutions that are differentiated for their innovation and low energy

consumption. Its 11.500 employees work in factories and offices located in Brazil

(headquarters), China, Italy, Slovakia, Mexico, the United States and Russia.

Energy efficiency is constantly sought in the processes, products and relationships with

the communities where it operates. Our company is the absolute leader in this segment,

being able to offer products that meet the most restrictive international standards

regarding energy consumption.

As a worldwide leader, EMBRACO tries to anticipate market changes, and in doing so, our company is in a state of permanent transformation. We continuously assess our processes in order to maintain our leadership within the industry and promote growth, without forgetting the pillars of our organization.

Compressor ASPERA NEK2168GK | NEK 2168 GK


Refrigerant	R404/R507
Working range[stC] LBP	-40 to -10
Nominal capacity [W] (evaporating temperature -23,3C, Condensing temperatur +54,4C)	688
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm ³]	14,28
Weight [kg]	11,6

Evaporating temperature +55 C

Evaporating Temperature	Cooling Capacity +/-5%	Power Consumption +/-5%	Current Consumption +/-5%	Gas Flow Rate +/-5%	Efficiency +/-7%			
						(kg/h)	(kcal/Wh)	(W/W)
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-40	226	263	897	370	3,46	6,01	0,61	0,71
-35	309	359	1.224	435	3,57	8,22	0,71	0,82
-30	413	481	1.640	506	3,73	11,06	0,82	0,95
-25	541	629	2.146	584	3,95	14,52	0,93	1,08
-20	691	803	2.740	668	4,21	18,64	1,03	1,20
-15	863	1.004	3.424	759	4,53	23,43	1,14	1,32
-10	1.058	1.230	4.197	856	4,90	28,92	1,24	1,44

Refrigerant:	R404A, R507
--------------	-------------

		R404A / R507							
		LBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]	MBP	VOLT. FREQ.	COOL. CAP. [W]	DISPL. [cc]
NE NEK	NEK2117GK	A	125	4,51	NEK6144GK	A	550	4,51	
	NEK2121GK	A	151	5,44	NEK6165GK	A	743	6,20	
	NEK2125GK	A	182	6,20	NEK6181GK	A	841	7,28	
	NEK2130GK	A	213	7,37	NEK6210GK	A / N	1.005	8,77	
	NEK2134GK	A / N	248	8,77	NEK6213GK	A	1.337	12,11	
	NEK2150GK	A	329	12,11	NEK6217GK	A / N	1.164	14,28	
	NEK2168GK	A	378	14,28					
	NEK2172GK	C	819	16,80					

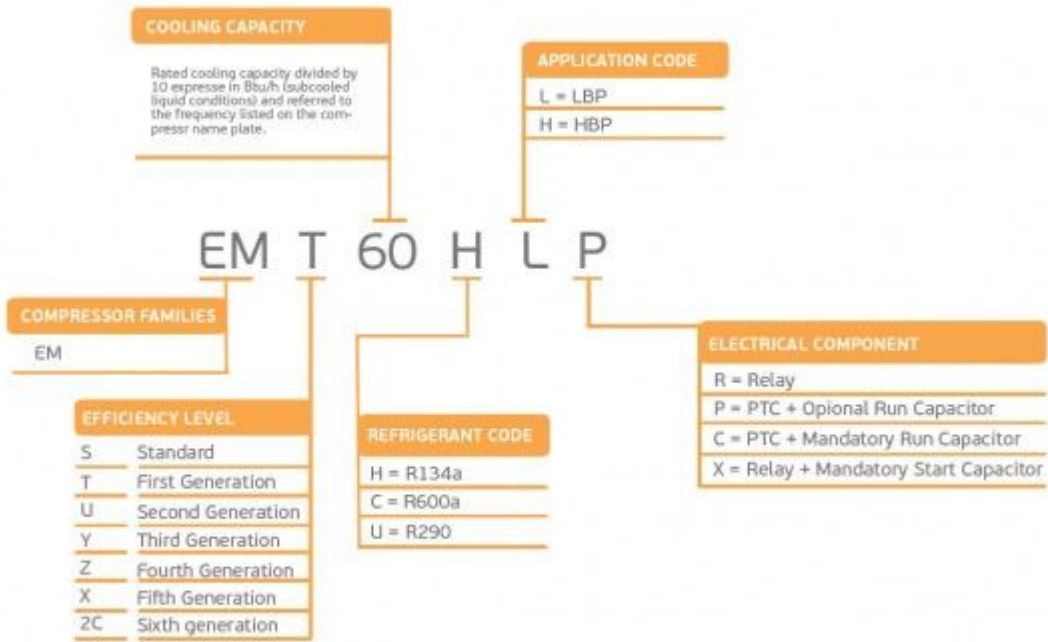

embraco NEK



R404A LBP

Picture5 Mbsm Dot Pro : www.mbsm.pro

■

mbsm.pro , Compresseur Aspera , Embraco NEK2168GK , R404A , LBP , 3/4 HP

Compresseur hermetique de Aspera – Embraco NEK2168GK – R404A
3/4 HP

220-240V 50 Hz

Cylindrée = 14.3 CM3

APPLICATIONS = LBP

Moteur type: CSR

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp ,159 w

written by Jamila | 18 April 2019

Mbsm.pro , Compressor ESC 8.5, R134a, Necchi (530591) , 1/5 Hp
,159 w

	Motore	cm³	Volt	Watt -10°C	Watt -30°C	
RIB5150	A9EV – R22 – 3/8 – LBP	CSR	9,29	220	642	
RIB5160	A11EV – R22 – 1/2 Hp – LBP	CSR	11,11	220	781	
RIB5350	A13EV – R22 – 5/8 Hp – LBP	CSR	13,35	220	967	
RIB5450	N17EV – R22 – 3/4 Hp – LBP	CSR	17,52	220	1221	
RIB5550	N21EV – R22 -1- Hp LBP	CSR	20,68	220	1464	
RIB5650	N23EV – R22 – 1,2 Hp – LBP	CSR	23,18	230	1616	
RIB7104	NB4 COMPRESS. R12 24V. FRAMEC 1/8 =					
RIB7108	NB8 COMPRESS. R12 24V.FRAMEC 175W.=					
RIB7113	NB13HP COMPRESS.R12 24V.FRAMEC 1/3=					

RIBB010	ETR 3 – R134A – 1/12 Hp – LBP	RSIR	3,00	220	127	
RIBB020	ETR 3,5 HP 1/10 R134A – LBP	RSIR	3,50	220	156	
RIBB030	ETR 4 HP 1/8 R134A – LBP	RSIR	4,10	220	179	
RIBB040	ETR 5 – R134a – HP 1/6 – LBP	RSIR	5,12	220	231	
RIBB050	ETR5,5 – R134a – 1/6 Hp – LBP	RSIR	5,55	220	257	
RIBB080	ESC5 – R134a – 1/6 Hp – LBP	RSIR	5,12	220	222	
RIBB100	ESC7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB110	ESC8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB130	ESC9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB140	ESC11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBB200	ESC4H – R134a – 1/8 Hp – LBP	RSIR	4,10	220	177	
RIBB400	ESR 7 – R134a – 1/5 Hp – LBP	RSIR	7,00	220	307	
RIBB410	ESR 8 – R134a – 1/5 Hp – LBP	RSIR	7,75	220	358	
RIBB430	ESR 9 – R134a – 1/4 Hp – LBP	RSIR	9,07	220	424	
RIBB440	ESR11 – R134a – 1/3 Hp – LBP	RSIR	10,63	220	501	
RIBE040	TN17EV – R404 – 3/4 Hp – LBP	CSR	17,52	220		565

RIBE050	TN21EV – R404 – 1 Hp – LBP	CSR	20,68	220		644
RIBE060	TN23EV – R404 – 1,2 Hp – LBP	CSR	23,18	220		726
RIBT999	COMPRESSORE ELECTROLUX DESCR.BOLLA					



Verdichter Type neue Type	Verdichter Type Vorläufer Type	Kälte- mittel	Bereich	1)Betrieb	2)Leistungs- aufnahme Watt	3)Strom- aufnahme A	Öl- füllung cm ³	Bestell-Nr.
mit Esterölfüllung								
*ETR 3	-	R 134 a	LBP	K	68	0,55	185	*230.051
*ETR 3,5	-	R 134 a	LBP	K	81	0,58	185	*230.053
*ETR 4	-	R 134 a	LBP	K	89	0,64	185	*230.055
*ETR 5	-	R 134 a	LBP	K	109	0,76	185	*230.057
*ETR 5,5	-	R 134 a	LBP	K	118	0,80	185	*230.059
*ESR 7	ESC 7	R 134 a	LBP	K	127	0,83	220	*230.073
*ESR 8	ESC 8	R 134 a	LBP	K	149	1,00	220	*230.075
*ESR 8,5	ESC 8,5	R 134 a	LBP	K	159	1,07	220	*230.077
*ESR 9	ESC 9	R 134 a	LBP	K	177	1,20	220	*230.079
*ESR 11	ESC 11	R 134 a	LBP	K	215	1,42	220	*230.081
ETR 4H	ES(C)R4H	R 134 a	HBP	K	187	1,13	185	-
ETR 5H	ES(C)R5H	R 134 a	HBP	K	231	1,30	185	-
ESR 7H	ESC 7H	R 134 a	HBP	K	208	1,61	220	-
ESR 9H	ESC 9H	R 134 a	HBP	K	396	2,31	220	-
ESR 11H	ESC 11H	R 134 a	HBP	K	472	2,64	220	-
TA 13 EV	-	R 404 A	LBP	K/E	463	2,15	950	230.095
TN 17 EV	-	R 404 A	LBP	K/E	627	2,83	950	230.097
TN 21 EV	-	R 404 A	LBP	K/E	727	3,61	950	230.099

Picture5 Mbsm Dot Pro : www.mbsm.pro

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a , power 3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

written by Lilianne | 18 April 2019

Mbsm.pro , Compresseur Aspera , Embraco NT6220Z , R134a ,power
3/4 Hp, displacement 22.40 cc , gas R134a HMBP , 220/240V

Compresseur hermetique de Aspera – Embraco NT6220Z – R134a

3/4 HP

220V 50Hz 1~

Cylindrée = 22.37 CM3

APPLICATIONS = HBP

Moteur type: CSIR

EMBRACO Asprea Compressor NT6220Z

Technical Details

- 220/240V
- 50Hz
- power 3/4 Hp, displacement 22.40 cc
- gas R134a HMBP
- ASPERA


SKU: 3070180

Suitable For/Compatible With

- NT6220Z ASPERA
- NT6220Z-CSIR ASPERA
- NT6220Z EMBRACO
- NT6220Z-CSIR EMBRACO

embraco

NT6220Z



CE

THERMALLY PROTECTED		200 - 240V ~ 50Hz
	R 134a	230V ~ 60Hz
POE. OIL 450CC	1 PH	

MADE IN SLOVAKIA NO START WITHOUT STARTING DEVICE



212CN06

FA

M13G/TF6


embraco NT



R134a

HBP

EM/NE/NT/NJ

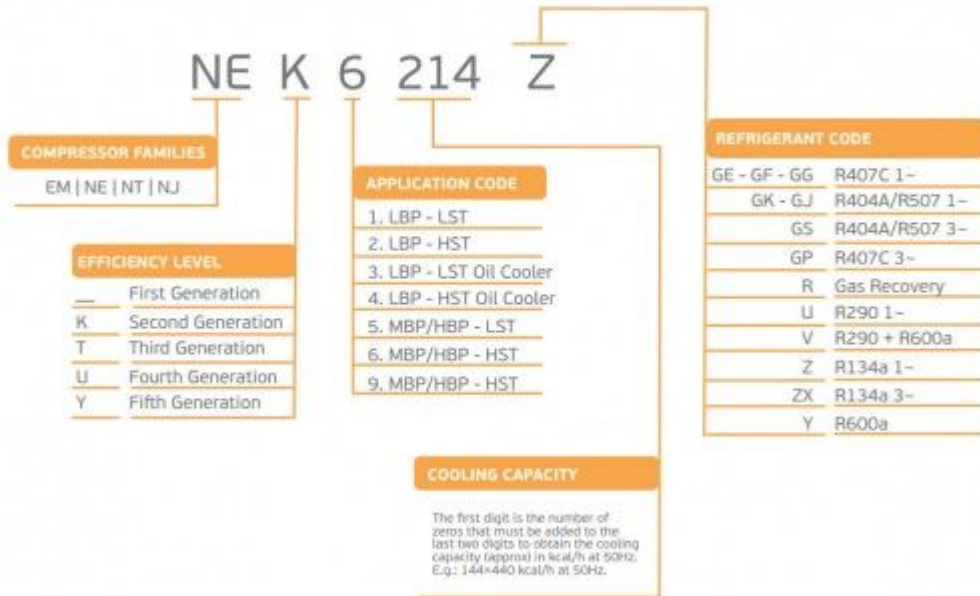

PictureS Mbsm Dot Pro : www.mbsm.pro



Mbsm.pro , China , Freezer Compressor, for Small Refrigerator, Mk Series- Adw66, Adw66, R134A Gas,

**220V, 1/4-HP, 1/5++ hp ,
220V, Lbp, Rsir , cooling
capacity 165W**

written by Jamila | 18 April 2019



Mbsm.pro , China ,Freezer Compressor, for Small Refrigerator,
Mk Series-Adw66, Adw66, R134A Gas, 220V, 1/4-HP, 1/5++ hp ,
220V, Lbp, Rsir , cooling capacity 165W

**MBSM.PRO ,Copeland ,KCE432HAG
,Compresseur Hermétique,
1/4HP, R134, 1ph , Afcon
Industrial Equipment,High /
Medium temperature (HBP /
CBP)**

written by Jamila | 18 April 2019



MBSM.PRO ,Copeland ,KCE432HAG ,Compresseur Hermétique, 1/4HP,
R134, 1ph , Afcon Industrial Equipment,High / Medium
temperature (HBP / CBP)

**MBSM.PRO , Zel Compressors
,Low back pressure, gml200a
152W , gml200a 152W, GML180A
144W, gml160g 129W, gml140a
108W, GML110A 90W, R134a ,
220-240V 50HZ**

written by Jamila | 18 April 2019

MBSM.PRO , Zel Compressors ,Low back pressure, gml200a 152W ,
gml200a 152W, GML180A 144W, gml160g 129W, gml140a 108W,
GML110A 90W, R134a , 220-240V 50HZ

**Zel gml200a gml180a gml160g
gml140a gml110a r134a
Compressors**

- **gml200a 152W**
- **GML180A 144W**
- **gml160g 129W**
- **gml140a 108W**
- **GML110A 90W**

Place of purchase:
Mainland China

Brand:

West of Monza

Color classification:

gml200a 152wgml180a 144wgml160g 129wgml140a 108wgml110a 90W

Refrigeration Agent:

R134a

Voltage:

220-240V 50HZ

Working conditions:

Low back pressure



**Mbsm.pro, GTH93AA ,
compressor coolant R134a ,
220-240V 50Hz MBP 9,8kg,
1/4HP++, 1/3 hp- cylinder
capacity 9,3cm³, 260 W,**

written by Jamila | 18 April 2019

Mbsm.pro, GTH93AA , compressor coolant R134a , 220-240V 50Hz
MBP 9,8kg 1/4HP cylinder capacity 9,3cm³



PictureS Mbsm Dot Pro : www.mbsm.pro

refrigerant	R134a
type	GTH93AA

voltage	220-240 V
frequency	50 Hz
application	MBP
weight	9,8 kg
power	1/4 HP
cylinder capacity	9,3 cm ³
motor system	RSIR/RSCR
height	184 mm
power at -20°C	– W
power at -15°C	– W
power at -10°C	– W
power at -5°C	– W
power at 0°C	– W
power at +5°C	– W

Mbsm_dot_pro_private_PDF_GTH93AA-compresseur-acc-cubigell-gl99aaTélécharger

Mbsm_dot_pro_private_PDF_catalog_zelTélécharger

**Mbsm.pro, ATA72XL, Lbp
compressor, HuaGuang coolant,
R134a, 220-240V 50/60Hz,
1/4HP, 1PH, 205 w, Lbp**

written by Jamila | 18 April 2019

Mbsm.pro , ATA72XL , compressor , HuaGuang coolant , R134a ,
220-240V 50/60Hz , 1/4HP , 1PH

Détails rapides

Lieu d'origine:

Guangdong, Chine

Marque:

Wanbao

Type:

Compresseur de réfrigération

Application:

Pièces de réfrigération

Certification:

ce, CCC / CB / VDE

Réfrigérant:

R134A

Marque:

Wanbao

Tension:

220-240V 50HZ

Déplacement:

72 cm³

Refroidissement:

ST / OC

Type de moteur:

RSIR

Capacité de refroidissement:

185 W

Capacité:
631 BTU

Max. Hauteur "A":
188

Wanbao Group Compressor Co., Ltd (anciennement connue sous le nom de Guangzhou Refrigeration Company Ltd, ci-après dénommée The Co.), a commencé sa production en 1987, est le premier fabricant à introduire une technologie et des équipements étrangers pour la production à grande échelle de compresseurs de réfrigérateurs en Chine . En 2014, The Co. a acquis le fabricant de compresseurs de réfrigérateurs à l'étranger-Italie ACC, puis a fondé l'italien Wanbao-ACC Co., Ltd. Cette action améliore le compresseur Wanbao de l'internationalisation du marché à l'internationalisation de la fabrication et jette des bases solides à l'internationalisation de la marque pour la prochaine étape.

La Co.a quatre bases de production à Guangzhou, Qingdao, Hefei et en Italie, avec une capacité de production annuelle de 26 millions d'unités, forgeant ainsi une configuration mondiale stratégique couvrant les principaux clients nationaux et étrangers. Wanbao Chine approvisionne principalement les grands fabricants de réfrigérateurs nationaux, y compris Haier, Hisense, Midea, Meiling, etc., ainsi que les fabricants d'appareils électroménagers de renommée internationale, y compris Electrolux Whirlpool, etc., en tant que fournisseur mondial. Wanbao-ACC Italy est un fournisseur majeur de fabricants européens d'appareils électroménagers haut de gamme.

Modèle	Réfrigérant	Tension	Capacité de refroidissement (w)	Application	COP (w / w)
AS43	R134a	220V / 50Hz	84	LBP	0,94
AS51	R134a	220V / 50Hz	107	LBP	1,01
ASD43K	R134a	220V / 50Hz	117	LBP	1.13
ASD53K	R134a	220V / 50Hz	144	LBP	1.2
ASD65	R134a	220V / 50Hz	173	LBP	1,23
ATA72X	R134a	220V / 50Hz	205	LBP	1,35
ATA80X	R134a	220V / 50Hz	230 1/4 hp++	LBP	1,35
ANA90	R134a	220V / 50Hz	255	LBP	1,35
AQAW110	R134a	220V / 50Hz	260	LBP	1,15
ANA120	R134a	220V / 50Hz	345	LBP	1,3

Autre compresseur de congélateur wanbao que nous avons :

Pas	HP	Modèle	Réfrigérant	Qté/Une Palette
1	1/10HP	ASD35K	R134a	100
2	1/6HP	ASD53K	R134a	80
3	1/5HP	AQAW66X	R134a	80
4	1/4HP	AQAW77X	R134a	80

5	1/4HP Gros	AQAW91	R134a	80
6	1/3HP	AQAW110	R134a	80
7	3/8HP	AL120	R134a	80
8	1/2HP	AL150	R134a	80
9	1/2HP, grand	AL180	R134a	80

型号 Model	气缸容积 Displacement cm ³	冷却方式 Cooling	电机类型 Motor Type	制冷量 Cooling Capacity		COP			认证 Certification	最大高度“A” Max. Height "A"		
				ASHRAE		CECOMAF		ASHRAE			CECOMAF	
				-23.3°C		-25°C		-23.3°C			-25°C	
W		Btu		W		W/W	EER	W/W				
LBP												
220-240V 50HZ R134a												
T系列 T Series												
ATA72X	7.2	ST/OC	RSIR	205	699	155.3	1.35	4.6	1.05	CCC/CB/VDE	185/188	
ATA80X	8.1	ST/OC	RSIR	230	785	174.2	1.35	4.6	1.05	CCC/CB	185/188	
ATK72X	7.2	ST/OC	RSCR	205	699	154.0	1.40	4.8	1.09	CCC/CB/VDE/CE	185/188	
ATK80X	8.1	ST/OC	RSCR	230	785	174.0	1.40	4.8	1.09	CCC/CB	185/188	
▲ATD50V	5.0	ST	RSIR	140	478	105.2	1.25	4.3	0.98	CCC/CB	182	
ATD66X	6.6	ST/OC	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182	
△ATA50K	5.0	ST	RSIR	144	491	108.9	1.35	4.6	1.05	CCC/CB	182/185	
△ATA66K	6.6	ST	RSIR	190	648	142.8	1.25	4.3	0.98	CCC/CB	182	
ATA66K(OC)	6.6	OC	RSIR	190	648	143.7	1.35	4.6	1.05	CCC/CB	188	
ATA72K(OC)	7.2	OC	RSIR	205	699	154.0	1.35	4.6	1.05	CCC/CB	188	
ATK55	5.5	ST	RSCR	160	546	121.0	1.35	4.6	1.05	CCC/CB	185	
ATK60	6.0	ST	RSCR	180	614	135.0	1.51	5.2	1.18	CCC/CB/CE	185	
ATK66	6.6	ST	RSCR	192	655	144.0	1.55	5.3	1.21	CCC/CB/CE	185	

Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_ATA72X-220-240V_50HZ_R134A-1Télécharger

T0891150725A0208



 **ATA72XL** 

HUAGUANG 220-240V~50 30Hz 1PH R134a 



CB   SECTION

A068962

THERMALLY PROTECTED
Wanbao Group Compressor Co.,Ltd.

PictureS Mbsm Dot Pro : www.mbsm.pro

Private Picture Copyright : WWW.MBSM.PRO



REDMI NOTE 8T
AI QUAD CAMERA



Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A ,1/4HP 230V

written by Jamila | 18 April 2019



Mbsm.pro, GL90TB , COMPRESSEUR ACC CUBIGEL ELECTROLUX, R134A
,1/4HP 230V

- Puissance en cheval 1/4 CV
- Alimentation 220-240 V 50 Hz
- Gaz R134a HMBP
- Cylindrée du compresseur 8,8 cm³
- Température d'utilisation max. 32°C
- Complet avec starter, condensateur, boitier et système de fixation

La photo montre l'aspect du compresseur, pas son étiquette réelle



Codes fabricants

- ACC-GL90TB
- ALPENINOX-83718

- ANGELO P0-34D6510
- CEM-340
- CUBIGEL-GL90TB
- DEXION-022260-00
- ELECTROLUX-83718
- FRIULINOX-995783
- ICEMATIC-19165548
- MARENO-25016599
- MONDIAL ELITE-4106073
- MONDIAL ELITE-4106073+1147212
- NECTA VENDING-986934
- ZANUSSI-83718

Documentation technique du compresseur frigorifique
Cubigel [regarder en dessous](#)



**Mbsm.pro, DAEW00 Compressor ,
HSL27YE-5, 1/4HP , 1PH, R134a
, 220-240V 50Hz, Puissance
frigorifique 244 W, 833 Btu /
h**

written by Jamila | 18 April 2019



Mbsm.pro, DAEW00 Compressor , HSL27YE-5, 1/4HP , 1PH, R134a ,220-240V 50Hz,Puissance frigorifique 244 W, 833 Btu / h